




J e t - L u b e o f C a n a d a L t d .

# AEROSPACE

Anti-Seize, Sealants and Lubricants

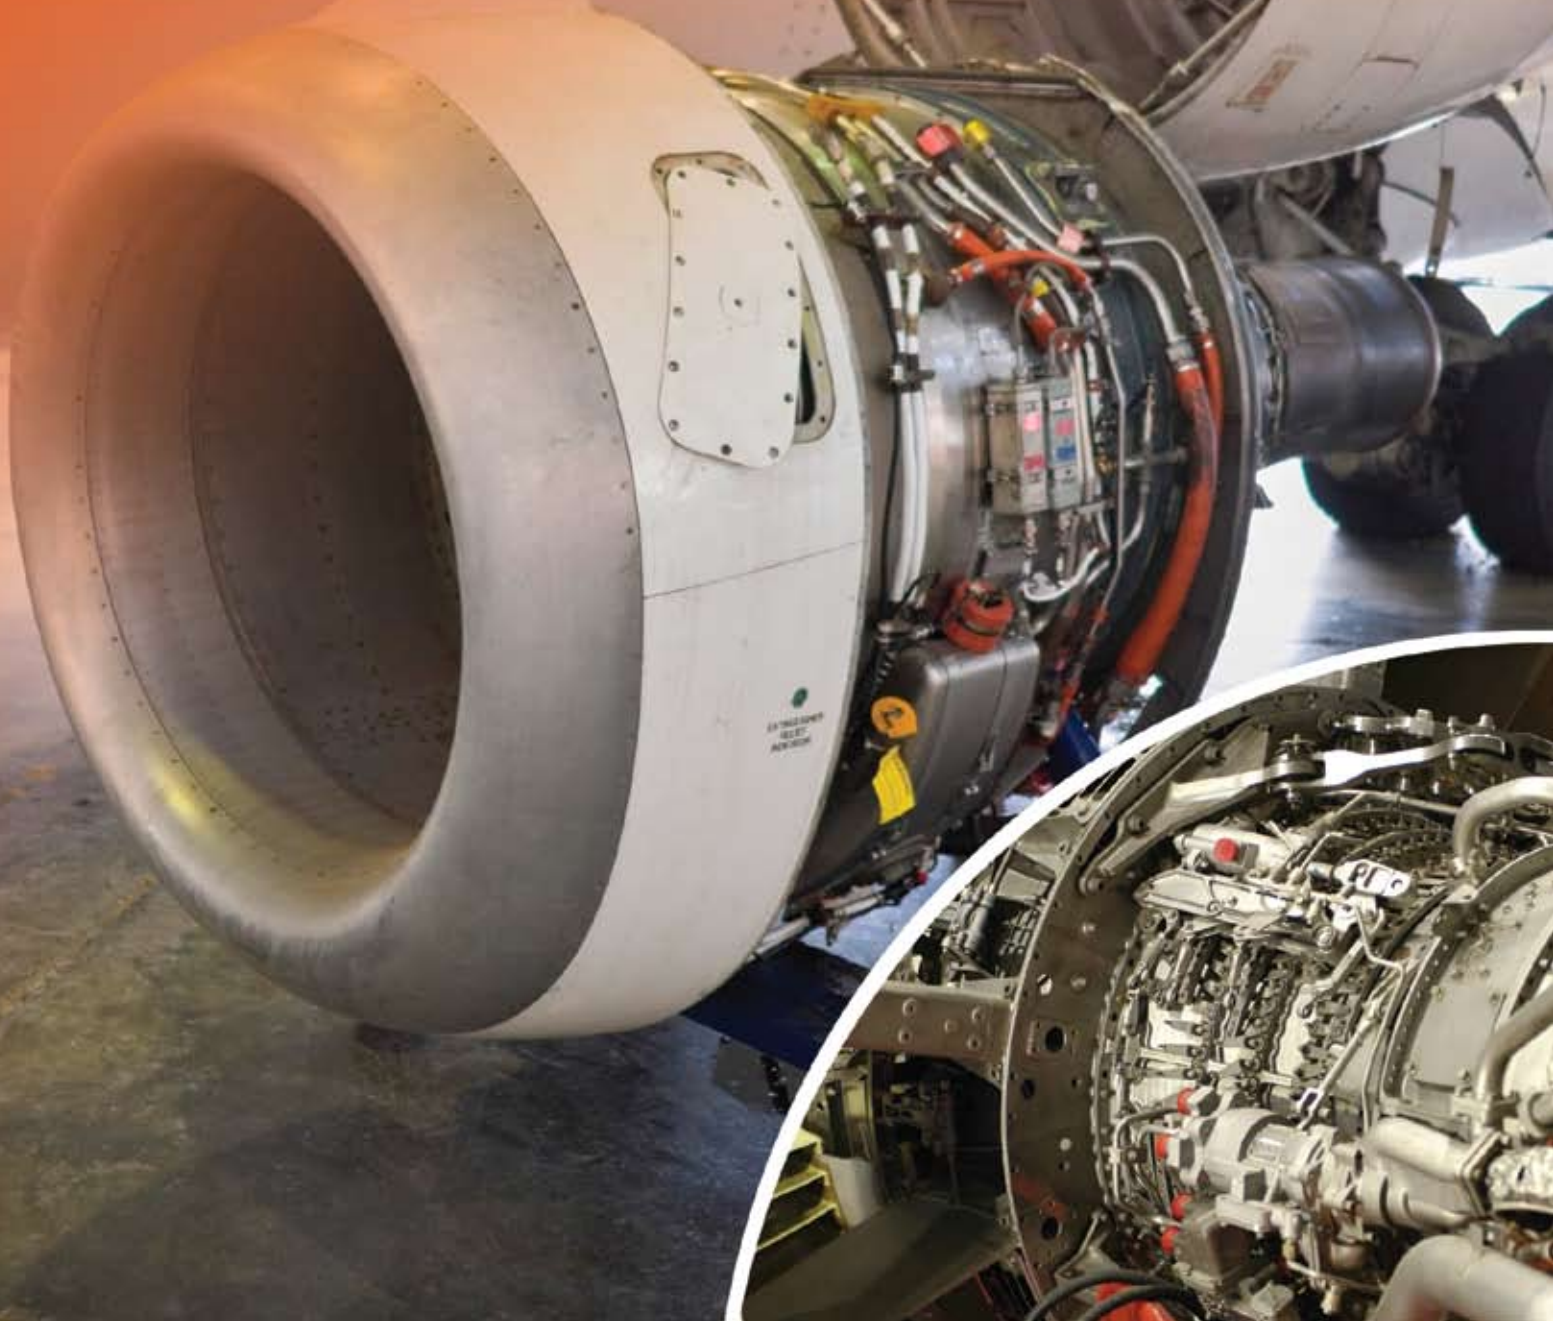



## AEROSPACE

Anti-Seize, Sealants and Lubricants

### Featured Products

**Arctic** - Extreme Service Grease

**Graphite Petrolatum** - Anti-Seize Compound

**JetPump** - Self Priming Hydro-Test Pump

**JL-5000** - Environmentally Safe Water Based Cleaner and Degreaser

**Moly Petrolatum** - Anti-Seize Compound

**MotherCutter WB** - Water Based Biodegradable Cutting Fluid

**PS Terminal** - Electrical Contact Cleaner

**Rust-Guard** - Corrosion Inhibitor

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**SS-30** - High Temperature Anti-Seize Compound

**V-2** - Multi-Purpose PTFE Thread Sealant



## Arctic Extreme Service Grease



**Operating Range** -54°C to 106°C (-65°F to 225°F)

May be used on aircraft, where lubricating properties of a moderate to severe nature are required over a wide range of temperatures. Resist cold without deterioration of the lubricating properties.

SKU #	Size
35050	400 g cartridge
35016	35 lb pail
35029	400 lb drum

## Graphite Petrolatum Anti-Seize for Aircraft Spark Plugs



**Operating Range** -54° to 482°C (-65° to 900°F)

The intended use of this compound is to prevent seizing during assembly or disassembly of aircraft engine spark plugs and threaded fasteners and fittings at temperatures up to 482° C. Particularly suitable for use in contact with austenitic stainless steel, titanium, nickel and cobalt alloys, and similar corrosion resistant metals and alloys. When used, it should be applied to the spark plug threads only. Must not come into contact with the spark plug terminals or electrodes! Meets MIL-T-5544C.

SKU #	Size
27203	500 g plug top

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## JL-5000™ Water Based Cleaner & Degreaser



**Operating Range** 0°C to 100°C (32°F to 212°F)

**The safest and most effective cleaner/degreaser available today!** Can effectively be used for the removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Safe to use on all metal parts and most plastics. *When applying, follow the dilution ratio instructions.* Meets BOEING SPEC D6-17487, Revision J and AMS (Aerospace Material Specification) 1526, Revision B.

SKU #	Size
71043	16 oz trigger spray
71033	1-US gal jug
71035	5-US gal jug
71029	50-US gal drum



## Moly Petrolatum MoS<sub>2</sub> Anti-Seize Compound



**Operating Range** -54°C to 427°C (-65°F to 800°F)

**SKU #**  
26203

**Size**  
1 lb plug top

The intended use of this compound is to prevent seizing during assembly and disassembly of aircraft engine spark plugs and threaded fasteners and fittings at temperatures up to 427°C. The ideal anti-seize compound where parts are engaged with components fabricated from either similar or dissimilar metals.

Meets MIL-T-83483C.

## MotherCutter WB Water Based Biodegradable Cutting Fluid



**Operating Range** -5°C to 85°C (23°F to 185°F)

**SKU #**  
184316  
184320

**Size**  
4 liter jug  
20 liter pail

An Eco-Certified; biodegradable water based cutting fluid designed for a wide range of machine shop applications for both ferrous and non-ferrous metals. Will help to improve your tool life, reduce downtime, reduce HAZMAT disposal costs, and increase your scrap value as it is now "oil free" and ready for pickup. It is the ideal product for light-duty machining and small CNC machines. Recommended at full strength for flooding applications, metalworking involving drilling, sawing, broaching, milling, tapping, threading reaming, drawing, facing, grinding or field machining applications such as pipe cutting and beveling.

## PS Terminal™ Electrical Contact Cleaner



**35 KV dielectric strength**

**SKU #**  
60242

**Size**  
454 g aerosol

To be used for various aerospace applications. When applied, it will penetrate and remove dirt, grease and organic contaminants from electrical and electronic components and equipment. Because of its formula (a blend of HFC solvents) it will not damage the environment or ozone levels. When applied, it evaporates, leaving a residue-free surface. Meets BOEING SPEC D6-17487, Revision H, McDonald Douglas CSD #1 and Lear Jet LAS 1239.

## Rust-Guard™ Corrosion Inhibitor



**Operating Range** -30°C to 138°C (-20°F to 280°F)

**SKU #**  
13241  
13233  
13235  
13229

**Size**  
11 oz aerosol  
1-US gal can  
5-US gal pail  
50-US gal drum

Provides a long-term protection on metal and alloy surfaces from rust and corrosion for a variety of aerospace applications. When applied, it will not crack or flake off and, since it is applied in aerosol or liquid form, it penetrates fully into even the smallest crevices to displace moisture and prevent rust and corrosion.

Meets MIL-PRF-16173E (Grade 1 & 2).



## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



**Operating Range** -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

Meets MIL-S-8660C (Grade 3) and MIL-C-21567A (Grade 2) and NATO Code S-736.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## SS-30™ Pure Copper High Temperature Anti-Seize



**Operating Range** -54°C to 982°C (-65°F to 1800°F)

Provides protection against seizure, galling and heat-freeze. Its high content of copper particles prevents metal-to-metal contact, maintaining lubrication qualities under wide variations of temperature, expansion, contraction, and cyclic pressures and loadings. Considering its temperature range, ideal for use on threaded or flanged connections in internal combustion and jet engines. Conforms to MIL-PRF-907E.

SKU #	Size
12550	400 g cartridge
12502	225 ml brush top
12504	1 liter jar
12505	5 liter jar
12510	10 liter jar
12555	55 liter keg

## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Range** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc., (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases. NSF registered (P1).

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2


### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.





J e t - L u b e o f C a n a d a L t d .

# AGRICULTURE

Anti-Seize, Sealants and Lubricants







# AGRICULTURE

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant and Penetrant

**#202 Moly-Lith** - Premium Multi-Purpose Grease with MoS<sub>2</sub>

**Alco-EP** - Premium Multi-Purpose Grease

**AP-5** - High Temperature Grease with Molybdenum Disulphide

**CB-2** - Super Lithium Multi-Purpose Grease

**Creeper-Lube** - Multi-Purpose Grease

**Gear-Guard** - Paste Open Gear Lubricant

**JetPump** - Two-Stage Hydro-Test Pump

**Kopr-Kote HT** - High Temperature Anti-Seize

**Moly Mist** - MoS<sub>2</sub> Dry Film Lubricant

**No. 33** - Premium Silicone Thickened Lithium Grease

**OG-H** - Open Gear Lubricant

**Petro-Tape** - PTFE Thread Seal Tape

**Renew** - Belt Dressing

**RuFF** - Heavy-Duty Rust and Corrosion Inhibitor

**Silicone Spray** - Industrial Grade Lubricant

**TF-15** - Thread Sealing Compound

**Top-Gun** - Wasp and Hornet Killer

**White Lithium Grease** - All-Purpose Grease with PTFE



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture; prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## #202 Moly-Lith Premium Multi-Purpose Grease with MoS<sub>2</sub>



**Operating Range** -18°C to 150°C (0°F to 300°F)

An all-weather product with exceptional resistance to the effects of water, weathering, oxidation and heavy loads. Gives excellent protection wherever dirt, dust, high humidity, rain and adverse temperatures are critical problems. Can also be used as a general chassis lubrication.

SKU #	Size
33050	14 oz cartridge
33019	35 lb pail
33055	55 liter keg

## Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of other fleet and equipment applications. Provides superior wear protection against extreme pressure and is highly water resistant.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37029	400 lb drum
37055	120 lb keg

## AP-5 High Temperature All-Purpose Grease



**Operating Range** -25°C to 288°C (-13°F to 550°F)

Recommended for use on ball, roller and sleeve bearings, shackles, conveyor chains, sealed assemblies, etc. Provides heavy-duty long-life protection in heavy equipment. When applied, it means that all your mechanical components, which are demanding superior lubrication, will last 2 to 10 times longer than when a regular grease has been applied. Especially recommended for lubrication points prone to neglect.

SKU #	Size
25067	250 ml squeeze tube
25050	400 g cartridge
25004	1 liter jar
25005	5 liter pail
25010	10 liter pail
25055	55 liter keg
25075	205 liter drum

## CB-2 Super Lithium Multi-Purpose Grease



**Operating Range** -18°C to 150°C (0°F to 300°F)

Specifically formulated for use on fast running bearings, anti-friction bearings, journals and all general greasing where a single multipurpose product is desired for economy, simplification of inventory and greasing equipment. Can be used as a chassis grease as well for all mobile machinery.

SKU #	Size
31050	14 oz cartridge
31003	1 lb brush top
31006	5 lb pail
31016	35 lb pail
31029	400 lb drum

## Creep-Lube Multi-Purpose Lubricant



**Operating Range** -32°C to 177°C (-25°F to 350°F)

**SKU #** 88529  
**Size** 400 lb drum

To be used for gear and chain cases, speed reducers and transfer cases, where leakage, noise or wide temperature variations are present. Can also be utilized effectively in cotton spindles, track rolls, trailer landing gears, gang mower drives, etc. Creep-Lube provides good pump-ability, high water resistance, and extreme pressure plus anti-wear properties.

## Gear-Guard Paste Open Gear Lubricant



**Operating Range** -32°C to 175°C (-25°F to 350°F)

**SKU #** 17905  
**Size** 9 lb pail  
17941 12 oz aerosol

To be used on open gears, roller gears, drive chains, fifth wheel of tractors and trucks, etc. Provides maximum lubrication and shock load protection, reduces gear noise, and prevents scoring and welding of gear teeth. Resists heat and pressure, will not wash or wear off because of weather, and will not break down after repeated workings. Is moisture resistant i.e., actually displacing water. The ideal product for fifth wheels of tractors and trucks.

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

**SKU #** JP03  
**Size** 3-US gal  
JP05 5-US gal

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

**SKU #** 10250  
**Size** 400 g cartridge  
10202 225 ml brush top  
10203 450 ml brush top  
10204 1 liter jar

Recommended for use in production and maintenance jobs, where speed in assembling and dismantling is essential. Protects against seizure, heat-freeze, galling, rust and corrosion. Lowers friction, thus reducing wrench torques. Permits re-use of fittings, saving you money on stud, bolt and nut replacement. Is not affected by contraction, expansion or vibration.

## Moly Mist MoS<sub>2</sub> Dry Film Lubricant



**Operating Range** -185°C to 400°C (-300°F to 750°F)

**SKU #** 16041  
**Size** 340 g aerosol  
16015 35 lb pail  
16075 50-US gal drum

To be used wherever a dry lubricant is needed, particularly where temperatures are extreme, where environments are hostile, and where friction must be kept to a minimum. It lowers friction, prevents galling, seizure, stick-slip, fretting, corrosion and metal-to-metal contact. Reduces torque and power consumption. Can be used on chains, gears, or exposed surfaces where a dry lubricant is preferred to prevent a build-up of dirt and corrosion. **NOTE: not for use on oxygen lines.**

## No. 33 Premium Lithium Thickened Silicone Grease



**Operating Range** -57°C to 204°C (-70°F to 400°F)

**SKU #** 73850  
**Size** 14 oz cartridge  
73824 120 lb keg

Excellent for lubrication of ball and roller bearings under light loads, plastic and rubber parts, and small gears and applications requiring oxidation resistant lubrication. Especially effective in equipment that must start in extremely cold conditions.



## OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on applications which require a heavy-duty lubricant, such as exposed gears, steam and power winches, hoists, power shovels, etc. Can also be used wherever high unit pressures occur in slow-moving equipment. When applied, far less lubricant needs to be used versus competitive products, assuring greater economy.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed for sealing metal threaded pipe connections not exceeding 3" for natural gas and methane, gasoline, petroleum oils, propane and butane.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Renew Belt Dressing



**Drying time** 20 minutes

Excellent for use on flat, round and V-style belt drives. Chemically stable, non-drying and water resistant for maximum efficiency. Removes residual build-up and will not glaze or collect dirt and dust. May be applied while belts are in operation.

SKU #	Size
50941	12 oz aerosol

## RuFF Heavy-Duty Rust & Corrosion Inhibitor



**Operating Ranges**

RuFF 21 Bulk	-2°C to 60°C (28°F to 140°F)
RuFF 9 Bulk & Aerosol	-40°C to 60°C (-40°F to 140°F)

Formulated to act as a high performance corrosion inhibitor that tenaciously adheres to all metals. Offers superior protection against water, salt water spray, calcium and chloride, oxidation and other harsh conditions. Ideal for use on construction and farm equipment, trucks, and trailers as a protective undercoating.

SKU #	Size
<b>RuFF 21</b>	
144120	20 liter pail
144175	205 liter drum
<b>RuFF 9</b>	
199120	20 liter pail
199175	205 liter drum
<b>RuFF 9</b>	
199141	340 g aerosol

## TF-15 Thread Sealing Compound



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H<sub>2</sub>S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (except oxygen), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315°C and pressures to 10,000 PSI.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

---

## Top-Gun Wasp & Hornet Killer



**35 KV dielectric strength**

To be used on wasps, hornets, yellow jackets and bees on HVAC equipment and enclosures, cable television equipment, telecommunications equipment, telephone and utility poles, in attics and under eaves, transformers, trees, electrical and water towers. Its trigger nozzle allows fast, accurate, dense jet stream delivery from up to 15 feet for safe application in hard to reach places.

SKU #	Size
51541	350 g aerosol

---

## White Lithium Grease All-Purpose Grease with PTFE



**Operating Range** -18°C to 190°C (0°F to 370°F)

To be used as a premium all-purpose grease that provides superior performance and protection for metal with moving parts, it penetrates and forms a long-lasting protective film to withstand heavy loads and high speeds, prevents rust and corrosion, eliminates squeaks and squeals and will not run or wash away.

SKU #	Size
50350	14 oz cartridge
50341	13 oz aerosol
50305	1 lb can
50316	35 lb pail
50324	120 lb keg



## Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	<b>O</b>	<b>T</b>
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	<b>K</b>		TF-500
<b>A</b>	Ezy-Pak 125	Kiln Grease	<b>P</b>	TFW
Alco EP	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco-EP ECF 	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP 73 Plus	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	<b>U</b>
AP-1 White	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	Ultra
AP-5	Ezy-Turn 5		Powr-Kote	
API-Modified Arctic	Ezy-Turn 6	<b>L</b>	PS Terminal	
API-Modified	Ezy-Turn 8	Lapping Oil		<b>V</b>
Arctic Grease	Ezy-Turn 12	LBX -Special	<b>R</b>	V-2
AX-2	Ezy-Turn 14	Lite Knight	RD-N	
	Ezy-Turn 22		RD-P	<b>W</b>
	Ezy-Turn Body Fill	<b>M</b>	Renew	Well-Guard 
<b>B</b>	Ezy-Turn H <sub>2</sub> S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
<b>C</b>		Marine MP	RuFF 21	WLD
CableLube	<b>F</b>	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	<b>Z</b>
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	<b>G</b>	Moly-Arc	<b>S</b>	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
<b>E</b>			Sheen Free 	
Easy-Clean	<b>J</b>	<b>N</b>	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.








J e t - L u b e o f C a n a d a L t d .

# AUTOMOTIVE

Anti-Seize, Sealants and Lubricants

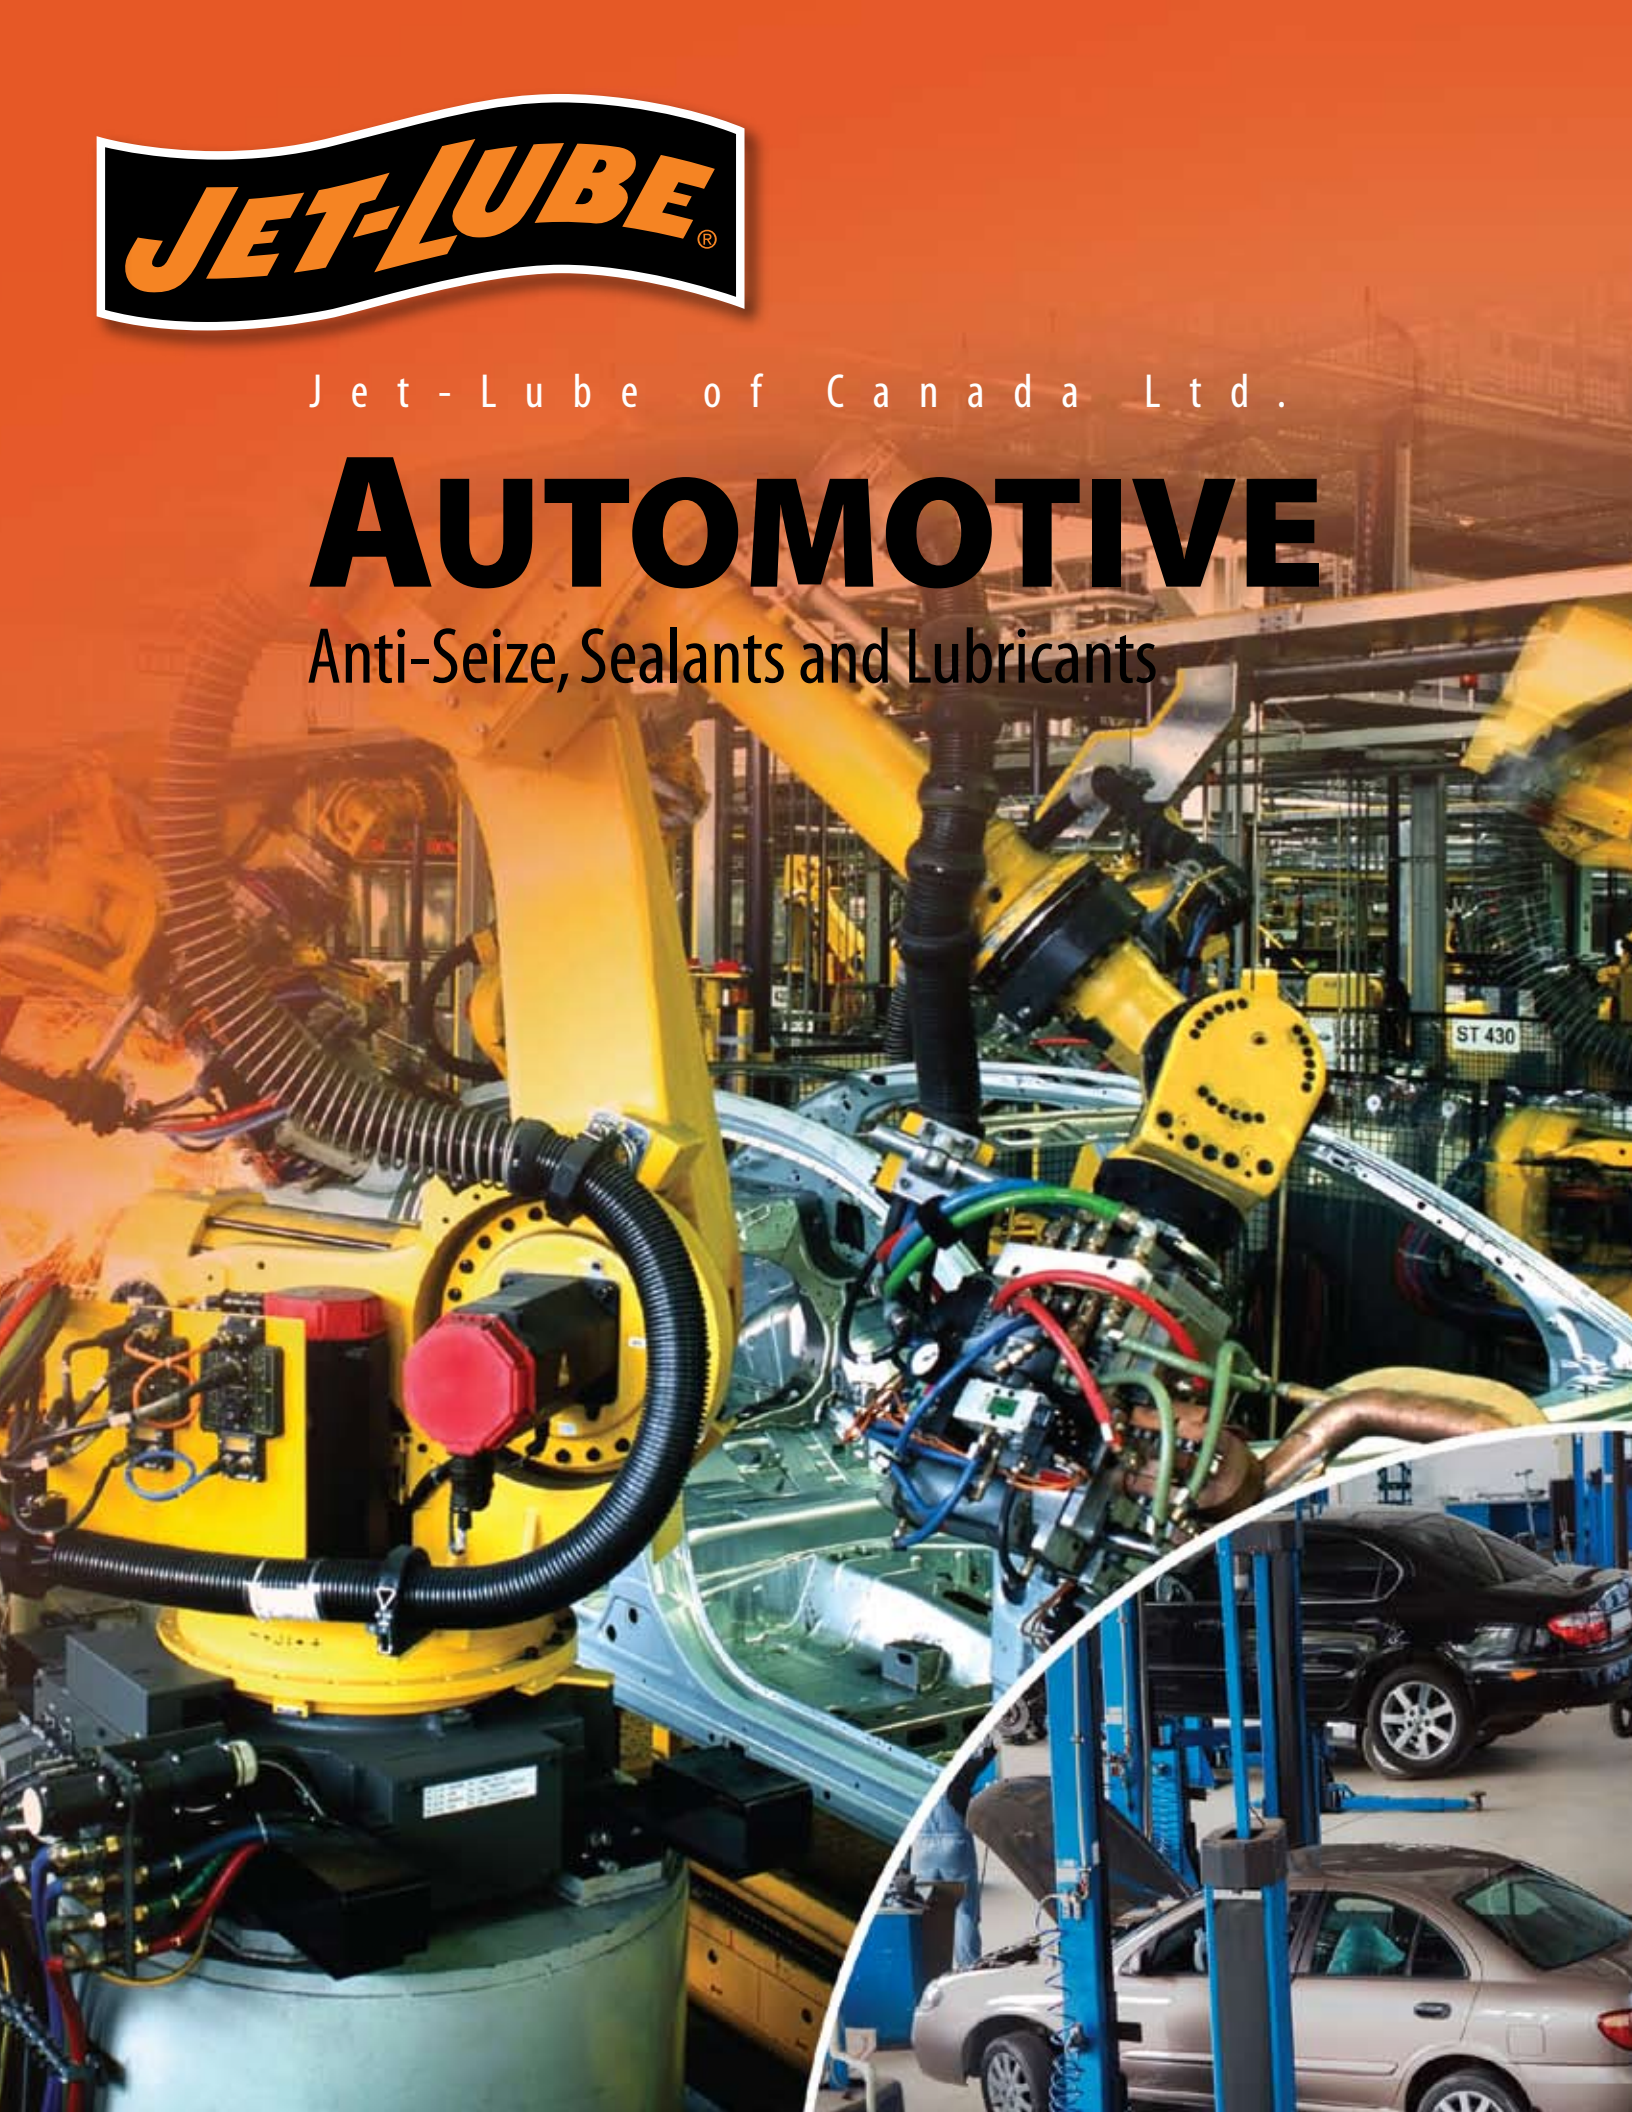





# AUTOMOTIVE

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant and Penetrant

**#202 Moly-Lith** - Premium Multi-Purpose Grease with MoS<sub>2</sub>

**Alco-EP ECF** - Extreme Service Multi-Purpose Grease

**Arctic** - Extreme Service Grease

**CB-2** - Super Lithium Multi-Purpose Grease

**EP Bearing Grease** - Extreme Pressure Multi-Purpose Grease

**JL- 5000** - Environmentally Safe Water Based Cleaner and Degreaser

**Moly Arc** - Winter Grade EP Service Grease

**Moly Mist** - MoS<sub>2</sub> Dry Film Lubricant

**PS Terminal** - Electrical Contact Cleaner

**Renew** - Belt Dressing

**RuFF** - Heavy-Duty Rust and Corrosion Inhibitor

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**White Lithium Grease** - All-Purpose Grease with PTFE



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture; prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## #202 Moly-Lith™ Premium Multi-Purpose Grease



**Operating Range** -18°C to 150°C (0°F to 300°F)

Recommended for use in automotive applications, including all grease fittings where a semi-solid or plastic consistency is normally used. An all-weather product with exceptional resistance to the effects of heat, water, weathering, oxidation and heavy loads. Gives excellent protection wherever dirt, dust, high humidity, rain and adverse temperatures are critical problems. Can also be used as a general chassis lubrication.

SKU #	Size
33050	14 oz cartridge
33019	35 lb pail
33055	55 liter keg

## Alco-EP ECF Extreme Service Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

A premium, biodegradable multi-purpose grease, specially formulated and developed for conditions, where extreme water resistance and protection against salt is required. The ideal product for wheel bearings. Can also be used in areas where tolerances are low and speeds are high.

SKU #	Size
37150	14 oz cartridge



## Arctic Low Temperature Service Grease



**Operating Range** -54°C to 106°C (-65°F to 225°F)

May be used on automobiles where lubricating properties of a moderate to severe nature are required over a wide range of temperatures. Arctic has passed Federal Test Method Standard No. 791B, Method No. 3454.2 "Leakage Tendencies of Automotive Wheel Bearing Greases" plus the salt spray resistance and rust tests for severe environmental contact greases.

SKU #	Size
35050	400 g cartridge
35016	35 lb pail
35029	400 lb drum

## CB-2 Super Lithium Multi-Purpose Grease



**Operating Range** -18°C to 150°C (0°F to 300°F)

Specifically formulated for use on fast running bearings, anti-friction bearings, journals and all general greasing where a single multi-purpose product is desired for economy, simplification of inventory and greasing equipment. Can be used as a chassis grease for automobiles.

SKU #	Size
31050	14 oz cartridge
31003	1 lb brush top
31006	5 lb pail
31016	35 lb pail
31029	400 lb drum

## EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



Operating Range -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings, journals, and is particularly useful where a single, multi-purpose product is desirable. This grease has a multitude of automotive applications, where an exceptionally high quality, multi-purpose lubricant is required.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

## JL-5000™ Water Based Cleaner & Degreaser



Operating Range 0°C to 100°C (32°F to 212°F)

The safest and most effective cleaner/degreaser available today! Can effectively be used for the removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Use is safe on all metal parts and most plastics. When applying, follow the dilution ratio instructions.

SKU #	Size
71043	16 oz trigger spray
71033	1-US gal jug
71035	5-US gal jug
71029	50-US gal drum



## Moly-Arc Winter Grade EP Grease



Operating Range -54°C to 121°C (-65°F to 250°F)

To be used on automobiles, where lubricating properties of a moderate to severe nature are required over a wide range of temperatures. Will resist such environmental contact as humidity, ice and road salts without hardening, washing off or deteriorating. Also available in a summer grade.

SKU #	Size
25255	55 liter keg
25275	205 liter drum

## Moly Mist MoS<sub>2</sub> Dry Film Lubricant



Operating Range -185°C to 400°C (-300°F to 750°F)

To be used wherever a dry lubricant is needed, particularly where temperatures are extreme, where environments are hostile, and where friction must be kept to a minimum. It lowers friction, prevents galling, seizure, stick-slip, fretting, corrosion and metal-to-metal contact. Reduces torque and power consumption. Can be used on chains, gears, or exposed surfaces where a dry lubricant is preferred to prevent a build-up of dirt and corrosion. **NOTE: not for use on oxygen lines.**

SKU #	Size
16041	340 g aerosol
16015	35 lb pail
16075	50-US gal drum

## PS Terminal™ Electrical Contact Cleaner



35 KV dielectric strength

To be used for various automotive applications. When applied, it will penetrate and remove dirt, grease and organic contaminants from electrical and electronic components and equipment. Because of its formula (a blend of HFC solvents) it will not damage the environment or ozone levels. When applied, it evaporates, leaving a residue-free surface.

SKU #	Size
60242	454 g aerosol



## Renew Belt Dressing



Drying time 20 minutes

Excellent for use on flat, round and "V"-style power transmission belts and fan belts. Chemically stable, non-drying and water resistant for maximum efficiency. Removes residual build-up and will not glaze or collect dirt and dust.

SKU #	Size
50941	12 oz aerosol

## RuFF Heavy-Duty Rust & Corrosion Inhibitor



### Operating Ranges

RuFF 21 Bulk	-2°C to 60°C (28°F to 140°F)
RuFF 9 Bulk & Aerosol	-40°C to 60°C (-40°F to 140°F)

Formulated to act as a high performance corrosion inhibitor that tenaciously adheres to all metals. Offers superior protection against water, salt water spray, calcium and chloride, oxidation and other harsh conditions. Ideal for use on automobiles, trucks, and trailers as a protective undercoating.

SKU #	Size
RuFF 21	
144120	20 liter pail
144175	205 liter drum

RuFF 9	
199120	20 liter pail
199175	205 liter drum

RuFF 9	
199141	340 g aerosol

## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



Operating Range -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml plug-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



Operating Range -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## White Lithium Grease All-Purpose Grease with PTFE



Operating Range -18°C to 190°C (0°F to 370°F)

To be used as a premium all-purpose grease that provides superior performance and protection of moving metal parts. It penetrates and forms a long-lasting protective film to withstand heavy loads and high speeds, prevents rust and corrosion, eliminates squeaks and squeals and will not run or wash away.

SKU #	Size
50350	14 oz cartridge
50341	13 oz aerosol
50305	1 lb can
50316	35 lb pail
50324	120 lb keg

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff

### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)

Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.








J e t - L u b e   o f   C a n a d a   L t d .

# CONSTRUCTION

Anti-Seize, Sealants and Lubricants

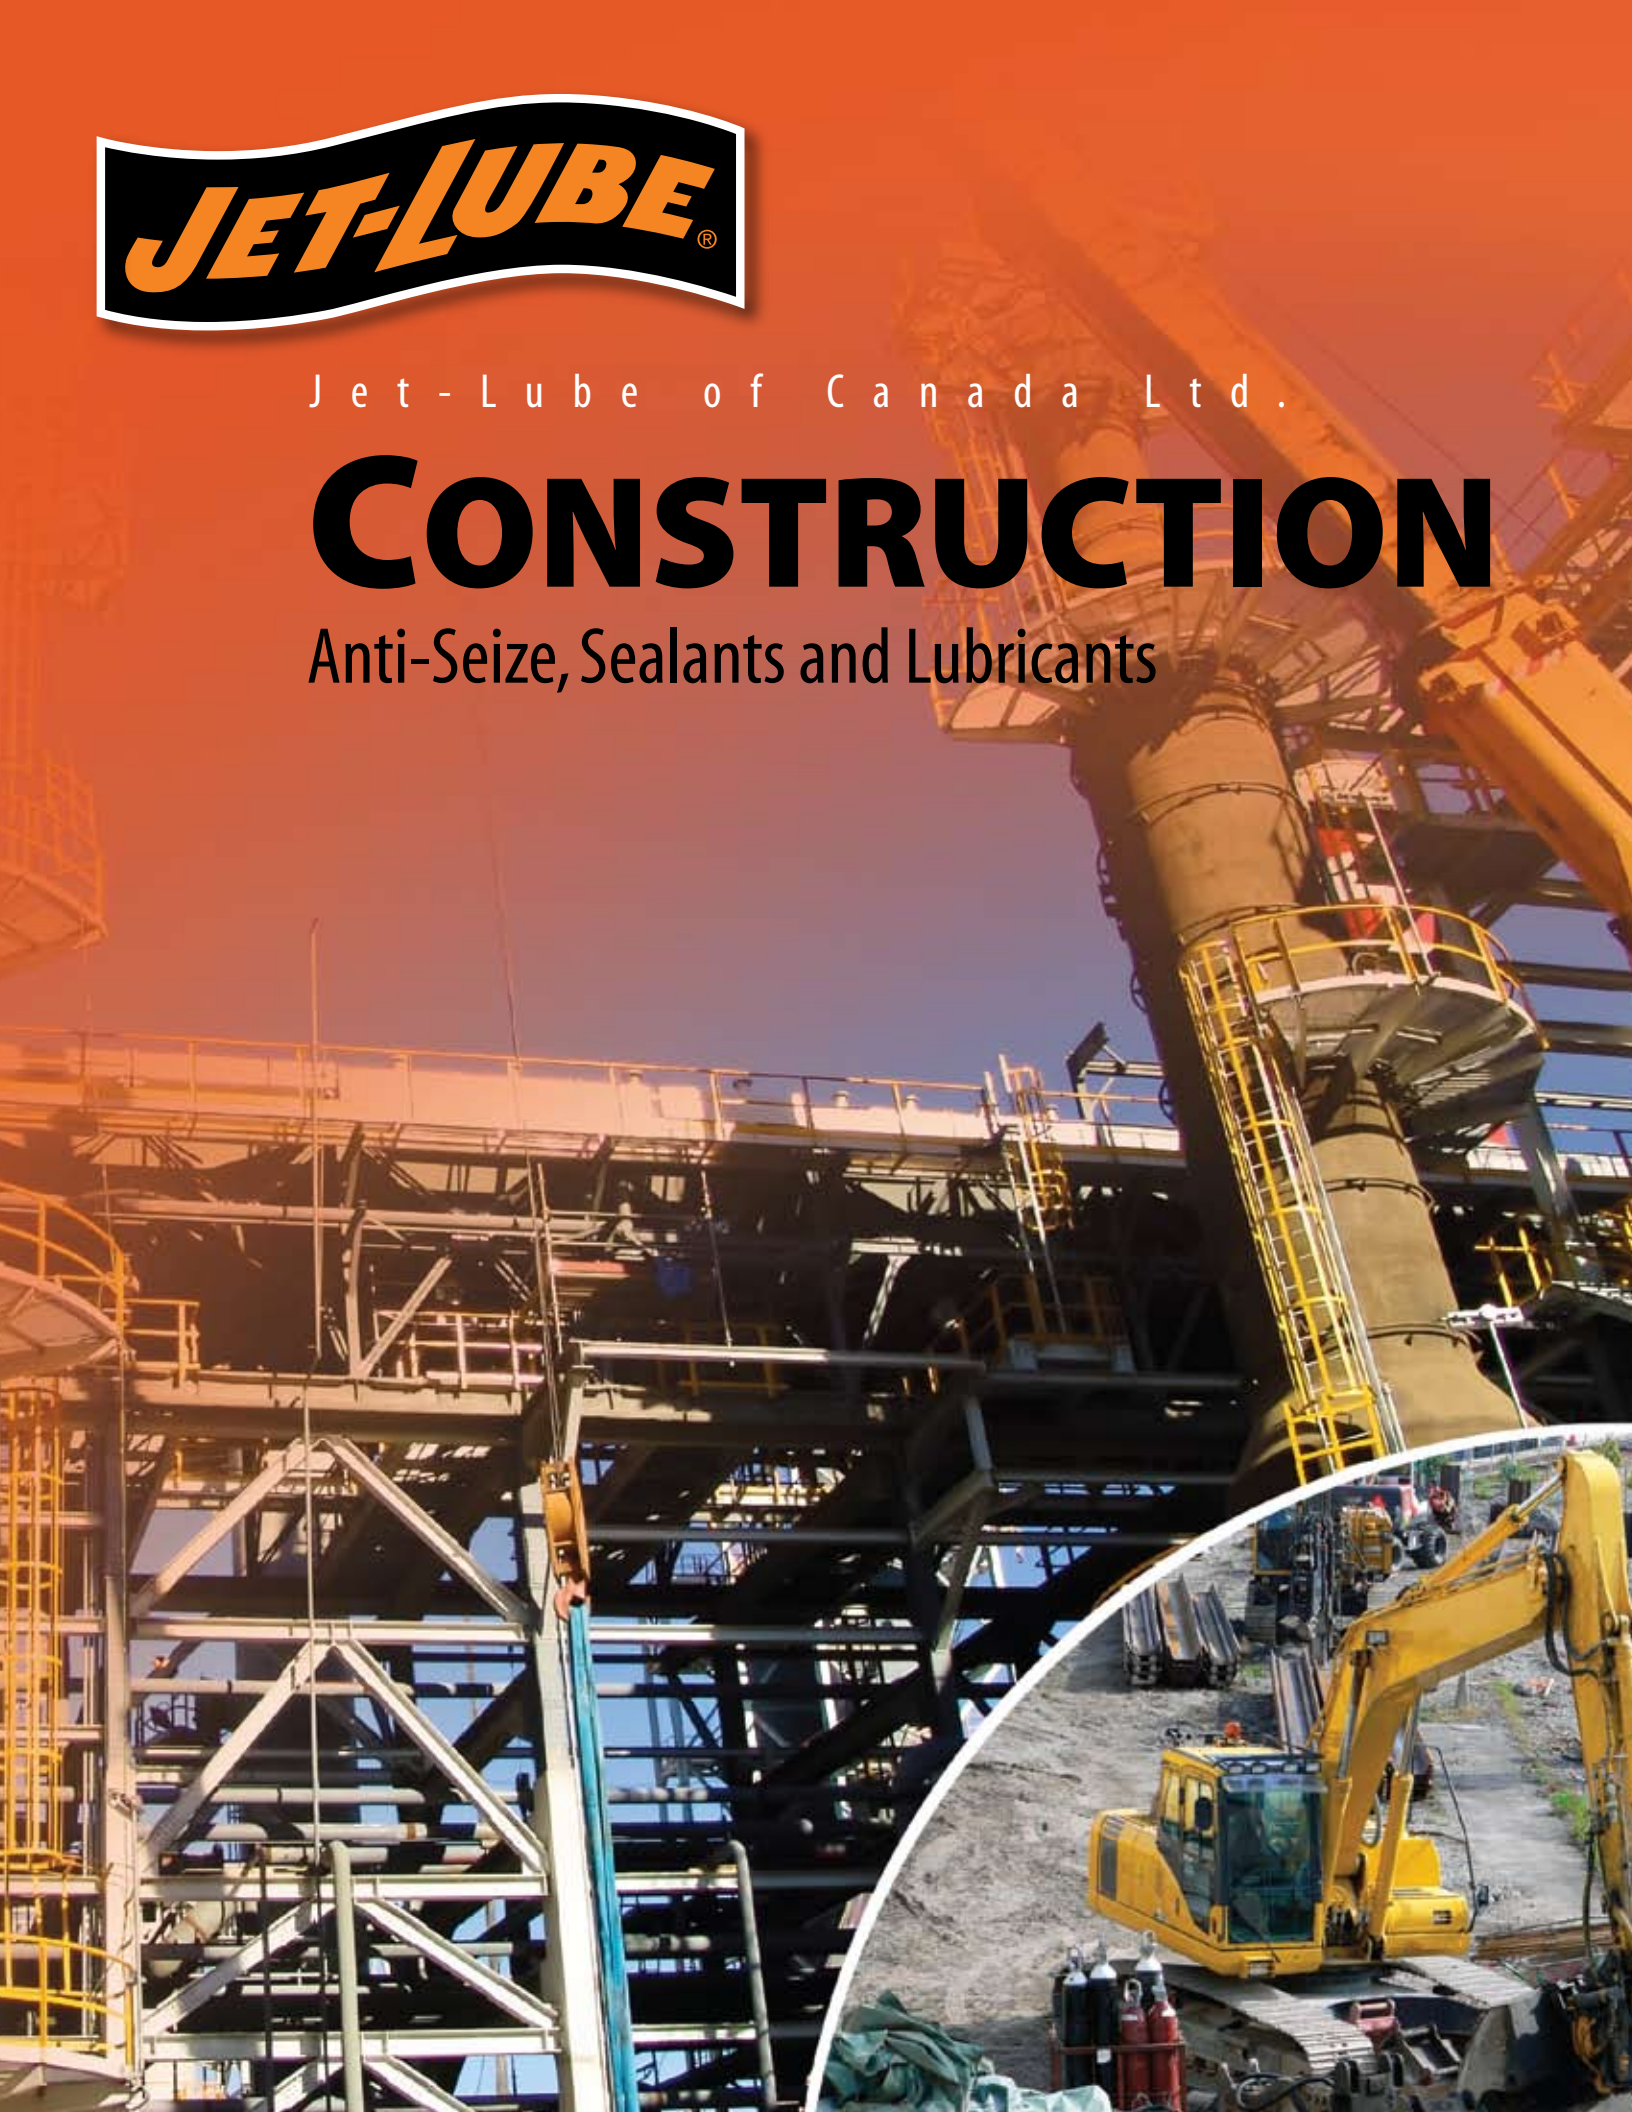





# CONSTRUCTION

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant and Penetrant

**Alco-EP** - Premium Multi-Purpose Grease

**Cable-Lube** - Wire Rope and Chain Lubricant

**EP Bearing Grease** - Extreme Pressure Multi-Purpose Grease

**Jet-Plex EP** - Multi-Purpose Grease

**JetPump** - Two-Stage Test and Injection Pump

**Kopr-Kote HT** - High Temperature Anti-Seize

**MP-50** - Low Friction Moly Paste

**Petro-Tape** - PTFE Thread Seal Tape

**Rust-Guard** - Corrosion Inhibitor

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**Silver Plus Regular** - Metallic Anti-Seize

**V-2** - Multi-Purpose PTFE Thread Sealant



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture, prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of other fleet and equipment applications. Provides superior wear protection against extreme pressure and is highly water resistant.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37029	400 lb drum
37055	120 lb keg

## CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

Today's no. 1 wire rope lubricant and penetrant. When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

## EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



**Operating Range** -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial usage. Will lower maintenance costs and simplify inventory, while providing excellent all-around-performance. Has a multitude of applications in construction where an exceptionally high quality lubricant is required.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

## Jet-Plex EP™ Multi-Purpose Grease



**Operating Range** -18° to 260°C (0°F to 500°F)

Recommended for all types of bearing and sliding applications, for shock-loading, pounding, rough usage and high loads. The ideal multi-purpose grease for use in extreme pressure and high temperature operating conditions. Excellent resistance to water and water washout problems. Even under extreme pressures, oil separation is minimal.

SKU #	Size
31750	14 oz cartridge
31706	5 lb pail
31719	5-US gal pail
31724	120 lb keg

## JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kopr-Kote HT High Temperature Anti-Seize



Operating Range -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs, is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. Has no equal in temperature services up to 815° C (1500° F). **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

## MP-50™ Low Friction Moly Paste



Operating Range -25°C to 400°C (-13°F to 750°F)

A product with a multitude of uses. It protects production tools and taps, prevents seizure and freezing of bolts and studs, it reduces torque on makeup and dismantling of any threaded or screwed fitting. Used extensively for lubricating bushings and guideposts on die sets. Also used on assembly and disassembly of press and shrink fits of pins, shafts, bushings, sprockets, gears and bearings. Eliminates galling and distortion. May be applied directly to hot surfaces without running off or dripping.

SKU #	Size
28002	225 ml brush top
28004	1 liter jar
28005	5 liter pail
28010	10 liter pail
28050	400 g cartridge

## Petro-Tape PTFE Thread Seal Tape



Operating Range -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC listed for sealing metal threaded pipe connections not exceeding 3".

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Rust-Guard™ Corrosion Inhibitor



Operating Range -30°C to 138°C (-20°F to 280°F)

Provides a long-term protection on all metal and alloy surfaces from rust and corrosion for a variety of industrial applications. When applied, it will not crack or flake off and, since it is applied in aerosol or liquid form, it penetrates fully into even the smallest crevices to displace moisture and prevent rust and corrosion.

SKU #	Size
13241	11 oz aerosol
13233	1-US gal can
13235	5-US gal pail
13229	50-US gal drum



## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



**Operating Range** -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## Silver Plus Regular Metallic Anti-Seize



**Operating Range** -129°C to 982°C (-65°F to 1800°F)

Excellent for use on bolts, nuts, gaskets, pipe fittings, guides and slides, valve assemblies, press fits, cylinder heads, chain drives, pump mountings, forging dies, manway studs, exhaust manifold studs, etc. It is the anti-seize of choice for components made of aluminum and its alloys.

SKU #	Size
69902	225 ml brush top
69903	450 ml brush top

## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Ranges** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc. (specifications of all mediums available upon request). Pressures to 10,000 PSI for liquids and 2,000 PSI for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.








J e t - L u b e o f C a n a d a L t d .

# ELECTRIC UTILITIES

Anti-Seize, Sealants and Lubricants

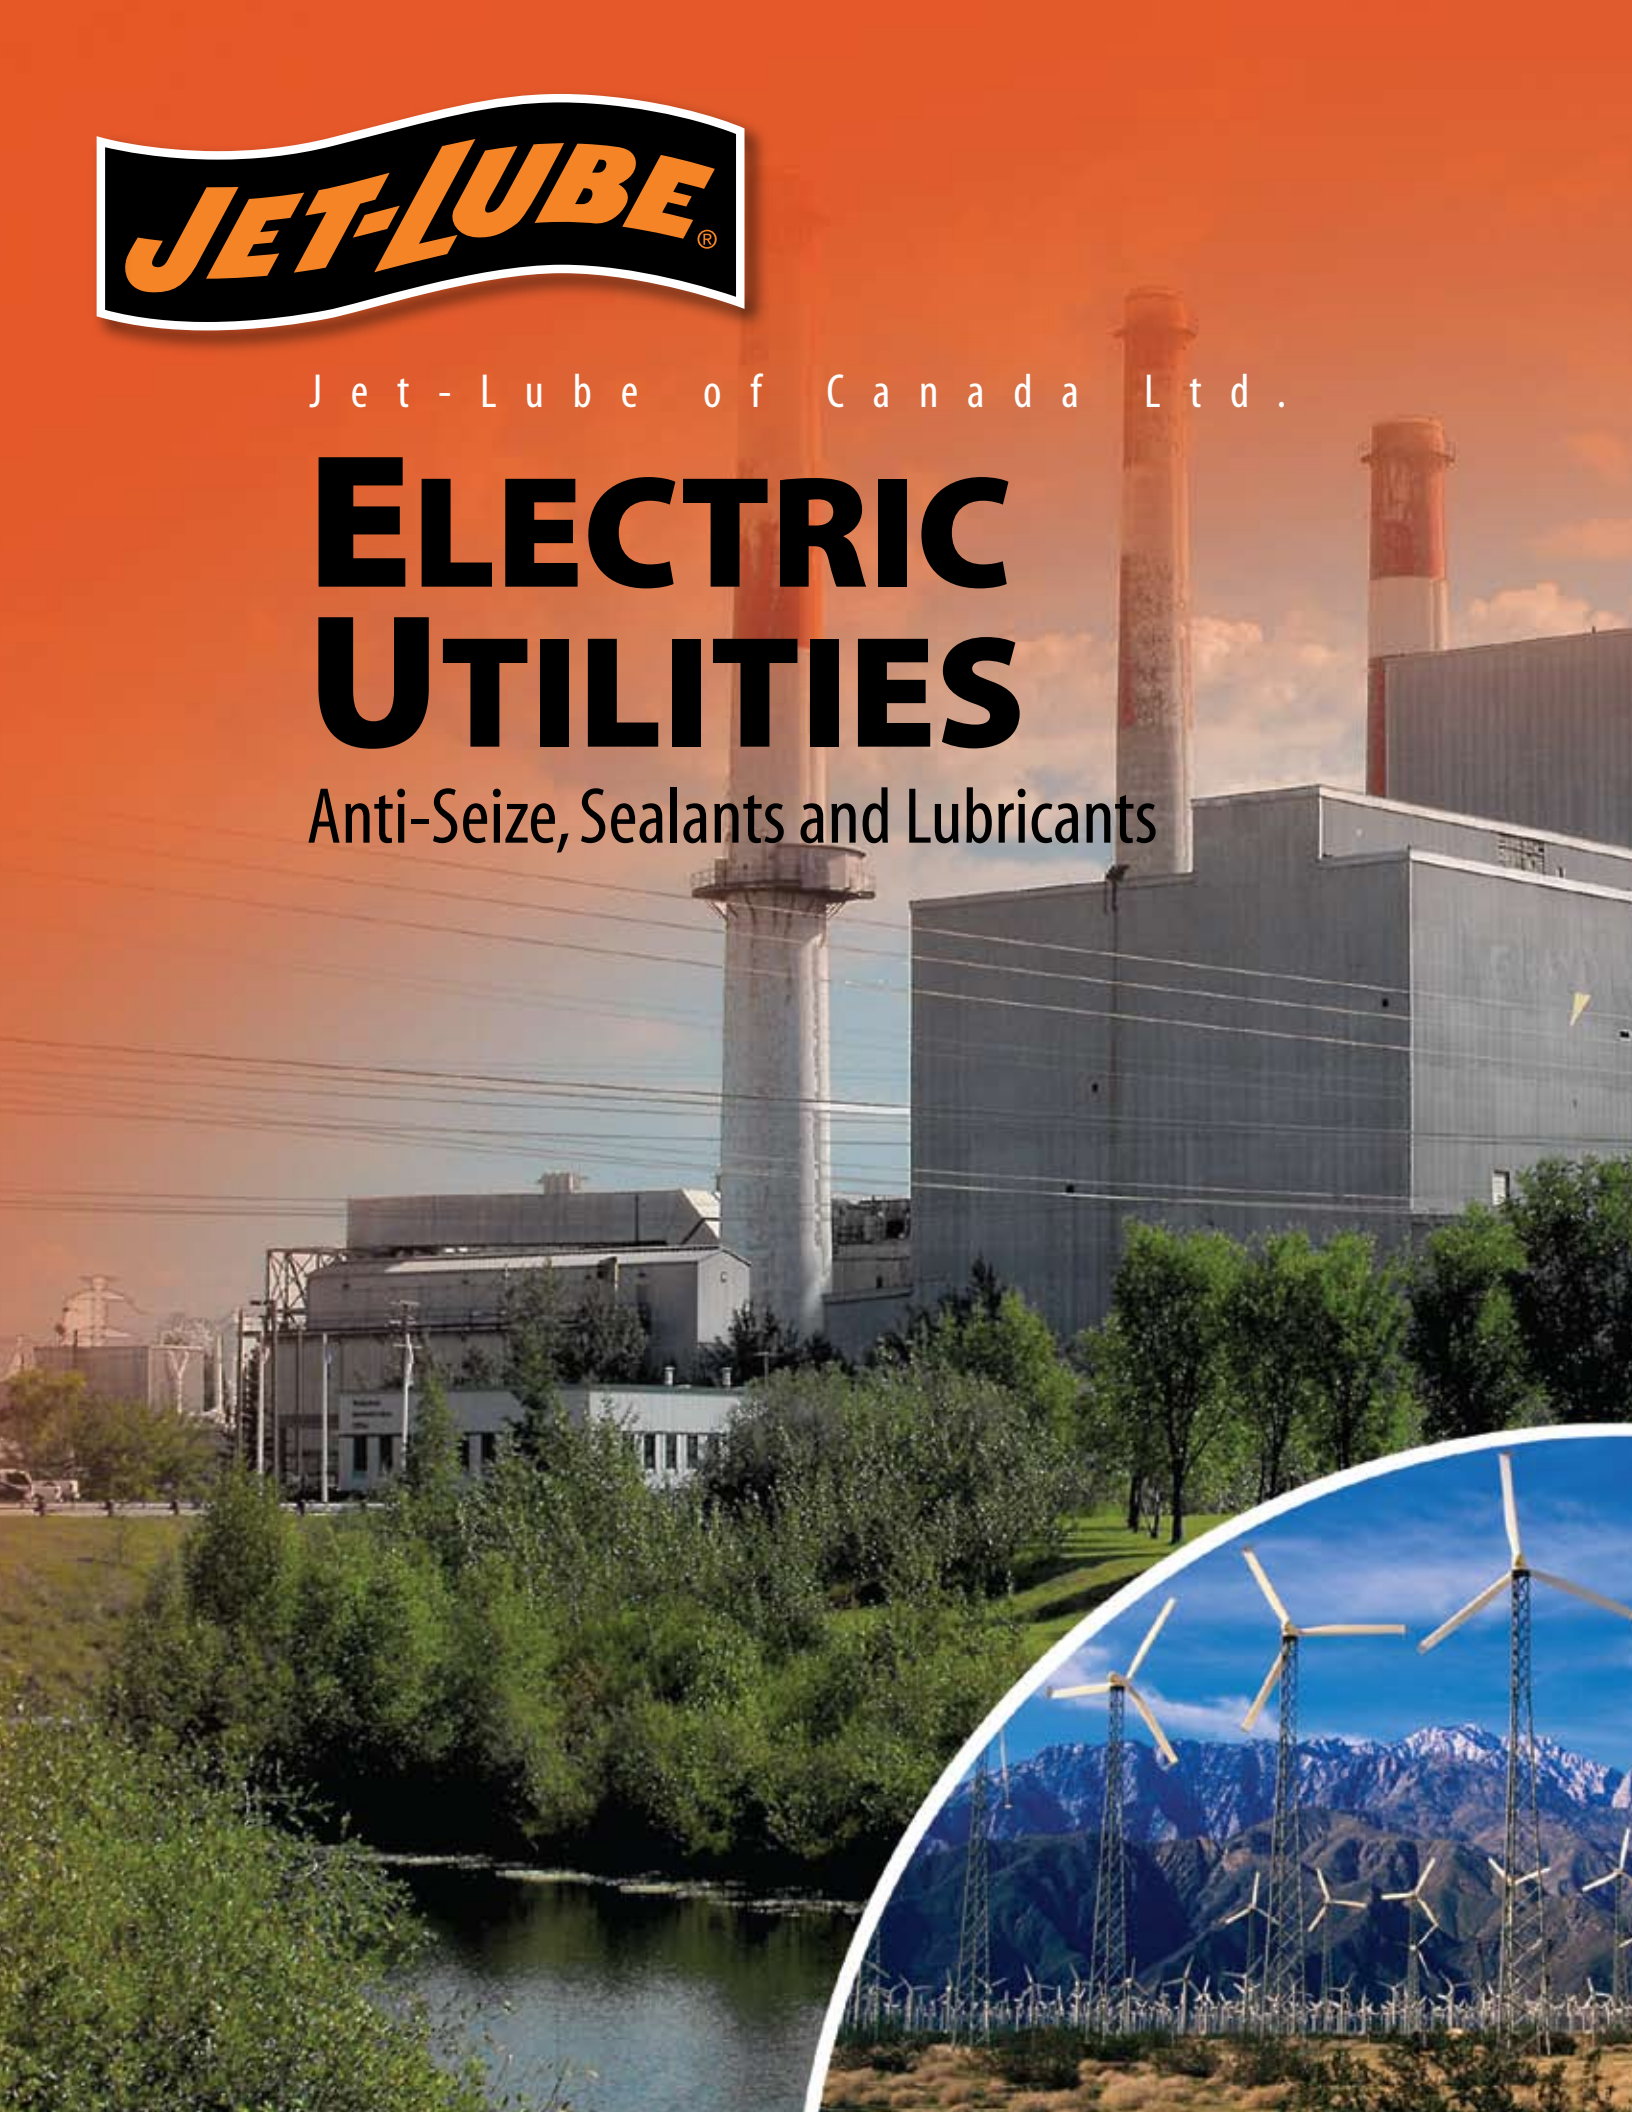





# ELECTRIC UTILITIES

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant and Penetrant

**Alco-EP** - Premium Multi-Purpose Grease

**AP-5** - High Temperature Grease with Molybdenum Disulphide

**CB-2** - Super Lithium Multi-Purpose Grease

**EP Bearing Grease** - Extreme Pressure Multi-Purpose Grease

**Gear-Guard** - Paste Open Gear Lubricant

**Jet-Lok TL-72** - High Temperature Thread Locker

**Jet-Plex EP** - Lithium Complex Multi-Purpose Grease

**JetPump** - Self Priming Hydro-Testing Pump

**MP-50** - Low Friction Moly Paste

**No. 33** - Premium Silicone Thickened Lithium Grease

**OG-H** - Open Gear Lubricant

**Renew** - Belt Dressing

**Silicone Spray** - Industrial Grade Lubricant

**Temp-Guard** - Synthetic High Temperature Grease



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability'. Removes moisture, prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, U-joints, pivot pins and a wide range of industrial applications. Provides superior wear protection against extreme pressure and is highly water resistant. Has a 60 pound rating in the TIMKEN load test, which indicates that it has an excellent load-carrying ability.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37029	400 lb drum
37055	120 lb keg

## AP-5 High Temperature All-Purpose Grease



**Operating Range** -25°C to 288°C (-13°F to 550°F)

Recommended for use on ball, roller and sleeve bearings, shackles, conveyor chains, sealed assemblies, etc. Provides heavy-duty long-life protection in heavy equipment. When applied, it means that all your mechanical components, which are demanding superior lubrication, will last 2 to 10 times longer than when a regular grease has been applied. Especially recommended for lubrication points prone to neglect.

SKU #	Size
25067	250 ml squeeze tube
25050	400 g cartridge
25004	1 liter jar
25005	5 liter pail
25010	10 liter pail
25055	55 liter keg
25075	205 liter drum

## CB-2 Super Lithium Multi-Purpose Grease



**Operating Range** -18°C to 150°C (0°F to 300°F)

Specifically formulated for use on fast running bearings, anti-friction bearings, journals and all general greasing where a single, multi-purpose product is desired for economy, simplification of inventory and greasing equipment. Exceptional resistance against the effects of heat, water, oxidation and heavy loadings. Offers protection wherever dirt, dust, high humidity, rain and adverse temperatures are critical problems.

SKU #	Size
31050	14 oz cartridge
31003	1 lb brush top
31006	5 lb pail
31016	35 lb pail
31029	400 lb drum

## EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



**Operating Range** -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial usage. Will lower maintenance costs and simplify inventory, while providing excellent all-around-performance. Has a multitude of applications in areas where an exceptionally high quality lubricant is required.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

## Gear-Guard Paste Open Gear Lubricant



**Operating Range** -32°C to 175°C (-25°F to 350°F)

Specifically formulated for use on open gears. Provides maximum lubrication and shock-load protection, reduces gear noise, lubricates, prevents scoring and welding of gear teeth. Resists heat and pressure, will not wash or wear off because of weather and will not break down after repeated workings.

SKU #	Size
17905	9 lb pail
17941	12 oz aerosol

## Jet-Lok® TL-72 High-Temperature Thread Locking Compound



**Operating Range** -55°C to 204°C (-65°F to 400°F)

To be used for high-temperature locking and sealing of studs, nuts, screws, bolts and fittings against leakage, contamination and corrosion. Recommended for parts that do not require routine maintenance. More suitable for larger diameter, coarse threaded parts, because of its viscosity.

SKU #	Size
55566	50 ml tube
55565	225 ml tube

## Jet-Plex EP™ Multi-Purpose Grease



**Operating Range** -18° to 260°C (0°F to 500°F)

Recommended for use on all types of bearings and sliding applications, for shock-loading, pounding and high loads. Is the ideal multi-purpose grease for use in extreme pressure and high temperature operating conditions. Contains excellent resistance to water and water washout problems. Oil separation is minimal, even under extreme pressure.

SKU #	Size
31750	14 oz cartridge
31706	5 lb pail
31719	5-US gal pail
31724	120 lb keg

## MP-50™ Low Friction Moly Paste



**Operating Range** -25°C to 400°C (-13°F to 750°F)

A product with a multitude of uses. It protects production tools and taps, prevents seizure and freezing of bolts and studs. It reduces torque on makeup and dismantling of any threaded or screwed fitting, used extensively for lubricating bushings and guideposts on die sets. Also used on assembly and disassembly of press and shrink fits of pins, shafts, bushings, sprockets, gears and bearings. Eliminates galling and distortion. May be applied directly to hot surfaces without running off or dripping.

SKU #	Size
28002	225 ml brush top
28004	1 liter jar
28005	5 liter pail
28010	10 liter pail
28050	400 g cartridge

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal



### No. 33 Premium Lithium Thickened Silicone Grease



**Operating Range** -57°C to 204°C (-70°F to 400°F)

Excellent for lubrication of ball and roller bearings under light loads, plastic and rubber parts, and small gears and applications requiring oxidation resistant lubrication. Especially effective in equipment that must start in extremely cold conditions.

SKU #	Size
73850	14 oz cartridge
73824	120 lb keg

### OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on applications which require a heavy-duty lubricant, such as exposed gears, steam and power winches, hoists, power shovels, etc. Can also be used wherever high unit pressures occur in slow-moving equipment. When applied, far less lubricant needs to be used versus competitive products, assuring greater economy.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

### Renew Belt Dressing



**Drying time** 20 minutes

Excellent for use on flat, round and V-style belt drives. Chemically stable, non-drying and water resistant for maximum efficiency. Removes residual build-up and will not glaze or collect dirt and dust. May be applied while belts are in operation.

SKU #	Size
50941	12 oz aerosol

### Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

### Temp-Guard™ Synthetic High Temperature Grease



**Operating Range** -22°C to 315°C (-10°F to 600°F)

Specifically developed for high temperature applications. Can be used in plain bearings, anti-friction bearings, ball bearings, roller bearings, kiln bearings, crushers, crane ladles, high temperature blowers, fans and conveyors. Contains both graphite and molybdenum disulphide, which gives Temp-Guard both low friction and extreme pressure capabilities

SKU #	Size
31850	14 oz cartridge
31806	5 lb pail
31816	35 lb pail

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.





J e t - L u b e o f C a n a d a L t d .

# FOOD GRADE

Anti-Seize, Sealants and Lubricants





## FOOD GRADE

Anti-Seize, Sealants and Lubricants

### Featured Products

**Arctic** - Low Temperature Service Grease

**CC-Lube** - Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant

**Clean-Up Plus** - Organic Solvent Cleaner/Degreaser

**EMS** - Water Based Food Grade Silicone

**FMG** - Food Machinery Grease

**Food Grade Silicone**

**JL-5000** - Environmentally Safe Water Based Cleaner & Degreaser

**Magic Wrench** - Super Penetrant

**Oven Chain Lube** - Non-Melting Lubricant

**Renew** - Belt Dressing

**V-2** - Multi-Purpose PTFE Thread Sealant

**White Knight** - Food Grade Anti-Seize

**White Lithium** - All-Purpose Grease with PTFE



Qualifying products will  
bear the thumbprint.

For a complete listing of our products visit: [www.jetlubecanada.com](http://www.jetlubecanada.com)



## Arctic Low Temperature Service Grease



**Operating Range** -54°C to 106°C (-65°F to 225°F)

Particularly suitable for use in extreme cold environments, such as cold rooms, cold storage lockers, ice plants and on refrigeration or cold storage equipment.

SKU #	Size
35050	400 g cartridge
35016	35 lb pail
35029	400 lb drum

## CC-Lube™ Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant



**Operating Range** -18°C to 204°C (0°F to 400°F)

A clean, clear, colorless, non-staining, non-drying and biodegradable lubricant, that may be safely used on a variety of surfaces, including metal, plastic, rubber, vinyl, nylon and stainless steel in a multitude of food processing applications. Unsurpassed in reducing friction, extends machine and equipment life and prevents the formation of rust and corrosion over a broad temperature range. CFIA approved and NSF (H-1) authorized for use in federally inspected meat and poultry plants.

SKU #	Size
70550	14 oz cartridge
70623	1-US gal pail
70516	35 lb pail
70524	120 lb keg
70529	400 lb drum



## Clean-Up Plus™ Organic Solvent Cleaner & Degreaser



**29 KV dielectric strength**

Specially formulated and designed to quickly dissolve and rinse away dirt, grease, grime, oil, tar and wax, while being both environmentally safe and ozone friendly. Ideal for a wide range of food production cleaning applications. Safe on all metals and most plastics. NSF registered (C1)

SKU #	Size
72542	15 oz aerosol
72535	5-US gal pail

## EMS™ Water Based Food Grade Silicone



**Operating Range** 1°C to 260°C (34°F to 500°F)

Recommended for use in food processing plants on conveyors, guides, roller chains, bakery equipment, racks, cookers, and in bottling and packaging applications. When applied, it stops sticking, squeaking and binding of moving parts. Provides a long-wearing, moisture resistant, non-toxic film that will not melt or become rancid. CFIA listed for use in federally inspected meat and poultry plants.

SKU #	Size
52543	16 oz trigger spray
52533	1-US gal jug
52535	5-US gal jug



## FMG™ Food Machine Grease



**Operating Range** -18°C to 204°C (0°F to 400°F)

Formulated to perform in a wide variety of operating conditions. In food processing machinery, it is recommended for the lubrication of roller, needle, ball, journal and slide bearings. May have incidental contact with food items. CFIA approved and NSF registered (H1).

SKU #	Size
30150	14 oz cartridge
30106	5 lb pail
30116	35 lb pail
30129	400 lb drum



## Food Grade Silicone



**Operating Range** -17°C to 177°C (0°F to 350°F)

Excellent for use on processing in all types of food and food related industries, where incidental food contact may occur. Can be used on chutes, guides, conveyors, bottling machinery, slicers, ovens, freezers, knives, saws, etc. CFIA approved for use in federally inspected meat and poultry plants. NSF registered (H1).

**SKU #** 50641 **Size** 325 g aerosol



## JL-5000™ Water Based Cleaner & Degreaser



**Operating Range** 0°C to 100°C (32°F to 212°F)

**The safest and most effective cleaner/degreaser available today!** To be used on food processing machinery for an effective removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Safe for use on all metal parts and most plastics. When applying, follow the dilution ratio instructions. CFIA approved and NSF registered (A1, B2, C1).

**SKU #** 71043 **Size** 16 oz trigger spray  
71033 1-US gal jug  
71035 5-US gal jug  
71029 50-US gal drum



## Magic Wrench® Super Penetrant



**Operating Range** -51°C to 177°C (-60°F to 350°F)

A premium, synthetic product that may be used as a light machine oil, penetrating oil or rust preventive. Excellent for use on equipment and machine items, such as chains, linkages, cams and slides, stirrups on bottle-filling machines, valves, pins, hinges, cables, etc. Is also an ideal product for the lubrication and conditioning of air tools. CFIA approved and NSF registered (H1).

**SKU #** 39541 **Size** 13 oz aerosol  
39533 1-US gal jug  
39535 5-US gal jug



## Oven Chain Lubricant



**Operating Range** -32°C to 400°C (-25°F to 750°F)

**State-of-the-art answer to oven chain lubrication!** Derived from a carefully evolved blend of high viscosity, non-smoking, low odor synthetic fluids and surface tension modifiers. These additives lower the surface tension of the high viscosity fluids allowing them to move effectively to penetrate into the links and pins of the chains, to provide optimum performance, while operating at elevated temperatures. NSF registered (H1).

**SKU #** 33216 **Size** 35 lb pail  
33224 120 lb keg  
33229 400 lb drum



## Renew Belt Dressing



**Drying time** 20 minutes

Excellent for use on flat, round and V-style conveyor belts. Chemically stable, non-drying and water resistant for maximum efficiency. Removes residual build-up and will not glaze or collect dirt and dust. May be applied while belts are in operation. USDA authorized for use in federally inspected meat and poultry plants. NSF registered (P1).

**SKU #** 50941 **Size** 12 oz aerosol



## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Range** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc., (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases. NSF registered (P1).

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## White Knight™ Food Grade Anti-Seize Compound



**Operating Range** -54°C to 982°C (-65°F to 1800°F)

A premium quality anti-seize compound, specifically developed for use in applications where incidental food contact is possible. Protects metal parts from seizure, galling, rust, corrosion and heat freeze. Can be used in various applications, such as bottling machinery, packaging machinery, valve assemblies, stainless steel fitting, worm gears, etc. CFIA approved for use in federally inspected meat and poultry plants and NSF registered (H1).

SKU #	Size
16402	1/2 lb brush top
16404	1 lb brush top
16423	1-US gal pail



## White Lithium Grease All-Purpose Grease with PTFE



**Operating Range** -18°C to 190°C (0°F to 370°F)

A premium all-purpose grease that provides superior performance and protection for metal-to-metal (moving) parts; it penetrates and forms a long-lasting protective film to withstand heavy loads and high speeds; prevents rust and corrosion, eliminates squeaks and squeals and will not run or wash away. To be applied in areas without direct food contact. CFIA approved for use in federally inspected meat and poultry plants and NSF registered (H2).

SKU #	Size
50350	14 oz cartridge
50341	13 oz aerosol
50305	1 lb can
50316	35 lb pail
50324	120 lb keg

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G

Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O


OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.








J e t - L u b e o f C a n a d a L t d .

# FORESTRY - PULP & PAPER

Anti-Seize, Sealants and Lubricants

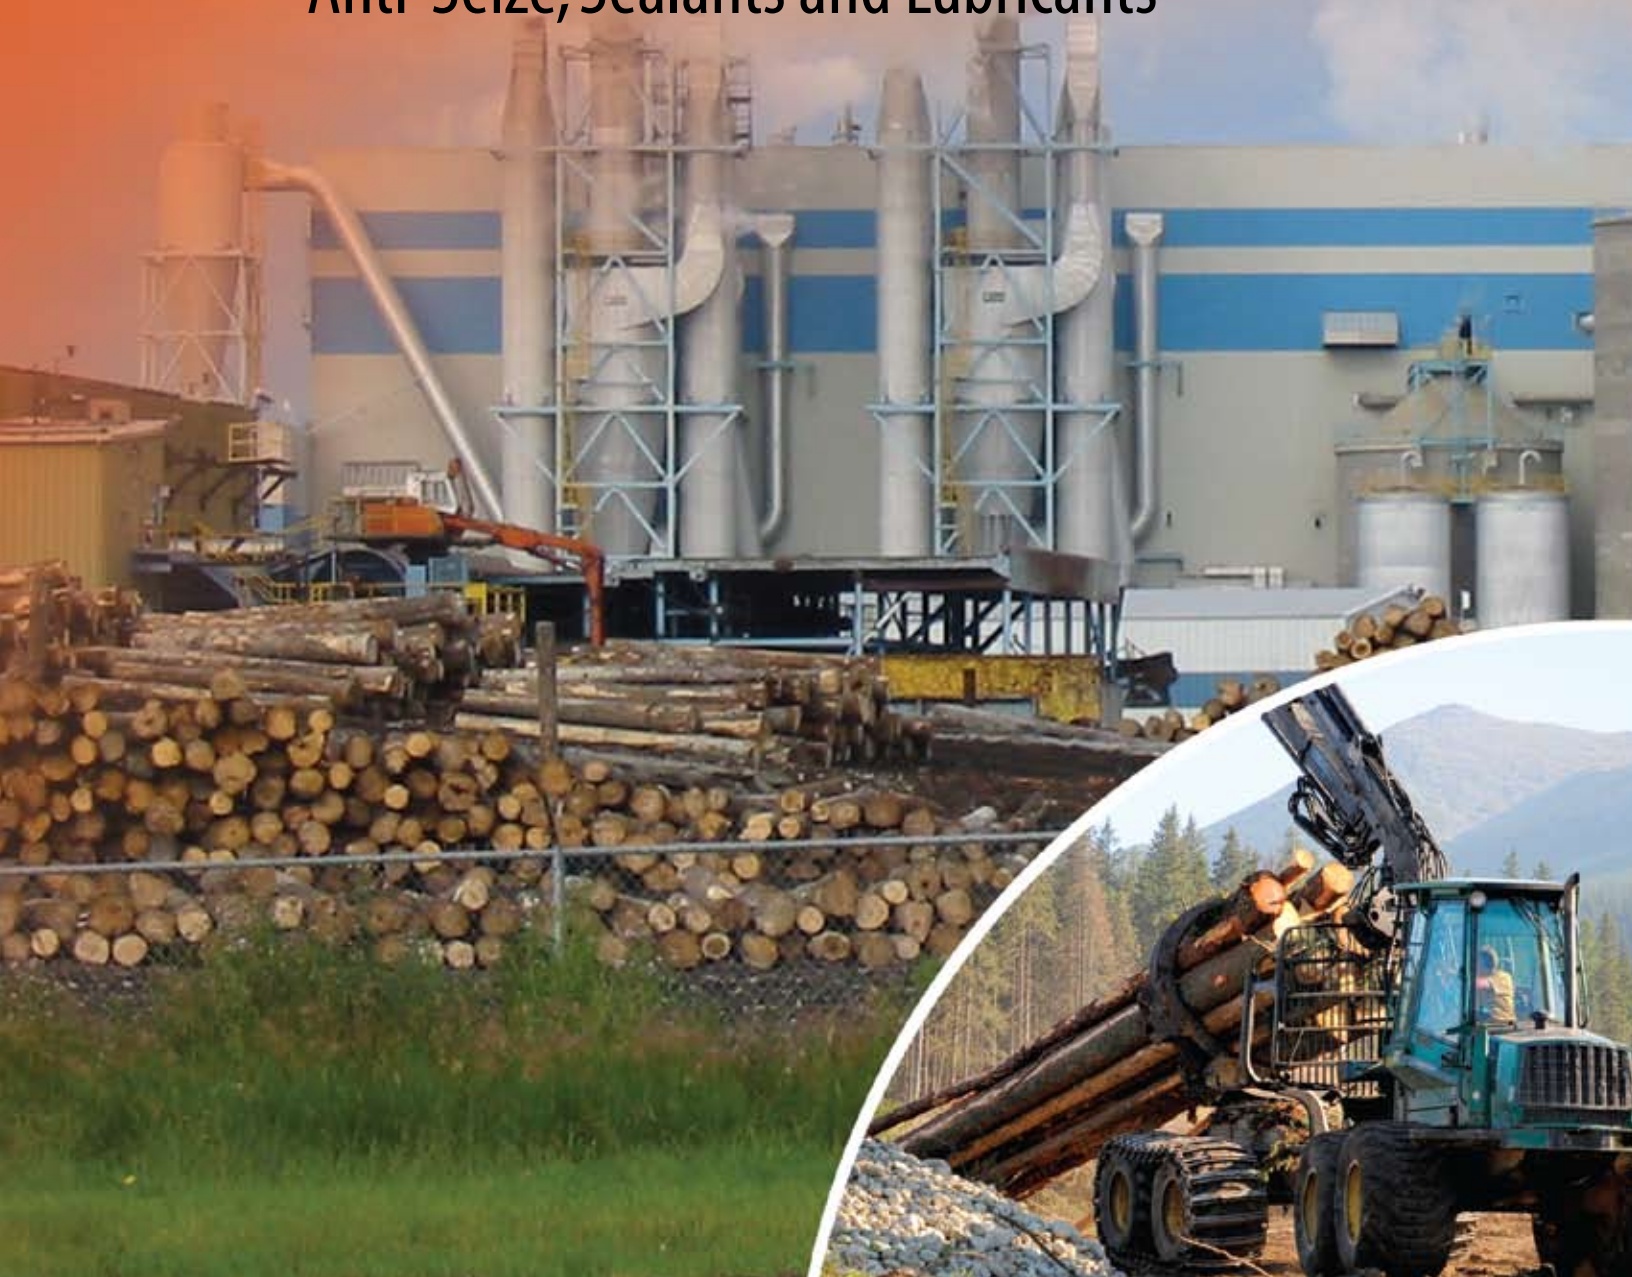





# FORESTRY - PULP & PAPER

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**Alco-EP** - Premium Multi-Purpose Grease

**Alco-EP 73+** - Premium Water Resistant Grease

**Cable-Lube** - Wire Rope and Chain Lubricant

**Gear-Guard** - Paste Open Gear Lubricant

**JL-5000** - Water Based Cleaner and Degreaser

**Jet-Plex EP** - Lithium Complex Multi-Purpose Grease

**JetPump** - Two Stage Hydro-Testing Pump

**Kiln Grease HT** - Extreme Service Lubricant

**Kopr-Kote HT** - High Temperature Anti-Seize

**Moly-Mist** - Dry Film Lubricant

**MotherCutter WB** - Water Based Biodegradable Cutting Fluid

**Nuclear Nonmetallic** - High Temperature Anti-Seize

**OG-H** - Open Gear Lubricant

**Petro-Tape** - PTFE Thread Seal Tape

**Silicone Spray** - Industrial Grade Lubricant

**TF-15** - Thread Sealing Compound



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture - prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of industrial applications. Provides superior wear protection against extreme pressure and is highly water resistant.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37055	120 lb keg
37029	400 lb drum

## Alco-EP-73 Plus™ Premium Water Resistant Grease



**Operating Range** -32°C to 230°C (-25°F to 450°F)

Specially formulated and developed for conditions where extreme water resistance is necessary. Can be used in applications where tolerances are low and/or speeds are high. Provides superior rust and corrosion protection for maximum service life under harsh conditions.

SKU #	Size
37750	14 oz cartridge
37716	35 lb pail
37724	120 lb keg
37729	400 lb drum

## CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

**Today's no. 1 wire rope lubricant & penetrant.** When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

## Gear-Guard™ Paste Open Gear Lubricant



**Operating Range** -32°C to 175°C (-25°F to 350°F)

To be used on open gears, roller gears, drive chains, etc. Provides maximum lubrication and shock-load protection, reduces gear noise, and prevents scoring and welding of gear teeth. Resists heat and pressure, will not wash or wear off because of weather, and will not break down after repeated workings. Is moisture resistant, i.e., actually displacing water.

SKU #	Size
17905	9 lb pail
17941	12 oz aerosol

## JL-5000™ Water Based Cleaner & Degreaser



**Operating Range** 0°C to 100°C (32°F to 212°F)

The safest and most effective cleaner/degreaser available today! To be used on machinery for an effective removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Safe for use on all metal parts and most plastics. When applying, follow the dilution ratio instructions.

SKU #	Size
71043	16 oz trigger spray
71033	1-US gal jug
71035	5-US gal jug
71029	50-US gal drum



## Jet-Plex EP™ Multi-Purpose Grease



**Operating Range** -18° to 260°C (0°F to 500°F)

Recommended for all types of bearing and sliding applications, for shock-loading, pounding, rough usage and high loads. The ideal multi-purpose grease for use in extreme pressure and high temperature operating conditions. Excellent resistance to water and water washout problems. Even under extreme pressures, oil separation is minimal.

SKU #	Size
31750	14 oz cartridge
31706	5 lb pail
31719	5-US gal pail
31724	120 lb keg

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kiln Grease HT™ Extreme Service Lubricant



**Operating Range** -18°C to 260°C (0°F to 400°F)

Exceptionally good for use in paper mill bearings, which are operating under wet and/or hot conditions. Ideal for low speed, plain bearings and sliding surface applications operating under marginal or boundary lubrication conditions, as well as backup or work-roll and table bearings, and ball, roller, and plain bearings. Main characteristics are extreme resistant to heat and oxidation, superior water resistance, protects against high loads, shock, welding and scoring and extends maintenance intervals.

SKU #	Size
75150	14 oz cartridge
75116	5-US gal pail

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar



## Moly Mist MoS<sub>2</sub> Dry Film Lubricant



**Operating Range** -185°C to 400°C (-300°F to 750°F)

To be used wherever a dry lubricant is needed, particularly where temperatures are extreme, where environments are hostile, and where friction must be kept to a minimum. It lowers friction, prevents galling, seizure, stick-slip, fretting, corrosion and metal-to-metal contact. Reduces torque and power consumption. Can be used on chains, gears, or exposed surfaces where a dry lubricant is preferred to prevent a build-up of dirt and corrosion. **NOTE: not for use on oxygen lines.**

SKU #	Size
16041	340 g aerosol
16015	35 lb pail
16075	50-US gal drum

## MotherCutter WB Water Based Biodegradable Cutting Fluid



**Operating Range** -5°C to 85°C (23°F to 185°F)

An Eco-Certified; biodegradable water based cutting fluid designed for a wide range of machine shop applications for both ferrous and non-ferrous metals. Will help to improve your tool life, reduce downtime, reduce HAZMAT disposal costs, and increase your scrap value as it is now "oil free" and ready for pickup. It is the ideal product for light-duty machining and small CNC machines. Recommended at full strength for flooding applications, metalworking involving drilling, sawing, broaching, milling, tapping, threading reaming, drawing, facing, grinding or field machining applications such as pipe cutting and beveling.

SKU #	Size
184316	4 liter jug
184320	20 liter pail

## Nuclear Nonmetallic® High Temperature Anti-Seize Compound



**Operating Range** -53°C to 1315°C (-65°F to 2400°F)

Specifically formulated and designed for use in nuclear and fossil burning power-generating facilities on land and sea, but is also an excellent product for use in pulp and paper plants, where a high purity, non-metallic anti-seize lubricant is required.

SKU #	Size
14902	1/2 lb brush-top

## OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on exposed gears of all types, on steam and power winches, hoists, mill and forge equipment, construction machinery, power shovels and dredges, shovel gears, pulverizers, bull gears, etc. Can be applied on the bearings in slow moving equipment wherever high unit pressures occur. OG-H has excellent "stay put" qualities, will not melt or throw-off and is ideal for use at high temperatures, where other lubricants become runny or drip off.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed: for sealing metal threaded pipe connections not exceeding 3" at the following pressure: natural gas and methane, gasoline, petroleum oils, propane and butane: 2,000 Psi (13,800 kPa)

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

**SKU #** 50741  
**Size** 300 g aerosol

## TF-15 Thread Sealing Compound



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H<sub>2</sub>S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (**except oxygen**), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315° C and pressures to 10,000 PSI.

**SKU #** 23002 225 ml brush top  
23067 250 ml tube  
23004 1 liter jar  
23005 5 liter pail  
23010 10 liter pail  
23015 15 liter pail

## Jet-Lube products listed alphabetically

12/34  
202 Moly-Lith  
550  
769

**A**  
Alco EP  
Alco-EP ECF  
Alco-EP 73 Plus  
AP-1 White  
AP-5  
API-Modified Arctic  
API-Modified  
Arctic Grease  
AX-2

**B**  
Bullseye

**C**  
CableLube  
CB-2  
CC-Lube  
Clean-Up  
Clean-Up Plus  
Creeper-Lube

**E**  
Easy-Clean  
Easy-Clean Liquid  
ECF Anti-Seize  
Eco-Safe  
EMS  
Enviro-Guard  
Enviro-Safe  
EP Bearing Grease  
Extreme

Ezy-Open  
Ezy-Pak 100  
Ezy-Pak 115  
Ezy-Pak 120  
Ezy-Pak 125  
Ezy-Turn 2  
Ezy-Turn 3  
Ezy-Turn 3 Arctic  
Ezy-Turn 4  
Ezy-Turn 5  
Ezy-Turn 6  
Ezy-Turn 8  
Ezy-Turn 12  
Ezy-Turn 14  
Ezy-Turn 22  
Ezy-Turn Body Fill  
Ezy-Turn H<sub>2</sub>S  
Ezy-Turn Polar  
Ezy-Turn PVS

**F**  
FMG  
Food Grade Silicone

**G**  
Gear-Guard  
Graphite Petrolatum

**J**  
J-75  
J-89  
JL-5000  
Jacking System Grease ECF  
Jet-Lok PS-50  
Jet-Lok PS-67  
Jet-Lok TL-72  
Jet-Lube 21

Jet-Plex EP  
JetPump

**K**  
Kiln Grease  
Kollar King  
Kopr-Kote  
Korr-Guard  
Kovr-Kote

**L**  
Lapping Oil  
LBX -Special  
Lite Knight

**M**  
Magic Wrench  
Marine Kopr  
Marine Moly  
Marine MP  
Marine Wire Rope & Hawser  
Grease  
Moly-Arc  
Moly-Mist  
Moly Petrolatum  
Moly-Arc  
MotherCutter  
MP-50

**N**  
NCS-30  
NCS-30 ECF  
Nikal  
Nikal Nuclear  
No. 33  
No. 60  
Nuclear Nonmetallic

**O**  
OG-H  
Oven Chain Lubricant

**P**  
Petro-Tape  
PFPE Grease  
Pitless Adapter Lube  
Plumber's Pal  
Powr-Kote  
PS Terminal

**R**  
RD-N  
RD-P  
Renew  
Riser Bolt Lube  
Rubber Lubricant/Mold  
Release  
RuFF 9  
RuFF 21  
Run-N-Seal  
Run-N-Seal ECF  
Rust Guard

**S**  
Seal Guard  
Seal-Guard ECF  
Sheen Free  
Silicone Compound DM  
Silicone Spray  
Silver Plus  
SS-30

**T**  
Temp-Guard  
TF-15  
TF-500  
TFW  
Top Gun  
Tuff E Nuff

**U**  
Ultra

**V**  
V-2

**W**  
Well-Guard  
White Knight  
White Lithium  
Wire Line Lubricant ECF  
WLD  
WRL

**Z**  
Z-50  
Z-Plate  
Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garmy@jetlubecanada.com](mailto:garmy@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.








J e t - L u b e o f C a n a d a L t d .

# HVAC - PLUMBING & HEATING

Anti-Seize, Sealants and Lubricants

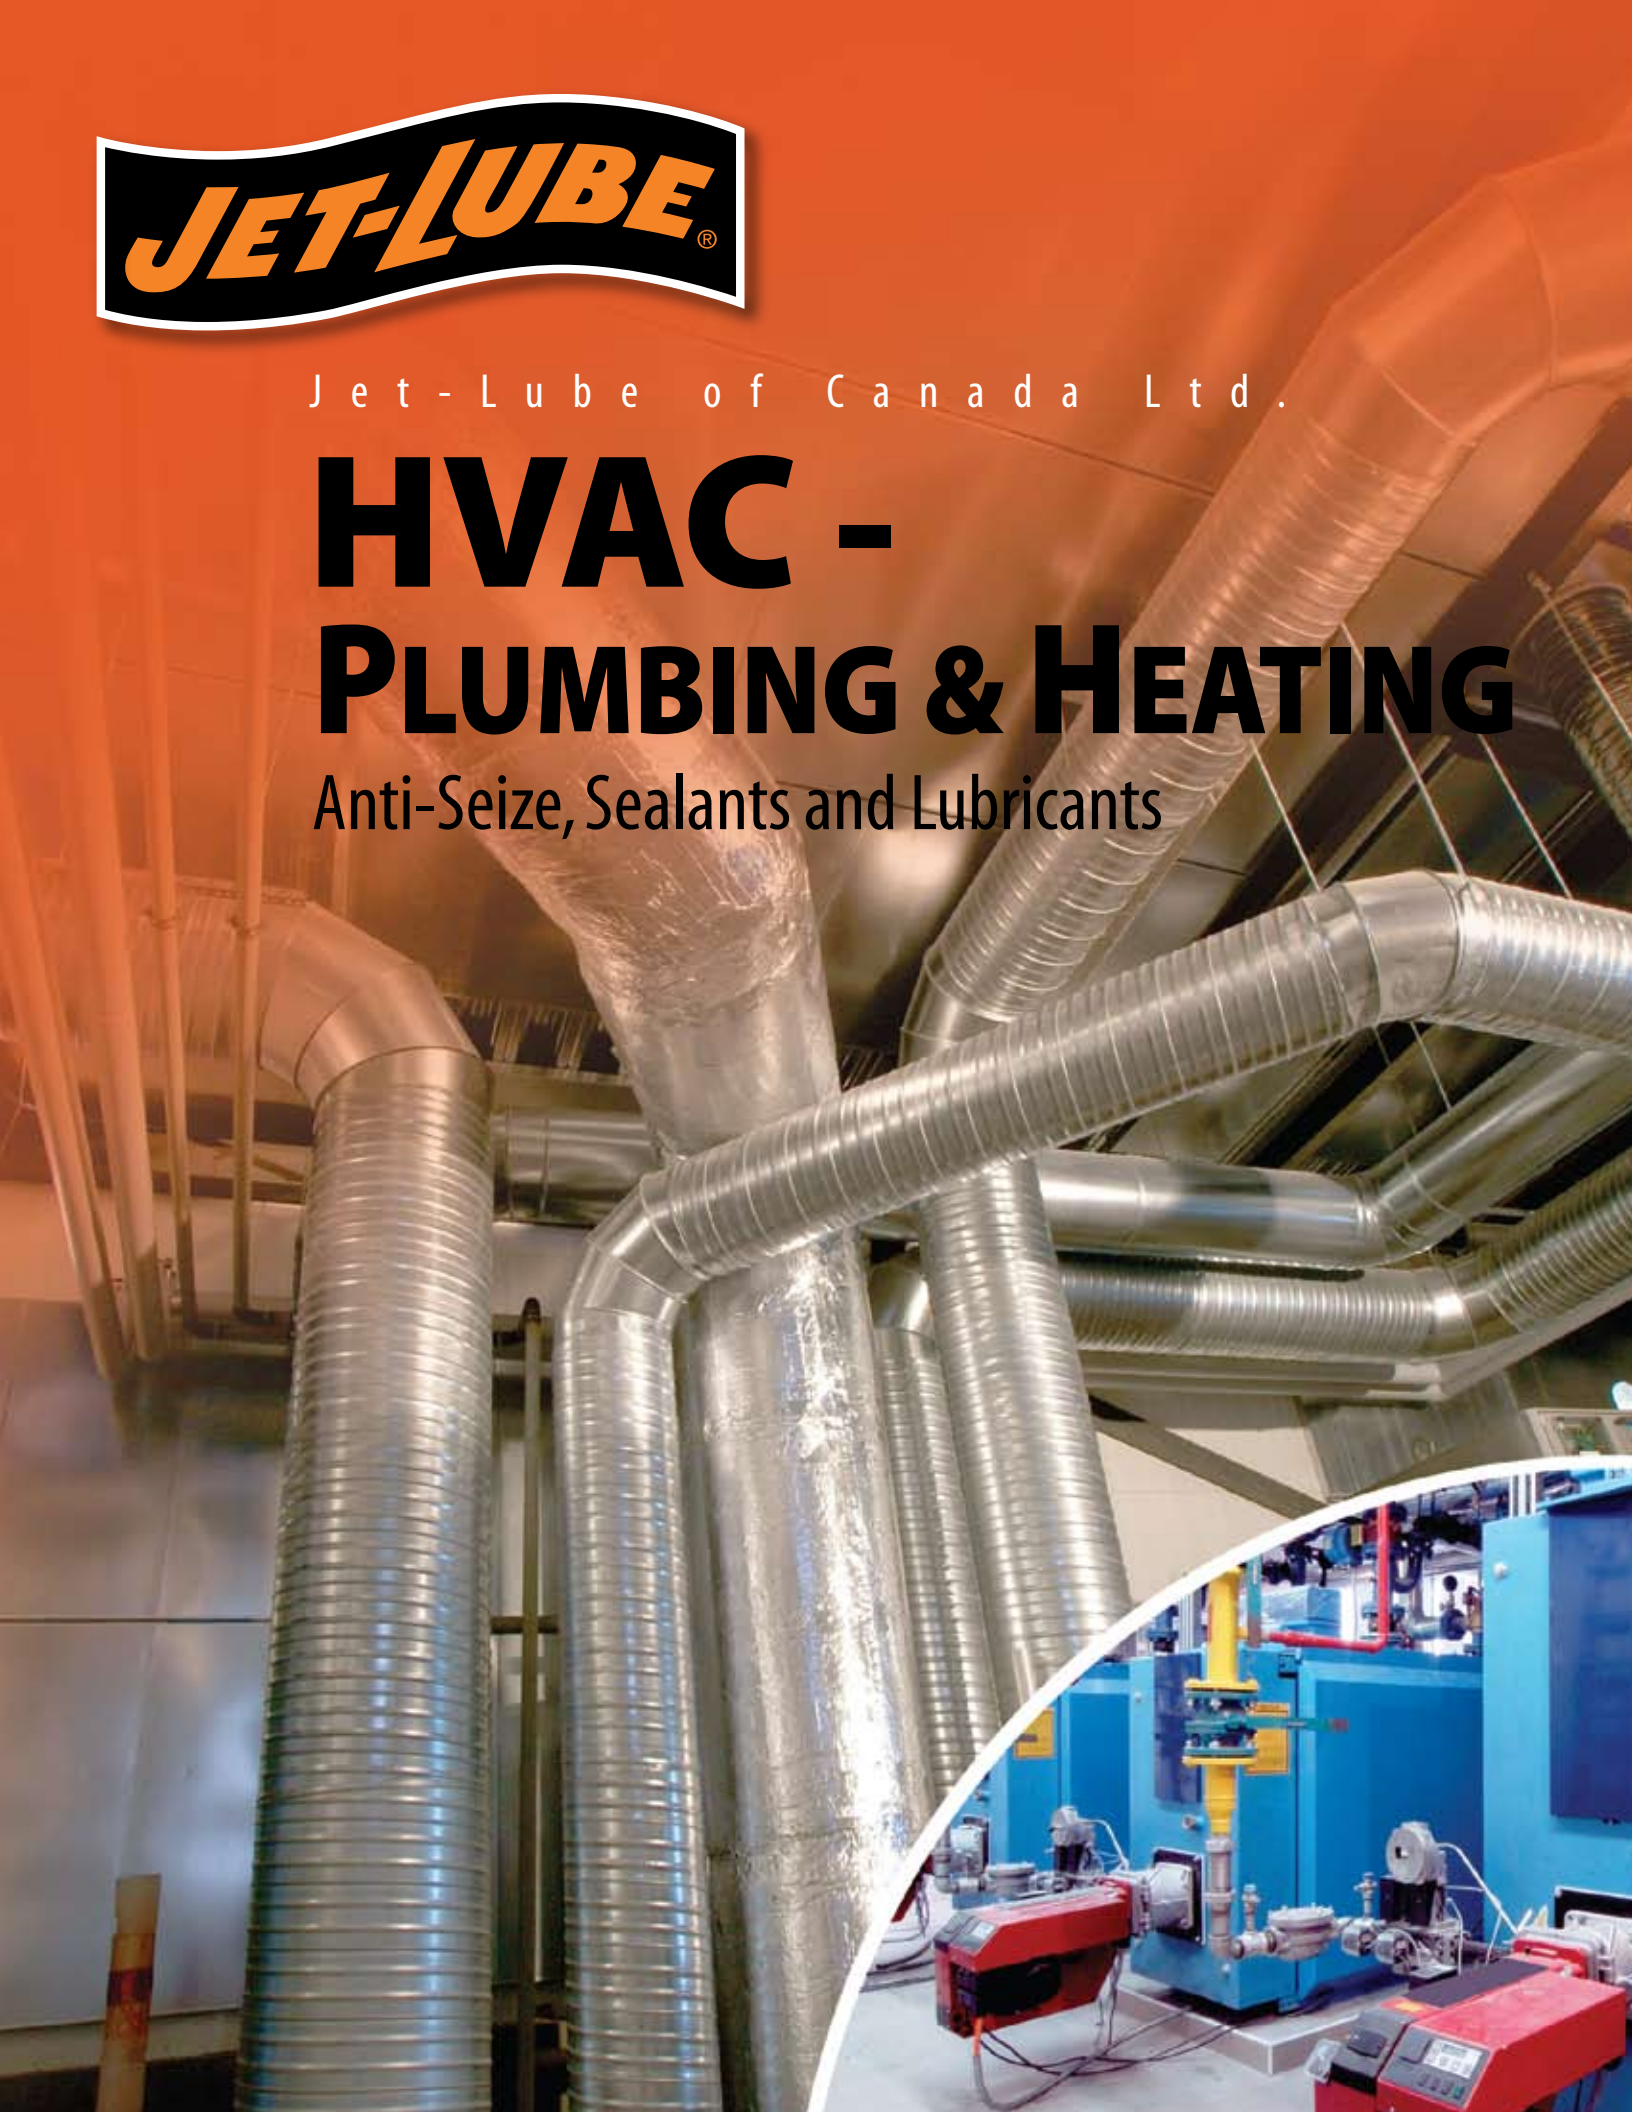





# HVAC-PLUMBING & HEATING

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**Jet-Lok PS-50** - Anaerobic Thread Sealant

**Jet-Lok PS-67** - PTFE Filled Anaerobic Thread Sealant

**Jet-Lok TL-72** - High Temperature Thread Locker

**JetPump** - Two Stage Hydro-Testing Pump

**Kopr-Kote HT** - High Temperature Anti-Seize

**MotherCutter WB** - Water Based Biodegradable Cutting Fluid

**Nikal** - High Temperature Anti-Seize

**Petro-Tape** - PTFE Thread Seal Tape

**Silicone Spray** - Industrial Grade Lubricant

**TF-15** - Thread Sealing Compound

**TFW** - Multi-Purpose Thread Sealant with PTFE

**V-2** - Multi-Purpose PTFE Thread Sealant

**Z-Plate** - Zinc-Rich Galvanize



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture - prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Jet-Lok® PS-50 Anaerobic Thread Sealant



**Operating Range** -54°C to 65°C (-65°F to 180°F)

A medium strength, high performance sealant designed for the locking and sealing of metal threaded pipes and fittings. Ideal sealing against gases, water, LPG, hydrocarbons, oils and other chemicals. Also suitable for stainless steel surfaces without the need for surface activation. Designed as well for coarse threads.

SKU #	Size
57766	150 ml tube
57765	225 ml tube

## Jet-Lok® PS-67 PTFE filled Anaerobic Thread Sealant



**Operating Range** -54°C to 204°C (-65°F to 400°F)

A highly shock and vibration resistant sealant, typically used for sealing piping systems carrying gases, water, LPG, hydrocarbons, oils, gasoline and other chemicals. Extensively used on pressure vessels, air compressors, hydraulic systems, tanks, etc. **NOT recommended for use in pure oxygen and/or oxygen rich systems. Should NOT be selected as a sealant for chlorine or other strong oxidizing materials.**

SKU #	Size
57666	50 ml tube
57667	225 ml tube

## Jet-Lok® TL-72 High-Temperature Thread Locking Compound



**Operating Range** -55°C to 204°C (-65°F to 400°F)

To be used for high-temperature locking and sealing of studs, nuts, screws, bolts and fittings against leakage, contamination and corrosion. Recommended for parts that do not require routine maintenance. More suitable for larger diameter, coarse threaded parts, because of its viscosity.

SKU #	Size
55566	50 ml tube
55565	225 ml tube

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

## MotherCutter WB Water Based Biodegradable Cutting Fluid



**Operating Range** -5°C to 85°C (23°F to 185°F)

An Eco-Certified, biodegradable water based cutting fluid designed for a wide range of machine shop applications for both ferrous and non-ferrous metals. Will help to improve your tool life, reduce downtime, reduce HAZMAT disposal costs, and increase your scrap value as it is now "oil free" and ready for pickup. It is the ideal product for light-duty machining and small CNC machines. Recommended at full strength for flooding applications, metalworking involving drilling, sawing, broaching, milling, tapping, threading reaming, drawing, facing, grinding or field machining applications such as pipe cutting and beveling.

SKU #	Size
184316	4 liter jug
184320	20 liter pail

## Nikal® Pure Nickel Extreme Temperature Anti-Seize



**Operating Range** -54°C to 1427°C (-65°F to 2600°F)

Premium quality anti-seize and gasket compound, ideal for use in extreme temperatures and hostile environments. Can be applied on items, such as burner tips, manifolds, pipe fittings, furnace hinges, heat exchangers, manhole studs. May be safely used with ammonia, acetylene and vinyl monomers, which are unstable in the presence of copper. Contains no graphite, which is an additional benefit on stainless steel applications. **Note: Not for use on oxygen or LPG lines !**

SKU #	Size
13602	225 ml brush top
13604	1 liter jar
13605	5 liter pail
13615	15 liter pail
13655	55 liter drum

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, **Petro-Tape** is far superior to other PTFE tapes for heavy-duty use. ULC Listed: for sealing metal threaded pipe connections not exceeding 3" at the following pressure: natural gas and methane, gasoline, petroleum oils, propane and butane: 2,000 Psi (13,800 kPa)

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol



## TF-15 Thread Sealing Compound



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H<sub>2</sub>S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (**except oxygen**), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315° C and pressures to 10,000 PSI.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

## TFW™ Multi-Purpose Thread Sealant with PTFE



**Operating Range** -18°C to 260°C (0°F to 500°F)

May be used on steel, aluminum, brass, copper, iron, reinforced fiberglass, PVC, CPVC and ABS threaded connections. Specifically formulated to seal threaded connections against leakage due to internal pressure. Recommended for threaded pipe carrying air, ammonia, freons, heating oils, LPG, steam, water, etc. Is listed under the Uniform Plumbing Code (UPC), File No. 1282. **Note: NOT for use on oxygen lines !**

SKU #	Size
24002	1/2 pint brush top
24004	1 pint brush top
24023	1-US gal pail
24015	5-US gal pail

## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Range** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc., (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases. NSF registered (P1).

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Z-Plate™ Zinc-Rich Galvanize



**Operating Range** -185°C to 400°C (-300°F to 750°F)

Excellent product for cosmetic repairs of welded joints, storage tanks, pipelines, heat ducts, etc. Provides the protection of hot-dip galvanizing plus the convenience of on-the-job aerosol application. Protects against rust, rust spreading and corrosion.

SKU #	Size
60541	340 g aerosol

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube ofCanada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.






J e t - L u b e o f C a n a d a L t d .

# MANUFACTURING & MRO

Anti-Seize, Sealants and Lubricants

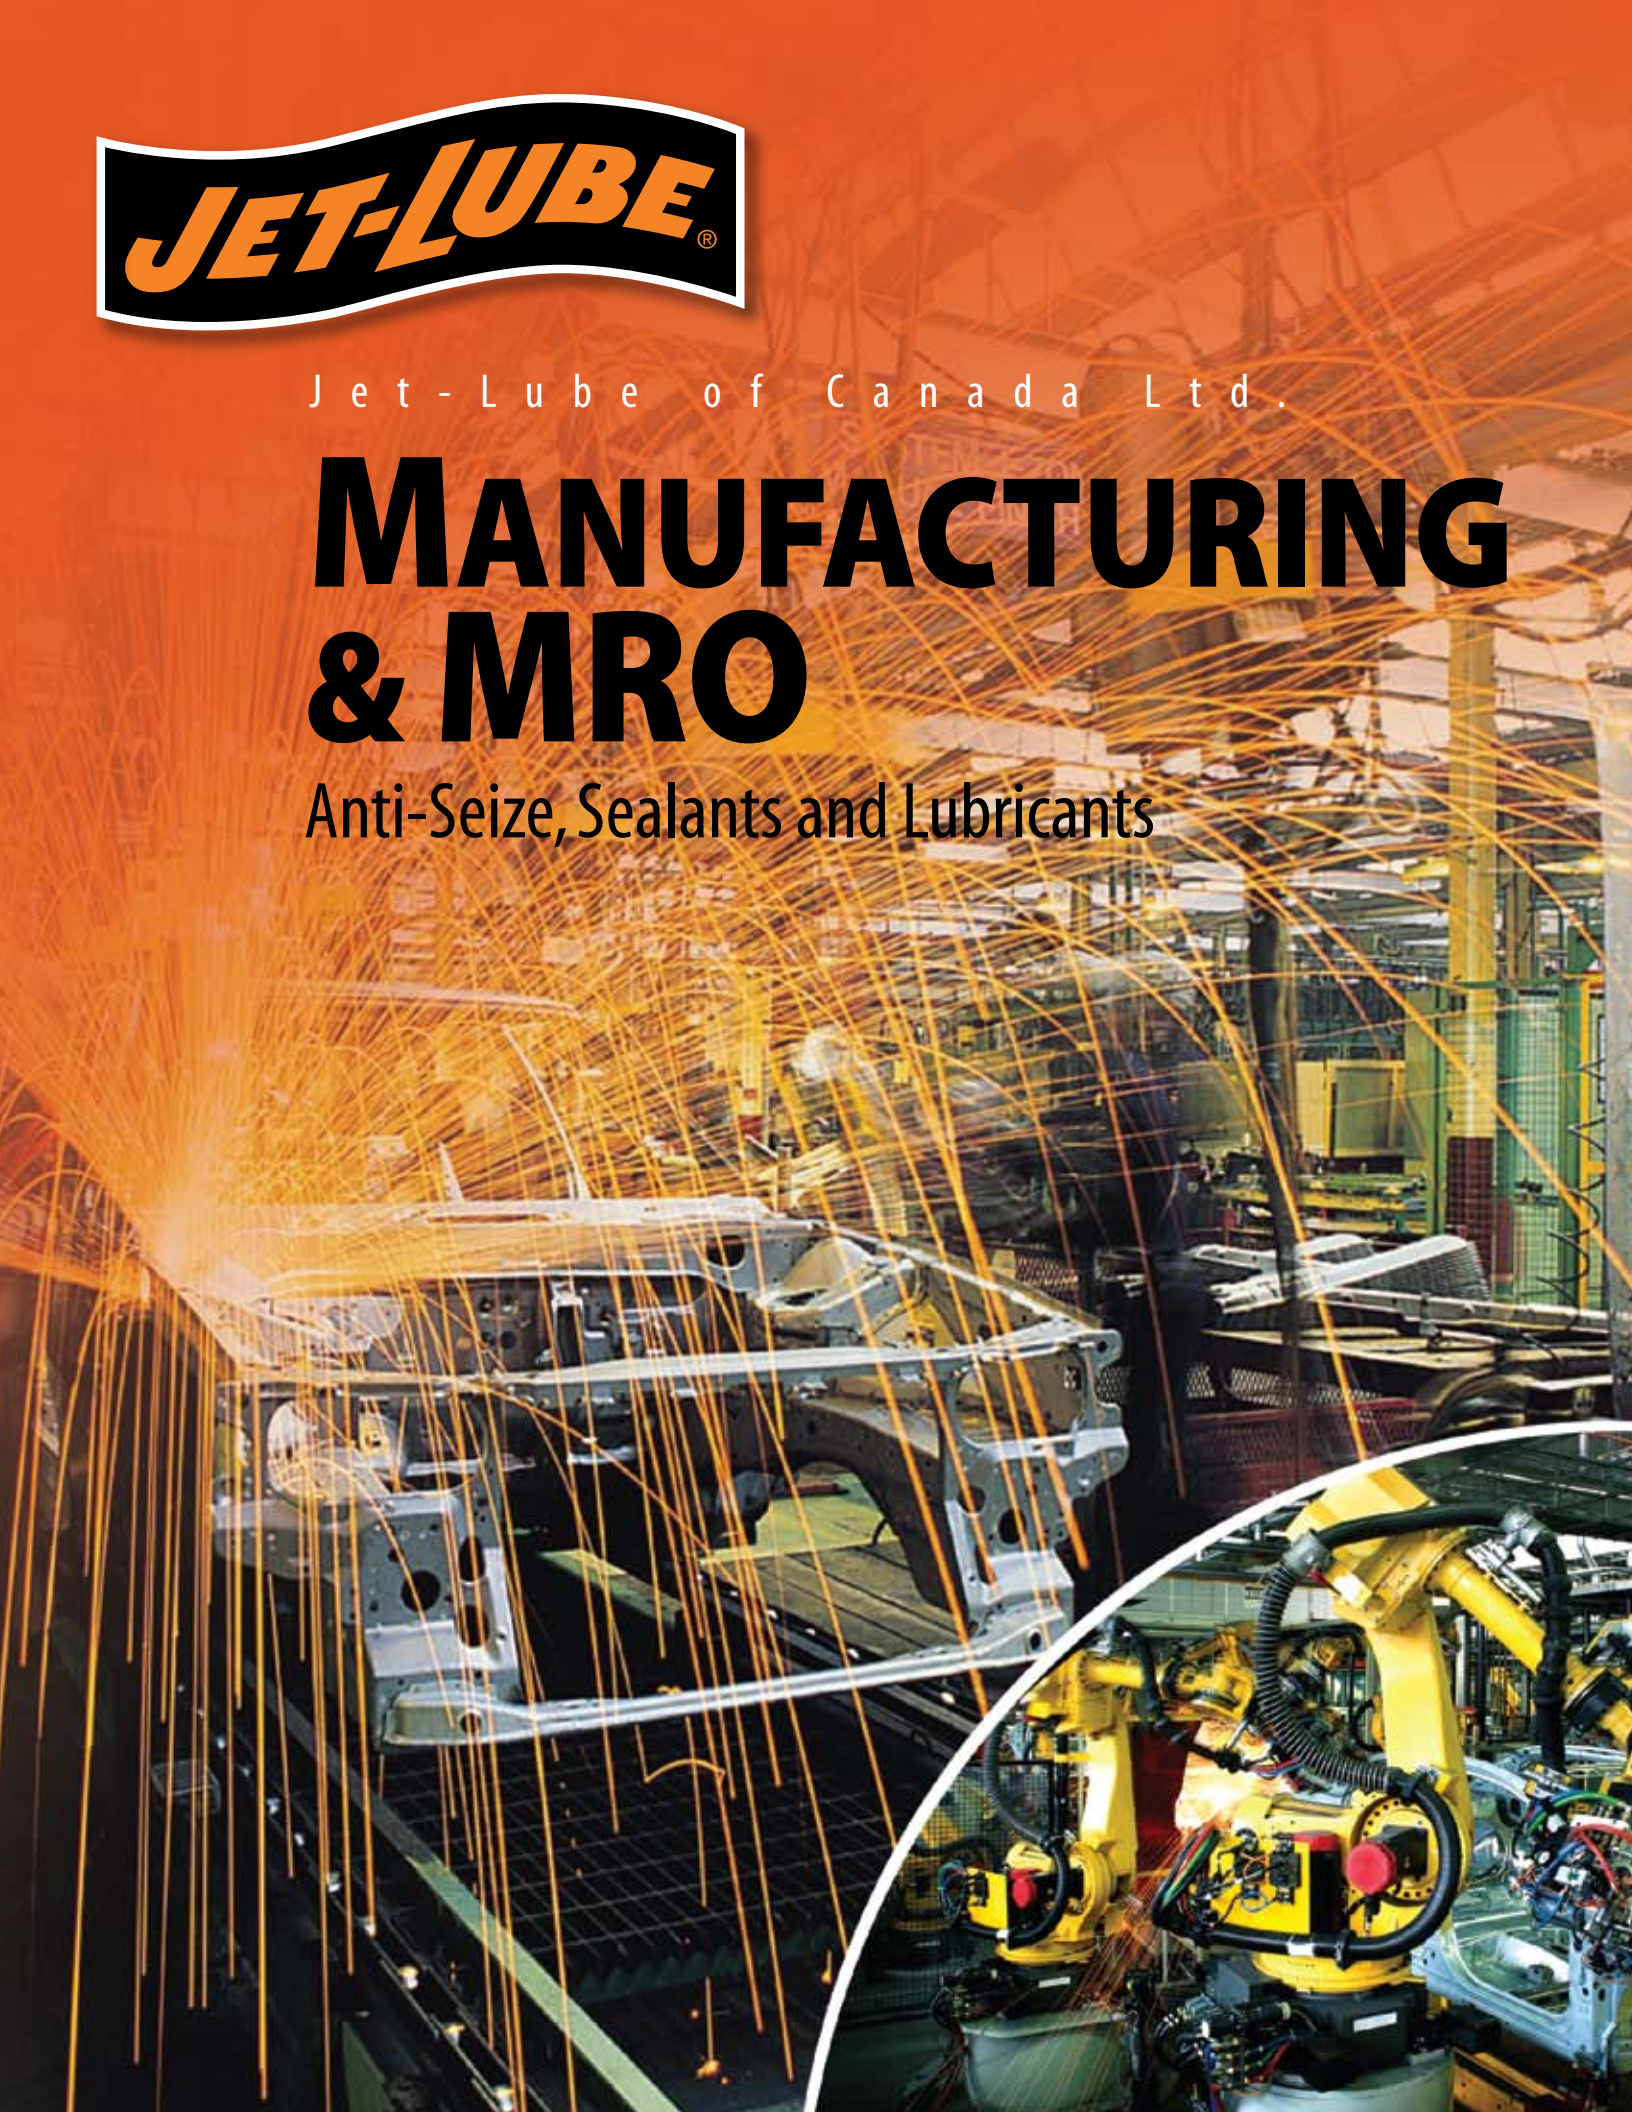





# MANUFACTURING & MRO

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**AP-5** - High Temperature Grease with Molybdenum Disulphide

**Cable-Lube** - Wire Rope and Chain Lubricant

**Clean-Up** - Industrial Strength Cleaner and Degreaser

**Clean-Up Plus** - Organic Solvent Cleaner and Degreaser

**EP Bearing Grease** - Extreme Pressure Multi-Purpose Grease

**JetPump** - Two Stage Hydro-Testing Pump

**JL-5000** - Environmentally Safe Water Based Cleaner

**Kopr-Kote HT** - High Temperature Anti-seize

**Lapping Oil** - Grinding and Polishing Oil

**Magic Wrench** - Super Penetrant

**MotherCutter WB** - Water Based Biodegradable Cutting Fluid

**MP-50** - Low Friction Moly Paste Lubricant

**OG-H** - Open Gear Lubricant

**Petro-Tape** - PTFE Thread Seal Tape

**Silicone Spray** - Industrial Grade Lubricant

**TF-15** - Thread Sealant

**White Lithium** - Premium All-Purpose Grease with PTFE



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture, prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## AP-5 High Temperature All-Purpose Grease



**Operating Range** -25°C to 288°C (-13°F to 550°F)

Recommended for use on ball, roller and sleeve bearings, shackles, conveyor chains, sealed assemblies, etc. Provides heavy-duty long-life protection in heavy equipment. When applied, it means that all your mechanical components, which are demanding superior lubrication, will last 2 to 10 times longer than when a regular grease has been applied. Especially recommended for lubrication points prone to neglect.

SKU #	Size
25067	250 ml squeeze tube
25050	400 g cartridge
25004	1 liter jar
25005	5 liter pail
25010	10 liter pail
25055	55 liter keg
25075	205 liter drum

## CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

Today's no. 1 wire rope lubricant and penetrant. When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the CableLube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

## Clean-Up™ Industrial Cleaner & Solvent



**29 KV dielectric strength**

Ideal for cleaning items, such as engine components, motors, machine parts, cement flooring, gears, chains, bearings, appliances, cables, tools, metal surfaces, injectors. Effectively dissolves grease, oil, paint, grime, dirt and dust. **NOTE: its high solvency can adversely affect certain paints and plastics, so product should be tested on critical surfaces, prior to large scale usage.**

SKU #	Size
61542	510 g aerosol
61535	5-US gal pail

## Clean-Up Plus™ Organic Solvent Cleaner & Degreaser



**29 KV dielectric strength**

Specially formulated and designed to quickly dissolve and rinse away dirt, grease, grime, oil, tar and wax, while being both environmentally safe and ozone friendly. Ideal for a wide range of industrial cleaning applications, such as tools, chains, machine parts, electric motors, forklifts, bearings, etc. Safe on all metals and most plastics.

SKU #	Size
72542	15 oz aerosol
72535	5-US gal pail

## EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



**Operating Range** -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals, and is particularly useful where a single, multi-purpose product is desirable. This grease has a multitude of industrial applications, where an exceptionally high quality, multi-purpose lubricant is required. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial usage.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

## JL 5000™ Water Based Cleaner & Degreaser



**Operating Range** 0°C to 100°C (32°F to 212°F)

**The safest and most effective cleaner/degreaser available today!** To be used for industrial cleaning applications for an effective removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Safe for use on all metal parts and most plastics. When applying, follow the dilution ratio instructions.

SKU #	Size
71043	16 oz trigger spray
71033	1-US gal jug
71035	5-US gal jug
71029	50-US gal drum



## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion, it lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs, is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

## Lapping Oil MoS<sub>2</sub> Dry Film Lubricant



**Operating Range** -40°C to 120°C (-40°F to 248°F)

A high quality, low viscosity oil, to be used as a carrier for a wide variety of abrasives used in polishing molds, toolings, metal surfaces, etc. Cools and lubricates the surface being finished, keeps abrasives in suspension and removes residue.

SKU #	Size
188675	200 liter drum



## Magic Wrench® Super Penetrant



**Operating Range** -51°C to 177°C (-60°F to 350°F)

Attacks rust and corrosion quickly and safely, in order to free corroded parts, loosen nuts and assist in the disassembly of mechanical components. Is safe on all metals and plastics. Ideal product for the lubrication and conditioning of air tools.

SKU #	Size
39541	13 oz aerosol
39533	1-US gal jug
39535	5-US gal jug



## MotherCutter WB Water Based Biodegradable Cutting Fluid



**Operating Range** -5°C to 85°C (23°F to 185°F)

An Eco-Certified, biodegradable water based cutting fluid designed for a wide range of machine shop applications for both ferrous and non-ferrous metals. Will help to improve your tool life, reduce downtime, reduce HAZMAT disposal costs, and increase your scrap value as it is now "oil free" and ready for pickup. It is the ideal product for light-duty machining and small CNC machines. Recommended at full strength for flooding applications, metalworking involving drilling, sawing, broaching, milling, tapping, threading reaming, drawing, facing, grinding or field machining applications such as pipe cutting and beveling.

SKU #	Size
184316	4 liter jug
184320	20 liter pail

## MP-50™ Low Friction Moly Paste



**Operating Range** -25°C to 400°C (-13°F to 750°F)

A product with a multitude of uses. It protects production tools and taps, prevents seizure and freezing of bolts and studs. It reduces torque on makeup and dismantling of any threaded or screwed fitting, used extensively for lubricating bushings and guideposts on die sets. Also used on assembly and disassembly of press and shrink fits of pins, shafts, bushings, sprockets, gears and bearings. Eliminates galling and distortion. May be applied directly to hot surfaces without running off or dripping.

SKU #	Size
28002	225 ml brush top
28004	1 liter jar
28005	5 liter pail
28010	10 liter pail
28050	400 g cartridge

## OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on exposed gears of all types, on steam and power winches, hoists, mill and forge equipment, construction machinery, power shovels and dredges, shovel gears, pulverizers, bull gears, etc. Can be applied on the bearings in slow moving equipment wherever high unit pressures occur. OG-H has excellent "stay put" qualities, will not melt or throw-off and is ideal for use at high temperatures, where other lubricants become runny or drip off.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed: for sealing metal threaded pipe connections not exceeding 3" for natural gas and methane, gasoline, petroleum oils, propane and butane.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## TF-15 Thread Sealing Compound



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H<sub>2</sub>S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (**except oxygen**), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315°C and pressures to 10,000 PSI.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

## White Lithium Grease All-Purpose Grease with PTFE



**Operating Range** -18°C to 190°C (0°F to 370°F)

A premium all-purpose grease that provides superior performance and protection for metal-to-metal (moving) parts, it penetrates and forms a long-lasting protective film to withstand heavy loads and high speeds. Prevents rust and corrosion, eliminates squeaks and squeals and will not run or wash away. Excellent for industrial applications, such as machinery tools, overhead garage door channels, fan motors, slides, etc.

SKU #	Size
50350	14 oz cartridge
50341	13 oz aerosol
50305	1 lb can
50316	35 lb pail
50324	120 lb keg



## Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	<b>O</b>	<b>T</b>
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	<b>K</b>		TF-500
<b>A</b>	Ezy-Pak 125	Kiln Grease	<b>P</b>	TFW
Alco EP	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco-EP ECF 	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP 73 Plus	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	<b>U</b>
AP-1 White	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	Ultra
AP-5	Ezy-Turn 5		Powr-Kote	
API-Modified Arctic	Ezy-Turn 6	<b>L</b>	PS Terminal	
API-Modified	Ezy-Turn 8	Lapping Oil		<b>V</b>
Arctic Grease	Ezy-Turn 12	LBX -Special	<b>R</b>	V-2
AX-2	Ezy-Turn 14	Lite Knight	RD-N	
	Ezy-Turn 22		RD-P	<b>W</b>
	Ezy-Turn Body Fill	<b>M</b>	Renew	Well-Guard 
<b>B</b>	Ezy-Turn H <sub>2</sub> S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
<b>C</b>		Marine MP	RuFF 21	WLD
CableLube	<b>F</b>	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	<b>Z</b>
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	<b>G</b>	Moly-Arc	<b>S</b>	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
<b>E</b>			Sheen Free 	
Easy-Clean	<b>J</b>	<b>N</b>	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.







J e t - L u b e o f C a n a d a L t d .

# MARINE

Anti-Seize, Sealants and Lubricants





# MARINE

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant and Penetrant

**Alco-EP ECF** - Extreme Service Multi-Purpose Grease

**Cable-Lube** - Wire Rope and Chain Lubricant

**JL-5000** - Water Based Cleaner and Degreaser

**Marine-Kopr** - Copper Anti-Seize Compound

**Marine-Moly** - MoS<sub>2</sub> Paste

**Marine MP** - Multi-Purpose Grease

**Marine Wire Rope & Hawser Grease** - High Performance Grease

**PS Terminal** - Electrical Contact Cleaner

**Rust Guard** - Corrosion Inhibitor

**Sheen-Free** - Wire Rope Preservative and Lubricant

**Silicone Spray** - Industrial Grade Lubricant



For a complete listing of our products visit: [www.jetlubecanada.com](http://www.jetlubecanada.com)



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability'. Removes moisture and prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP ECF Extreme Service Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Specially formulated and developed for subsea or other conditions where extreme water resistance is necessary. Extremely resistant to rust and corrosion and is ideally suited for use in high-moisture areas. Can also be used in areas where tolerances are low and/or speeds are high.

SKU #	Size
37150	14 oz cartridge



## CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

Today's no. 1 wire rope lubricant and penetrant. When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

## JL-5000™ Water Based Cleaner & Degreaser



**Operating Range** 0°C to 100°C (32°F to 212°F)

The safest and most effective cleaner/degreaser available today! Can effectively be used for the removal of carbon, grease, oil and other organic deposits, while being both environmentally safe and ozone friendly. Safe to use on all metal parts and most plastics. When applying, follow the dilution ratio instructions.

SKU #	Size
71043	16 oz trigger spray
71033	1-US gal jug
71035	5-US gal jug
71029	50-US gal drum



## Marine-Kopr™ Copper Anti-Seize Compound



**Operating Range** 54°C to 982°C (-65°F to 1800°F)

Recommended for use on all marine threaded and flanged connections to prevent galling, seizure and heat welding, and to reduce torque requirements. Prevents rust and corrosion over broad temperature ranges. Manufactured to exacting marine specifications ensuring extra protection in extreme marine conditions.

SKU #	Size
09702	1/2 lb brush top
09704	1 lb brush top

## Marine Moly™ Molybdenum Disulphide Lubricating Paste



**Operating Range** --185°C to 400°C (-300°F to 750°F)

Extremely resistant to water, withstands extreme weather elements and helps prevent corrosion on metal exposed to water, steam, salt spray, etc. Can be applied on highly loaded gears, loading racks and arms, marine transmission gears, open spur gears and sliding bases.

SKU #	Size
65005	1 lb plug top
65041	12 oz aerosol

## Marine-MP Multi-Purpose Grease



**Operating Range** -18°C to 163°C (0°F to 325°F)

Ideal for a multitude of "on-board" applications where both economy and performance are important. Can be used on pivot pins, plain bearings, anchor cables, anti-friction bearings and hoist lines. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation and other adverse conditions common to marine usage.

SKU #	Size
63050	14 oz cartridge
63016	35 lb pail

## Marine Wire Rope & Hawser Grease™ High Performance Lubricant



**Operating Range** -18°C to 163°C (0°F to 325°F)

A high performance lubricant for wire ropes, hawser ropes and related applications requiring a water resistant, tenacious product that resists the effects of fresh and salt water spray, oxidation, humidity, heat and other adverse conditions, which are common to marine applications. Maintains and extends the life and performance of the ropes by providing a non-drying film on the outside of the rope. This film protects the rope from corrosion, while lubricating the inner strands, drums and sheaves.

SKU #	Size
34516	35 lb pail

## PS Terminal™ Electrical Contact Cleaner



**35 KV dielectric strength**

To be used for the removal of dirt, grease and organic contaminants from electrical and electronic components and equipment. Because of its formula (a blend of HFC solvents) it will not damage the environment or ozone levels. When applied it evaporates leaving a residue-free surface.

SKU #	Size
60242	454 g aerosol

## Rust-Guard™ Corrosion Inhibitor



**Operating Range** -30°C to 138°C (-20°F to 280°F)

To be used to provide a long-term protection against rust and corrosion on all metal and alloy surfaces, even under harsh environmental conditions, such as water, high humidity or salt spray. Will fully penetrates into even the smallest crevices to displace moisture.

SKU #	Size
13241	11 oz aerosol
13233	1-US gal can
13235	5-US gal pail
13229	50-US gal drum



## Sheen-Free™ Wire Rope Lubricant/Preservative



**Operating Range** -10°C to 205°C (-14°F to 400°F)

Ideal for standing rigging, where a water resistant coating is necessary and for running rigging, where the performance is a must. Also recommended for bright/black wire, stainless steel and galvanized cables for mooring and lashing applications. SHEEN-FREE's protective film is a **non-hazardous, biodegradable, non-sheening** preservative and lubricant, which makes it an ideal product for the marine industry.

SKU #	Size
33720	5 gal US pail
33724	15 US gal drum
33729	50 US gal drum

---

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.






J e t - L u b e o f C a n a d a L t d .

# MILITARY

Anti-Seize, Sealants and Lubricants

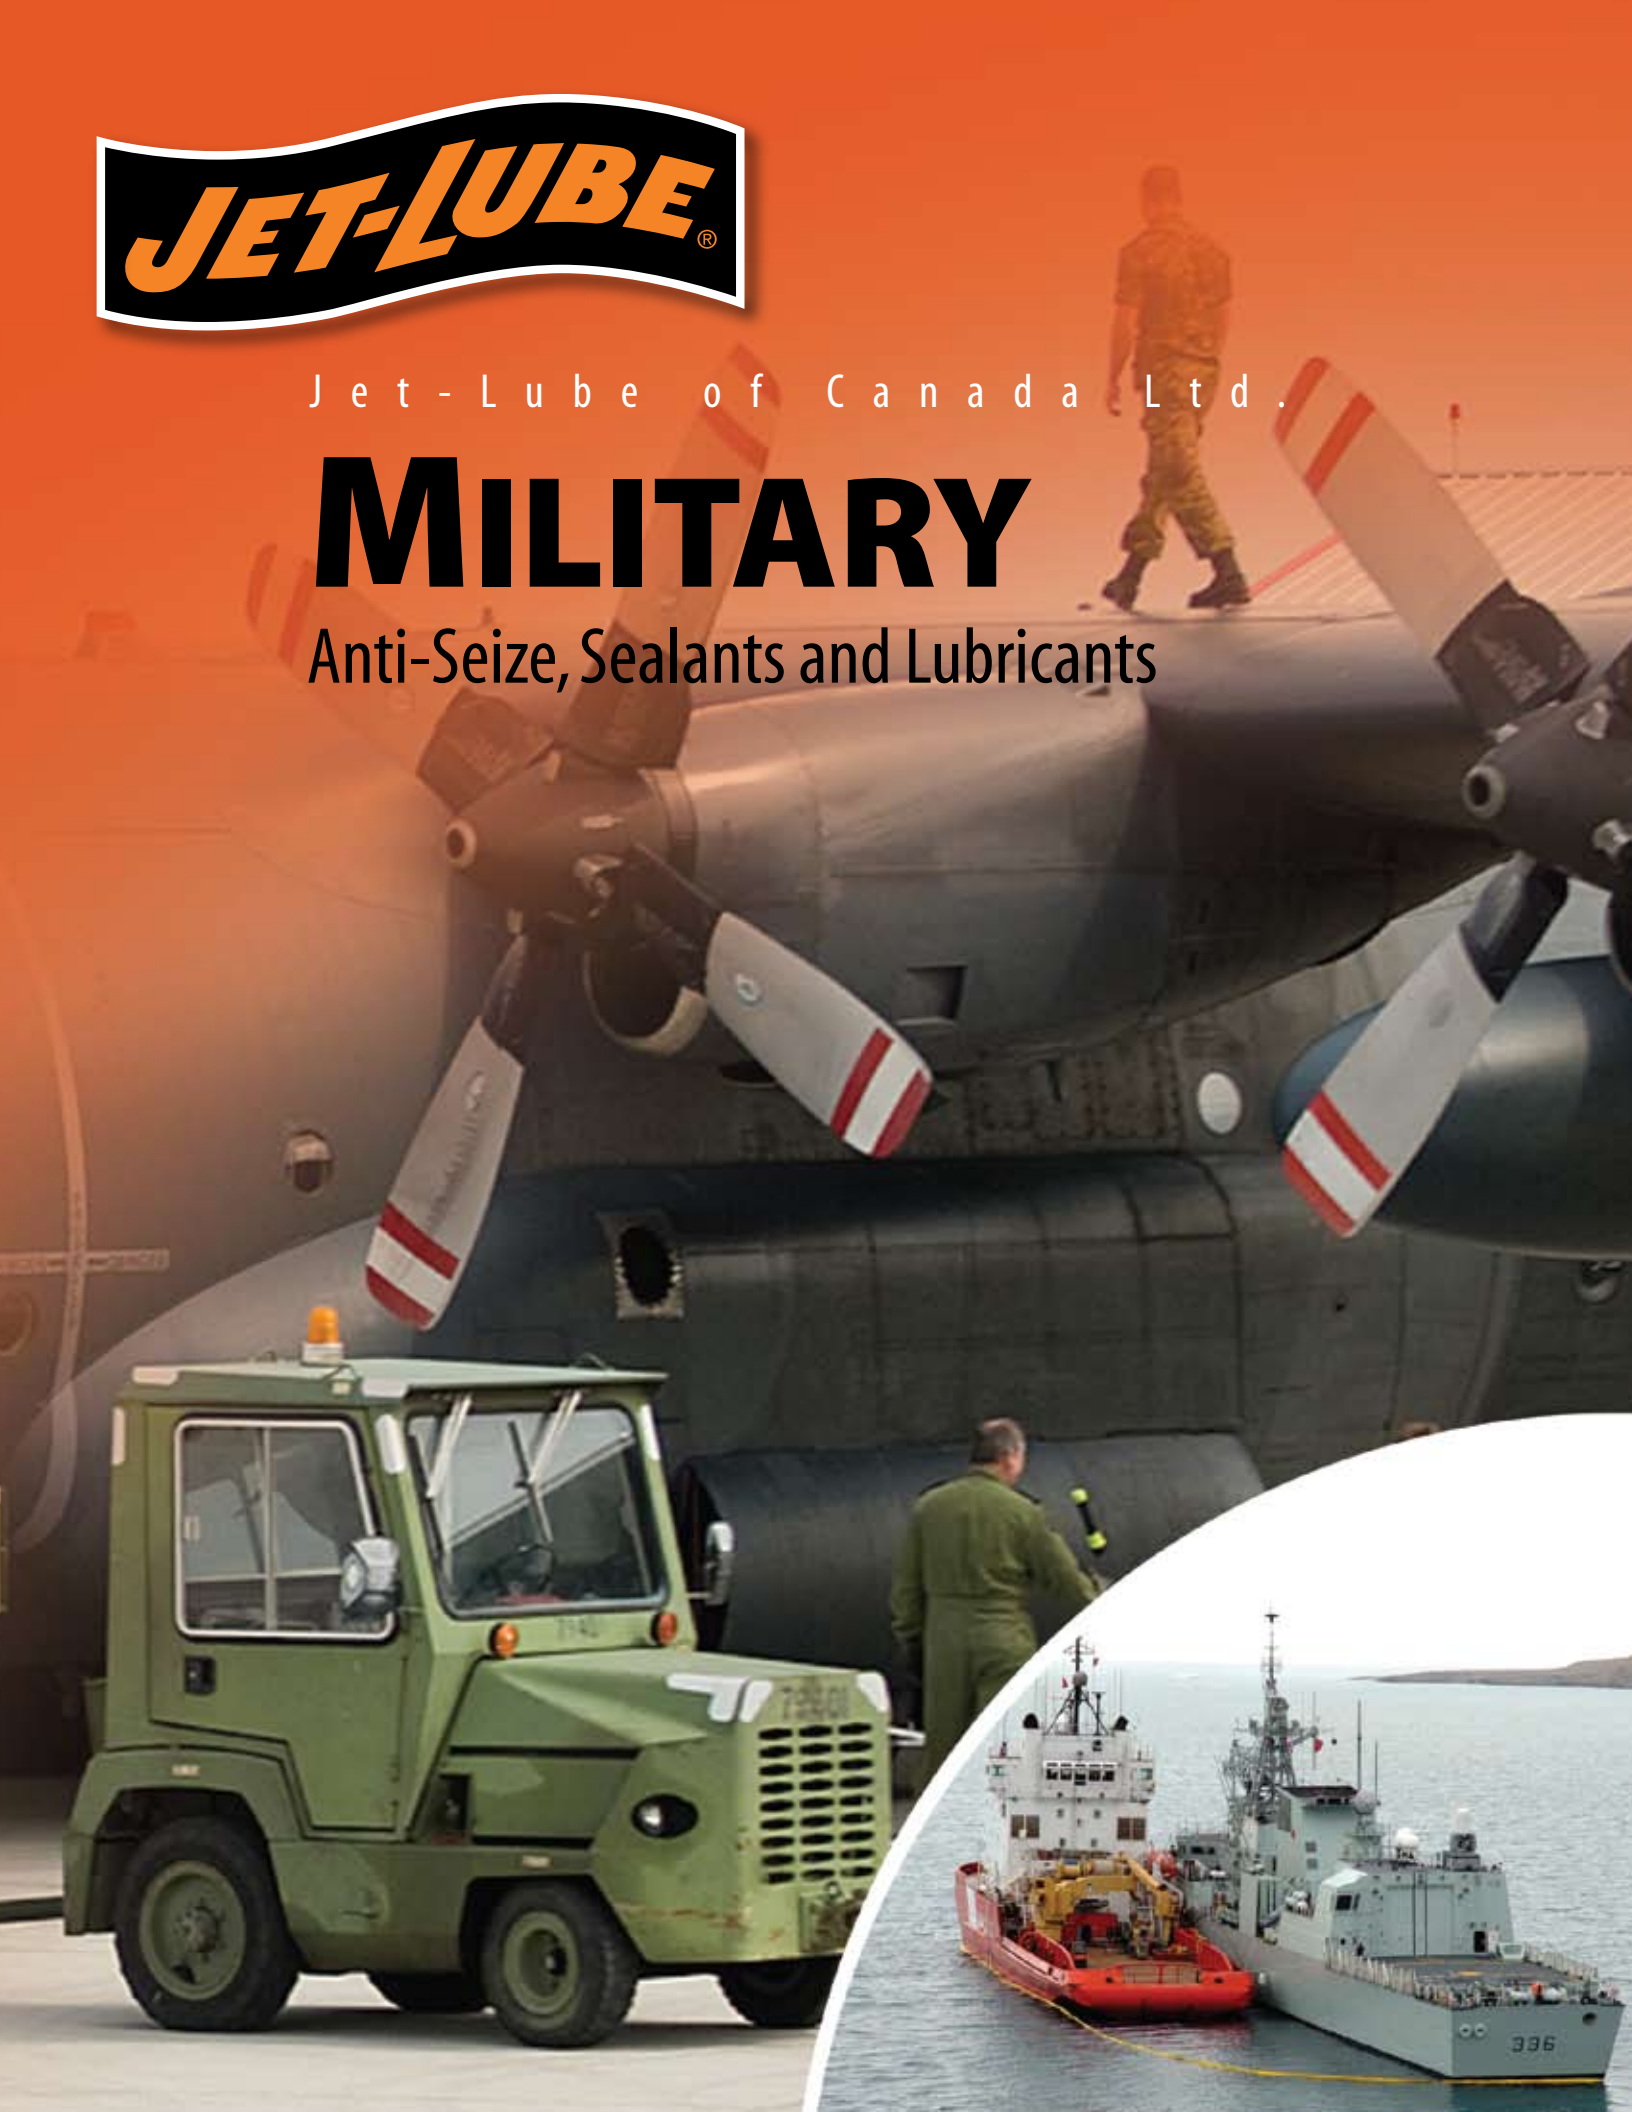



## MILITARY

Anti-Seize, Sealants and Lubricants

### Featured Products

#### ANAEROBICS

**Jet-Lok TL-72** - High Temperature Thread Lock

#### ANTI-SEIZE COMPOUNDS

**550** - Non-Metallic High Temperature

**Graphite Petrolatum**

**Kopr-Kote** - High Temperature

**Moly Petrolatum**

**Nikal** - High Temperature

**SS-30** - High Temperature

**White Knight** - Food Grade

**Zinc Petrolatum**

#### COATINGS

**Rust Guard** - Corrosion Inhibitor

**Z-Plate** - Zinc-Rich Galvanize

#### GREASES

**Alco-EP 73+** - Extreme Service Multi-Purpose

**CC-Lube** - Semi-Synthetic Multi-Purpose Lubricant

**No. 33** - Silicone

**Silicone Compound DM**

#### LUBRICANTS

**12/34** - Lubricant & Penetrant

#### MISCELLANEOUS

**JetPump** - Two Stage  
Hydro-Testing Pump

#### THREAD SEALANTS

**No. 60** - Lead Sealant

**Petro-Tape** - PTFE Tape

**V-2** - Multi-Purpose



## ANAEROBICS

### Jet-Lok® TL-72 High-Temperature Thread Locking Compound



**Operating Range** -55°C to 204°C (-65°F to 400°F)

To be used for high temperature locking applications. Treated parts are locked as well as sealed against leakage, contamination and corrosion. Because of its viscosity, it is more suitable for larger diameter coarse threaded parts. Recommended for parts that do not require routine maintenance, as disassembly would be difficult and may require heat.

SKU #	Size
55566	50 ml tube
55565	225 ml tube

Mil Spec  
**MIL-S-43163A, Type I, Grade L**

## ANTI-SEIZE COMPOUNDS

### 550 Molybdenum Disulphide Anti-Seize Compound



**Operating Range** -54°C to 1316°C (-65°F to 2400°F)

A premium product for a wide variety of applications over a wide temperature range. Can be applied on tubular threads, gaskets, flange faces, slides, fittings, etc. Will protect against seizure, heat freeze, galling, rust and corrosion. Lowers friction and reduces wrench torque. Reduces maintenance costs. Is not affected by contraction, expansion or vibration. Will not, drip or settle out.

SKU #	Size
15502	1/2 lb brush top
15504	1 lb brush top
15523	10 lb pail
15515	150 lb pail

Mil Spec  
**MIL-PRF-907E**

### Graphite Petrolatum Anti-Seize for Aircraft Spark Plugs



**Operating Range** -54° to 482°C (-65° to 900°F)

The intended use of this compound is to prevent seizing during assembly or disassembly of aircraft engine spark plugs and threaded fasteners and fittings at temperatures up to 482°C. Particularly suitable for use in contact with austenitic stainless steel, titanium, nickel and cobalt alloys, and similar corrosion resistant metals and alloys. When used, it should be applied to the spark plug threads only. Must not come into contact with the spark plug terminals or electrodes.

SKU #	Size
27203	500 g plug top

Mil Spec  
**MIL-T-5544C**

### Kopr-Kote HT High Temperature Anti-Seize




**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement). Lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. Has no equal in temperature services up to 815°C (1500°F). **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar

Mil Spec  
**MIL-PRF-907E**

### Moly Petrolatum MoS<sub>2</sub> Anti-Seize Compound



**Operating Range** -54°C to 427°C (-65°F to 800°F)

The intended use of this compound is to prevent seizing during assembly and disassembly of aircraft engine spark plugs and threaded fasteners and fittings at temperatures below 427°C. The ideal anti-seize compound where parts are engaged with components fabricated from either similar or dissimilar metals.

SKU #	Size
26203	1 lb plug top

Mil Spec  
**MIL-PRF-83483C**

## Nikal® Pure Nickel Extreme Temperature Anti-Seize



**Operating Range** -54°C to 1427°C (-65°F to 2600°F)

Premium quality anti-seize and gasket compound, ideal for use in extreme temperatures and hostile environments. Can be applied on items, such as burner tips, manifolds, pipe fittings, furnace hinges, heat exchangers, manhole studs. May be safely used with ammonia, acetylene and vinyl monomers, which are unstable in the presence of copper. Contains no graphite, which is an additional benefit on stainless steel applications. **Note: Not for use on oxygen or LPG lines !**

SKU #	Size
13602	225 ml brush top
13604	1 liter jar
13605	5 liter pail
13615	15 liter pail
13655	55 liter drum

Mil Spec  
**MIL-PRF-907E**

## SS-30™ Pure Copper High Temperature Anti-Seize



**Operating Range** -54°C to 982°C (-65°F to 1800°F)

Specially formulated for stainless steel fittings, protecting them from pitting and breakage. Can be used on threaded and/or flanged connections in internal combustion and jet engines, heat exchangers, furnaces, cat crackers and other high temperature applications.

SKU #	Size
12550	400 g cartridge
12502	225 ml brush top
12504	1 liter jar
12505	5 liter jar
12510	10 liter jar
12555	55 liter keg

Mil Spec  
**MIL-PRF-907E**

## White Knight™ Food Grade Anti-Seize Compound



**Operating Range** -54°C to 982°C (-65°F to 1800°F)

Specifically developed for use in applications where accidental food contact is possible. Protects metal parts from seizure, galling, rust, corrosion and heat freeze by tenaciously adhering to the metal surface. Can be applied on pump gears, valve assemblies, nuts, bolts and screws, chain drives, etc.

SKU #	Size
16402	1/2 lb brush top
16404	1 lb brush top
16423	1-US gal pail



Mil Spec  
**MIL-PRF-907E**

## Zinc Petrolatum Anti-Seize Compound for Aluminium and its Alloys



**Operating Range** -54°C to 420°C (-65°F to 788°F)

The intended use is to prevent seizing during assembly or disassembly of threaded or non threaded components fabricated from aluminium or its alloys, engaged with components fabricated from similar or dissimilar metals. Can be applied on gaskets, flange faces, fasteners, battery connectors, etc.

SKU #	Size
27003	1 lb brush top

Mil Spec  
**CID A-A-59313**  
**(formerly MIL-T-22361 - WEP)**

## COATINGS

### Rust-Guard™ Corrosion Inhibitor



**Operating Range** -30°C to 138°C (-20°F to 280°F)

To be used to provide a long-term protection against rust and corrosion on all metal and alloy surfaces, even under harsh environmental conditions, such as water, high humidity or salt spray. Will fully penetrate into even the smallest crevices to displace moisture.

SKU #	Size
13241	11 oz aerosol
13233	1-US gal can
13235	5-US gal pail
13229	50-US gal drum

Mil Spec  
**A-A-59295 (S/S MIL-PRF-62218B)**  
**and MIL-PRF-16173E, Grade 1 & 2**



## Z-Plate™ Zinc-Rich Galvanize



**Operating Range** -185°C to 400°C (-300°F to 750°F)

Excellent product for cosmetic repairs of welded joints, storage tanks, pipelines, heat ducts, etc. Provides the protection of hot-dip galvanizing plus the convenience of on-the-job aerosol application. Protects against rust, rust spreading and corrosion.

**SKU #** 60541  
**Size** 340 g aerosol

**Mil Spec**  
**MIL-P-46105, MIL-P-12035 and DOD-P-21035A**

## GREASES

### Alco-EP-73 Plus™ Premium Water Resistant Extreme Service Multi-Purpose Grease



**Operating Range** -32°C to 230°C (-25°F to 450°F)

Specially formulated and developed for conditions where extreme water resistance is necessary. Can be used in applications where tolerances are low and/or speeds are high. Provides superior rust and corrosion protection for maximum service life under harsh conditions.

**SKU #** 37750 14 oz cartridge  
37716 35 lb pail  
37724 120 lb keg  
37729 400 lb drum

**Mil Spec**  
**(Exceeds) MIL-G-18458B-SH**

### CC-Lube™ Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant



**Operating Range** -18°C to 204°C (0°F to 400°F)

A clean, clear, colorless, non-staining, non-drying and biodegradable lubricant that may be safely used on a variety of surfaces, including metal, plastic, rubber, vinyl, nylon and stainless steel in a multitude of applications. Unsurpassed in reducing friction; extends machine and equipment life and prevents the formation of rust and corrosion over a broad temperature range.



**SKU #** 70550 14 oz cartridge  
70623 1-US gal pail  
70516 35 lb pail  
70524 120 lb keg  
70529 400 lb drum

**Mil Spec**  
**SAE-AMS-G4343 (S/S MIL-G-4343C) and NATO G392**

### No. 33 Lithium Soap Thickened Silicone Grease



**Operating Range** -57°C to 204°C (-70°F to 400°F)

Excellent for use on ball and roller bearings under light loads, for use on plastic and rubber parts and for use on small gears and applications requiring an oxidation resistant lubrication. Especially effective in equipment that must start in extremes of cold.

**SKU #** 73850 14 oz cartridge  
73824 120 lb keg

**Mil Spec**  
**CID A-A-59173 (formerly MIL-G-46886B), SAE-AMS-G-4343 (formerly MIL-G-4343, XG 261 and G394/XG315)**

### Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



**Operating Range** -57°C to 204°C (-70°F to 400°F)

To be used as protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

**SKU #** 73560 5-oz tube  
73503 450 ml plug-top  
73504 1 liter jar  
73550 14 oz cartridge  
73506 5 lb pail  
73522 10 lb pail  
73516 35 lb pail  
73524 120 lb keg  
73529 400 lb drum

**Mil Spec** **MIL C-21567A (DM-2) MIL S-8660C (DM-3)**

## LUBRICANTS

### 12/34 Lubricant and Penetrant



Operating Range -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture, prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

Mil Spec

**MIL-C-23411**

## MISCELLANEOUS

### JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## THREAD SEALANTS

### No. 60™ Lead Seal Compound



Operating Ranges -18°C to 315°C (0°F to 600°F)  
Pressures to 41,000 kPa (6,000 psi)

Can be used in a wide variety of piping systems, including oil, steam, chemicals, refrigerants and petroleum applications. May be used on a variety of surfaces, such as steel, brass, copper, cast iron, plastics, fiberglass and aluminum. Lubricates and seals threaded connections on pipe, fittings, bolts, nuts, screws, and for flange faces and gaskets. Pressures up to 6,000 Psi

SKU #	Size
26702	225 ml brush top
26704	1 liter jar
26705	5 liter pail

Mil Spec

**MIL-A-907E**

### Petro-Tape PTFE Thread Seal Tape



Operating Range -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed for sealing metal threaded pipe connections not exceeding 3" for natural gas and methane, gasoline, petroleum oils, propane and butane.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

Mil Spec

**CID A-A-58092**

**(formerly MIL-T-27730A)**



## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Ranges** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fiberglass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc., (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases.

**SKU #** **Size**  
22002 225 ml brush top  
22004 1 liter jar  
22005 5 liter pail  
22010 10 liter pail  
22055 55 liter keg

**Mil Spec**  
**MIL-TT-S-1732**  
**NATO S-716**

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye

### C

CableLube

CB-2

CC-Lube

Clean-Up

Clean-Up Plus

Creeper-Lube

### E

Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize

Eco-Safe

EMS

Enviro-Guard

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG

Food Grade Silicone

### G

Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000

Jacking System Grease ECF

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter

MP-50

### N

NCS-30

NCS-30 ECF

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF

Rust Guard

### S

Seal Guard

Seal-Guard ECF

Sheen Free

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff

### U

Ultra

### V

V-2

### W

Well-Guard

White Knight

White Lithium

Wire Line Lubricant ECF

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775

Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449

Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)

[www.jetlubecanada.com](http://www.jetlubecanada.com)

Vice President & General Manager

Gary McCormick

[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

National Sales & Marketing Manager:

Jim McLaws

[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

Technical Service:

Neil Ruel

[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

Inside Sales:

Maleena Carreiro

[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)

Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.








J e t - L u b e o f C a n a d a L t d .

# MINING & DRILLING EXPLORATION

Anti-Seize, Sealants and Lubricants

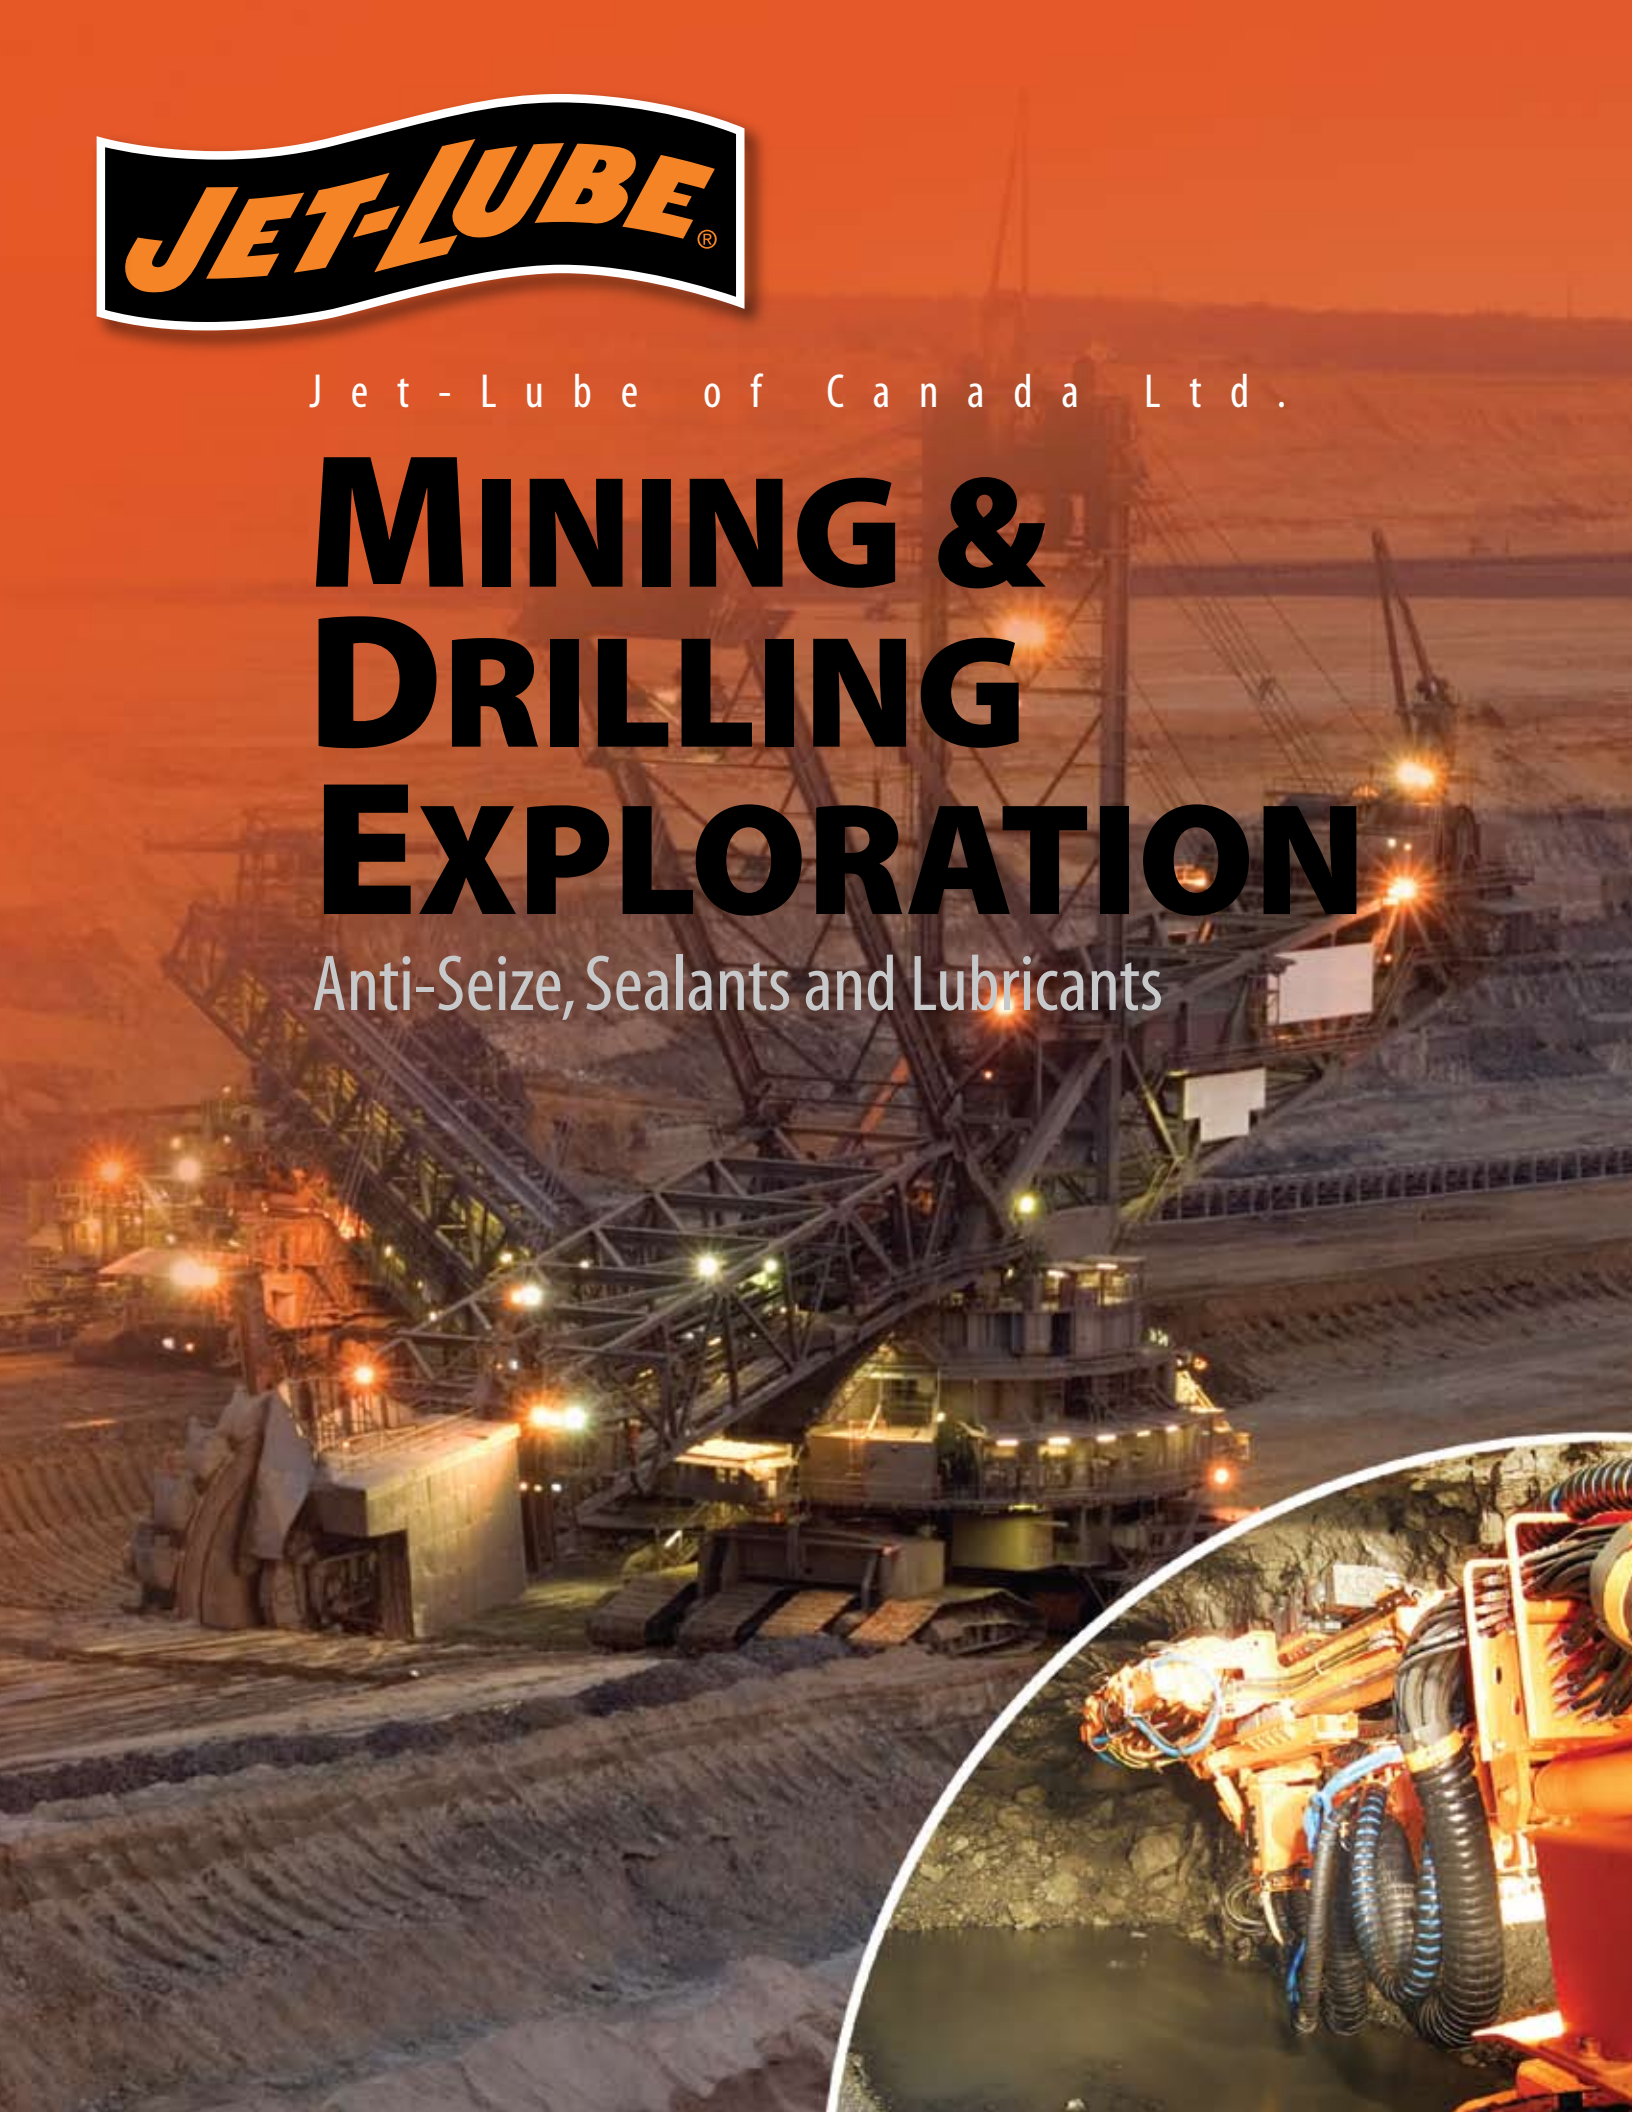





# MINING & DRILLING EXPLORATION

Anti-Seize, Sealants and Lubricants

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**Alco-EP** - Premium Multi-Purpose Grease

**Alco-EP 73+** - Premium Water Resistant Grease

**CableLube** - Wire Rope and Chain Lubricant

**Clean-Up Plus** - Organic Solvent Cleaner and Degreaser

**EP Bearing Grease** - Extreme Pressure Multi-Purpose Grease

**J-75** - Lead Free Drill Steel Lubricant

**J-89** - Lead Free Drill Steel Lubricant

**JetPump** - Two-Stage Test and Injection Pump

**Kopr-Kote HT** - High Temperature Anti-Seize

**Magic Wrench** - Super Penetrant

**OG-H** - Open Gear Lubricant

**Petro-Tape** - PTFE Thread Seal Tape

**RD-N** - High Performance Synthetic Rock Drill Oil

**RD-P** - Percussion Rock Drill Oil

**RuFF** - Heavy-Duty Rust and Corrosion Inhibitor

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**V-2** - Multi-Purpose PTFE Thread Sealant



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture; prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of industrial applications. Provides superior wear protection against extreme pressure and is highly water resistant. Alco-EP has a 60 pound rating in the TIMKEN load test, which indicates that it has an excellent load-carrying ability.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37055	120 lb keg
37029	400 lb drum

## Alco-EP-73 Plus™ Premium Water Resistant Grease



**Operating Range** -32°C to 230°C (-25°F to 450°F)

Specially formulated and developed for conditions where extreme water resistance is necessary. Can be used in applications where tolerances are low and/or speeds are high. Provides superior rust and corrosion protection for maximum service life under harsh conditions.

SKU #	Size
37750	37750
37716	37716
37724	37724
37729	37729

## CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

**Today's no. 1 wire rope lubricant and penetrant.** When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

## Clean-Up Plus™ Organic Solvent Cleaner & Degreaser



**29 KV dielectric strength**

Specially formulated and designed to quickly dissolve and rinse away dirt, grease, grime, oil, tar and wax, while being both environmentally safe and ozone friendly. Ideal for a wide range of industrial cleaning applications, such as tools, chains, machine parts, electric motors, forklifts, bearings, etc. Safe on all metals and most plastics.

SKU #	Size
72542	15 oz aerosol
72535	5-US gal pail

## EP Bearing Grease™ Extreme Pressure Multi-Purpose Grease



**Operating Range** -18°C to 165°C (0°F to 325°F)

Specially formulated for use on roller bearings, anti-friction bearings and journals, and is particularly useful where a single, multi-purpose product is desirable. This grease has a multitude of applications, where an exceptionally high quality, multi-purpose lubricant is required. Is water resistant, highly tenacious and has excellent resistance to the effects of salt spray, heat, water, oxidation, high loads and other adverse conditions common to industrial/mining usage.

SKU #	Size
30350	14 oz cartridge
30316	35 lb pail
30324	120 lb keg

## J-75® Lead Free Drill Steel Lubricant



**Operating Range** -18°C to 260°C (0°F to 500°F)

Recommended for percussion rock drilling, blast hole drilling, road construction, logging, mining, coal drilling, pneumatic and tract drilling. Being brushable, it provides positive protection to 260°C (500°F) and will not run out of hot threads. The superior anti friction properties reduce thread wear and lengthen steel and coupling life. J-75 is lead free.

SKU #	Size
24812	2-US gal pail

## J-89™ Lead Free Drill Steel Lubricant



**Operating Range** -18°C to 232°C (0°F to 450°F)

Recommended for percussion rock drilling, blast hole drilling, road construction, logging, mining, coal drilling, pneumatic and tract drilling. Being pumpable, it provides positive protection to 232°C (450°F) and will not run out of hot threads. The superior anti friction properties reduce thread wear and lengthens steel and coupling life. J-89 is lead free.

SKU #	Size
24415	5-US gal pail

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Kopr-Kote HT High Temperature Anti-Seize



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar



## Magic Wrench® Super Penetrant



**Operating Range** -51°C to 177°C (-60°F to 350°F)

Attacks rust and corrosion quickly and safely, in order to free corroded parts, loosen nuts and assist in the disassembly of mechanical components. Is safe on all metals and plastics. Ideal product for the lubrication and conditioning of air tools.

SKU #	Size
39541	13 oz aerosol
39533	1-US gal jug
39535	5-US gal jug



## OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on exposed gears of all types, on steam and power winches, hoists, mill and forge equipment, construction machinery, power shovels and dredges, shovel gears, pulverizers, bull gears, etc. Can be applied on the bearings in slow moving equipment wherever high unit pressures occur. OG-H has excellent "stay put" qualities, will not melt or throw-off and is ideal for use at high temperatures, where other lubricants become runny or drip off.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC listed for sealing metal threaded pipe connections not exceeding 3".

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## RD-N™ Synthetic Rock Drill Oil



**Operating Range** -32°C to 220°C (-25°F to 430°F)

Recommended for all pneumatically operated rock drill oils used in monitoring or environmentally sensitive drilling applications. Provides state-of-the-art lubrication for all makes of pneumatic percussion tools under severe conditions. RD-N is environmentally safe and undetectable to maintain site integrity. Exceeds the stringent test specifications and guideline, as specified in the EPA 8010, EPA 8240 and EPA 8270 guidelines.

SKU #	Size
18033	1-US gal pail
18035	5-US gal pail

## RD-P™ Percussion Rock Drill Oil



**Operating Range** -18°C to 205°C (-0°F to 400°F)

Designed to lubricate percussive drilling equipment such as hydraulic or pneumatic drills, hammers, bits, etc. In use, it will coat the walls and internal components of rock drilling equipment, providing a protective film that prevents rust and corrosion, when the equipment is not in use.

SKU #	Size
18215	15 liter pail

## RuFF Heavy-Duty Rust & Corrosion Inhibitor



### Operating Ranges

RuFF 21 Bulk	-2°C to 60°C (28°F to 140°F)
RuFF 9 Bulk & Aerosol	-40°C to 60°C (-40°F to 140°F)

Formulated to act as a high performance corrosion inhibitor that tenaciously adheres to all metals. Offers superior protection against water, salt water spray, calcium and chloride, oxidation and other harsh conditions. Ideal for use on vehicles, mining trucks and trailers, and as a protective undercoating.

SKU #	Size
RuFF 21	
144120	20 liter pail
144175	205 liter drum

RuFF 9	
199120	20 liter pail
199175	205 liter drum

RuFF 9	
199141	340 g aerosol

## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



Operating Range -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



Operating Range -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## V-2™ Multi-Purpose PTFE Thread Sealant



Operating Ranges -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, fiberglass, etc. Recommended for threaded pipes carrying air, diesel fuel, natural gas, etc. (specifications of various mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg



## Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	<b>O</b>	<b>T</b>
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	<b>K</b>		TF-500
<b>A</b>	Ezy-Pak 125	Kiln Grease	<b>P</b>	TFW
Alco EP	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco-EP ECF 	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP 73 Plus	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	<b>U</b>
AP-1 White	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	Ultra
AP-5	Ezy-Turn 5		Powr-Kote	
API-Modified Arctic	Ezy-Turn 6	<b>L</b>	PS Terminal	<b>V</b>
API-Modified	Ezy-Turn 8	Lapping Oil		V-2
Arctic Grease	Ezy-Turn 12	LBX -Special	<b>R</b>	
AX-2	Ezy-Turn 14	Lite Knight	RD-N	
	Ezy-Turn 22		RD-P	<b>W</b>
	Ezy-Turn Body Fill	<b>M</b>	Renew	Well-Guard 
<b>B</b>	Ezy-Turn H <sub>2</sub> S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
<b>C</b>		Marine MP	RuFF 21	WLD
CableLube	<b>F</b>	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	<b>Z</b>
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up	<b>G</b>	Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	Gear-Guard	Moly-Arc	<b>S</b>	Zinc Petrolatum
Creeper-Lube	Graphite Petrolatum	MotherCutter 	Seal Guard	
<b>E</b>		MP-50	Seal-Guard ECF 	
Easy-Clean	<b>J</b>		Sheen Free 	
Easy-Clean Liquid	J-75	<b>N</b>	Silicone Compound DM	
ECF Anti-Seize 	J-89	NCS-30	Silicone Spray	
Eco-Safe 	JL-5000 	NCS-30 ECF 	Silver Plus	
EMS 	Jacking System Grease ECF 	Nikal	SS-30	
Enviro-Guard 	Jet-Lok PS-50	Nikal Nuclear		
Enviro-Safe	Jet-Lok PS-67	No. 33		
EP Bearing Grease	Jet-Lok TL-72	No. 60		
Extreme	Jet-Lube 21	Nuclear Nonmetallic		



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.






J e t - L u b e   o f   C a n a d a   L t d .

# OIL & GAS

Anti-Seize, Sealants and Thread Compounds

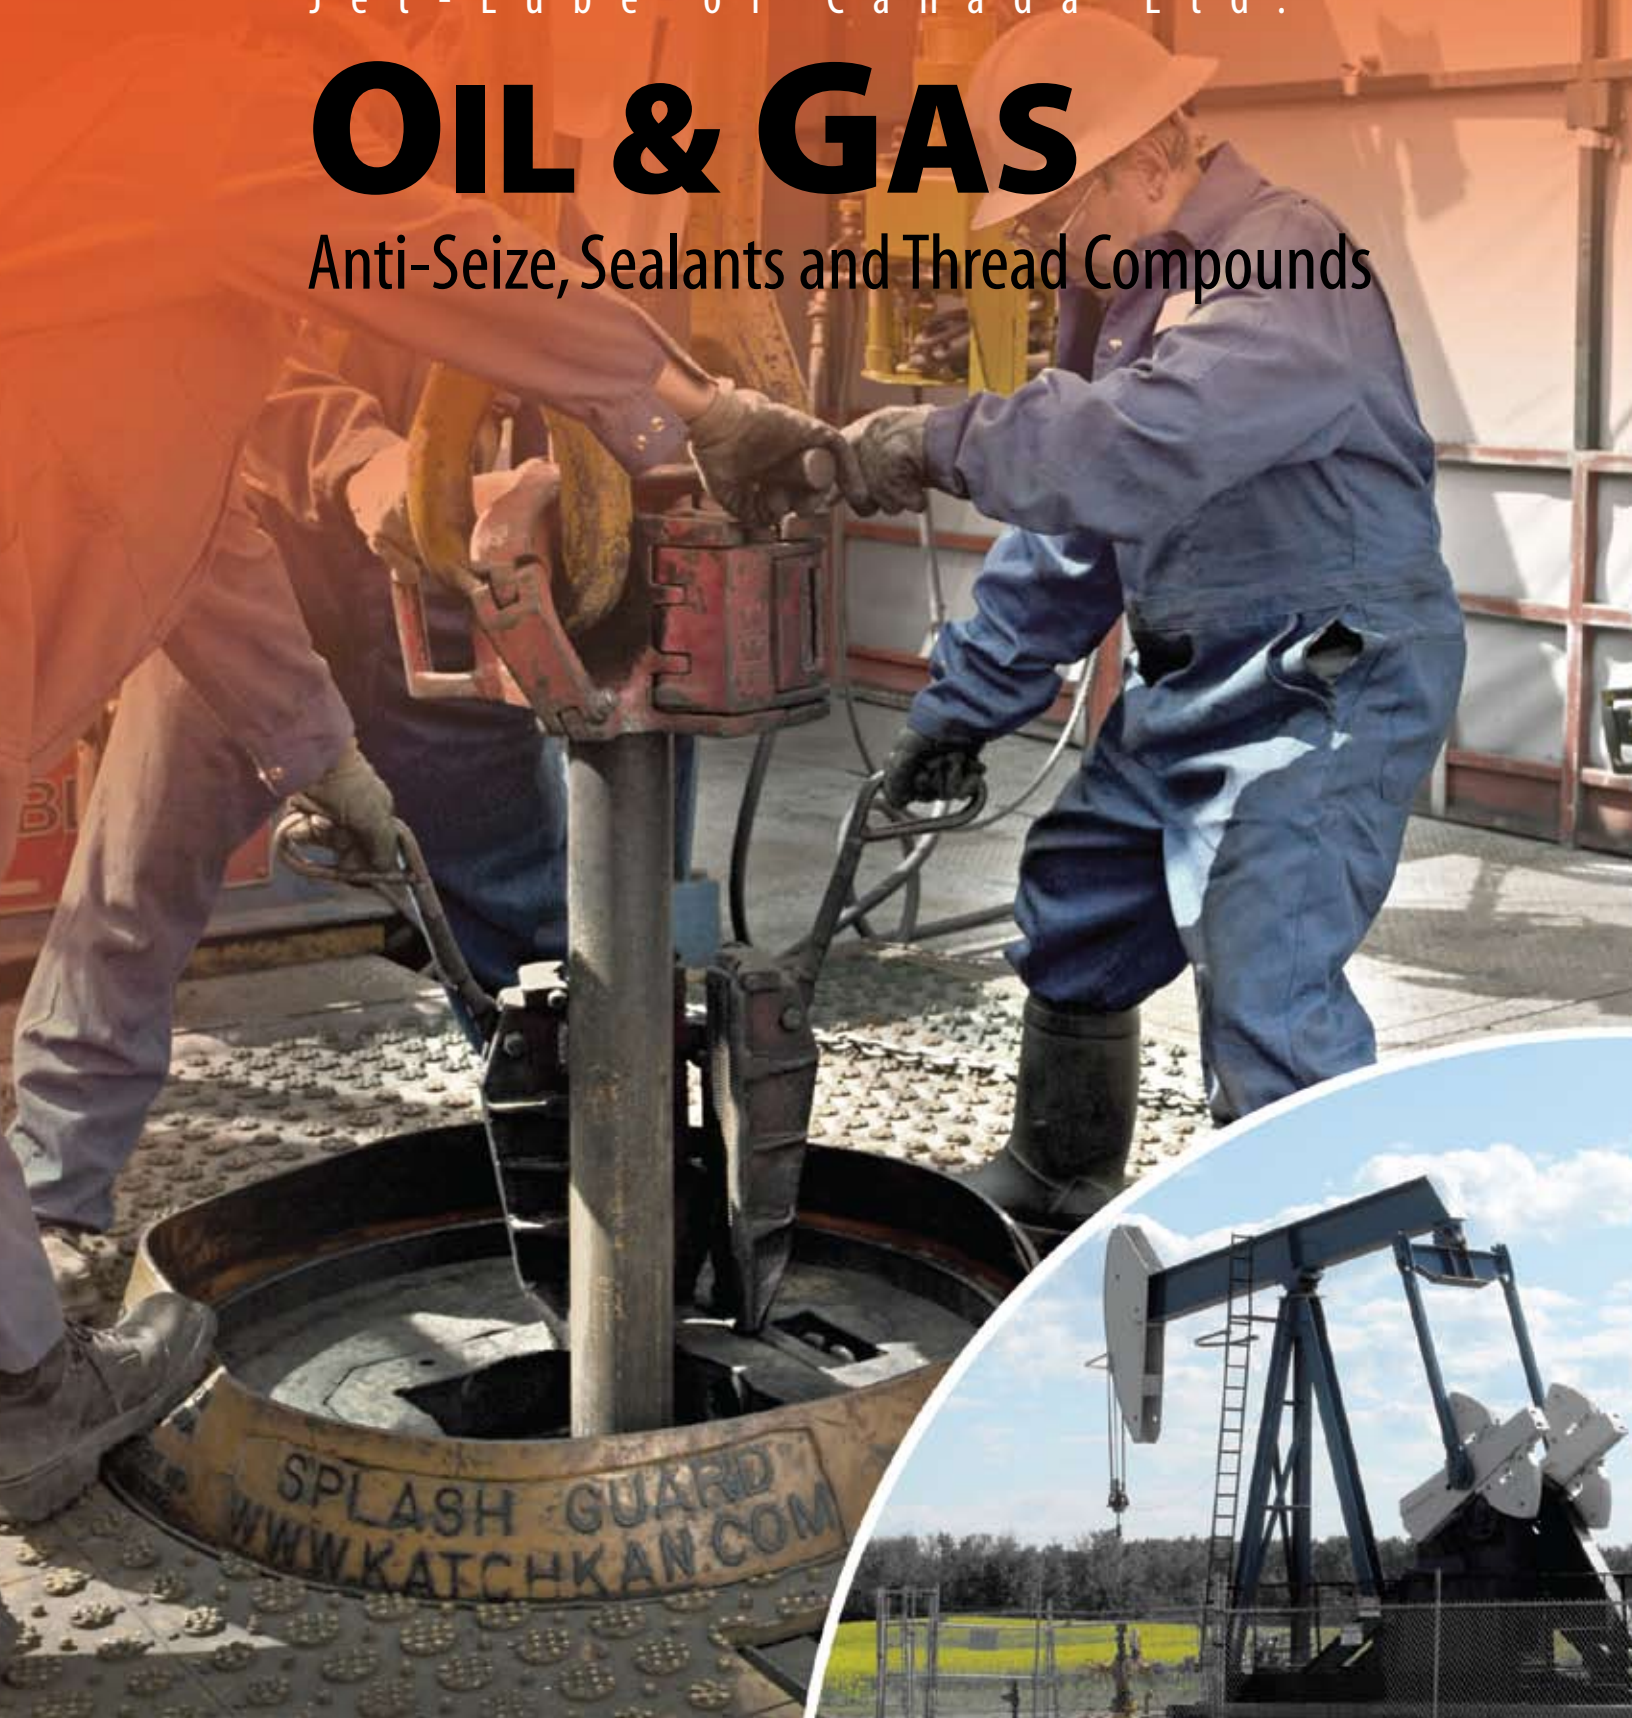





# OIL & GAS

Lubricants, Anti-Seize & Thread Compounds

## Featured Products

### DRILLING COMPOUNDS

**Extreme** - Drill Collar and Drill Pipe  
**Kollar King®** - Drill Collar  
**Kopr-Kote®** - Drill Collar and Drill Pipe  
**Kov'r-Kote®** - Drill Pipe  
**LBX-Special®** - Tool Joint  
**NCS-30** - Drill Collar and Drill Pipe  
**NCS-30 ECF** - Drill Collar and Drill Pipe  
**Pow'r-Kote®** - Drill Collar and Drill Pipe  
**Z-50™** - Drill Pipe

### PRODUCTION COMPOUNDS

**API-Modified** - Thread Compound  
**Run-N-Seal®** - Thread Compound  
**Seal-Guard® ECF™** - Premium Connection Compound  
**TF-15™** - Thread Sealant

### STORAGE COMPOUNDS

**Korr-Guard™** - Storage Compound  
**RuFF** - Heavy-Duty Rust & Corrosion Inhibitor  
**Rust-Guard™** - Corrosion Inhibitor

### ANTI-SEIZE COMPOUNDS

**550®** - Molybdenum Disulphide Anti-Seize Compound  
**Kopr-Kote®** - High Temperature Anti-Seize  
**Nikal®** - Pure Nickel Extreme Temperature Anti-Seize

### THREAD SEALANTS

**Petro-Tape** - Pure Virgin PTFE Thread Seal Tape  
**TF-15™** - Thread Sealant

### EP GREASES

**Alco-EP™** - Premium Multi-Purpose  
**AP-5™** - High Temperature with Molybdenum Disulphide  
**Arctic™** - Low Temperature Service

### LUBRICANTS

**CableLube** - Wire Rope & Chain  
**Gear-Guard™** - Open Gear  
**Silicone Spray** - Industrial Grade Lubricant  
**OG-H™** - Open Gear  
**WLD™** - Wire Line Dressing

### PENETRANTS & CLEANERS

**12/34 Formula™** - Lubricant and Penetrant  
**Clean-Up™** - Industrial Cleaner and Solvent  
**Easy-Clean® (Powder)** - Concentrated Detergent Rig Wash  
**Easy-Clean® (Liquid)** - Alkaline Cleaner and Degreaser  
**PS Terminal™** - Electrical Contact Cleaner

### HYDRO-TESTING PUMP

**JetPump** - Two-Stage Pump



# DRILLING COMPOUNDS

## Extreme Drill Collar and Drill Pipe Compound



**Operating Range** -18°C to 232°C (-0°F to 450°F)

This mud resistant drill collar and drill pipe compound is a premium quality, unleaded compound containing copper flake, graphite and other natural extreme pressure and anti-wear additives. These are blended into JET-LUBE's newest high temperature complex base grease. EXTREME has been designed to utilize the makeup charts in API RP 7G. In the more severe drilling situations such as higher speeds, higher penetration rates, deviated holes or harder formations, drill collars and/or standard rotary shouldered connections should be made up 20% over the listed RP 7G values. This may also be a consideration for premium threaded connections.

SKU #	Size
11415	5-US gal pail
11423	1-US gal pail

## Kollar King® Drill Collar Compound



**Operating Range** -18°C to 205°C (0°F to 400°F)

Formulated specifically for use on drill collars and in other high pressure applications where a lead base compound is preferred. Provides leak-free joints, withstands extreme pressure, is strongly corrosion resistant and prevents galling and seizure and prolongs thread life. Contains 60% pure metallic lead and our extreme pressure additive CZ-EX® to provide additional shock resistance.

SKU #	Size
26505	5 liter pail
26520	20 kg pail

## Kopr-Kote® Copper/Graphite Drill Collar and Drill Pipe Compound



**Operating Range** -18°C to 205°C (0°F to 400°F)

An unleaded, premium quality compound containing copper flake, graphite, CZ-EX®, rust and corrosion inhibitors, antioxidants, and other natural extreme pressure and anti-wear additives. The highly refined, low pour point oil used in the production of our grease ensures brushability at low temperatures as well as the necessary oxidation and thermal stability at high temperatures. It has superior adhesion to wet steel surfaces and resistance to water wash-off. Provides positive protection for rotary shouldered connections under severe drilling conditions where the probability of downhole make-up is anticipated.

SKU #	Size
10105	5 liter pail
10110	10 liter pail
10115	15 liter pail
10155	55 liter keg
10175	205 liter drum

## Kov'r-Kote® Drill Pipe Compound



**Operating Range** -18°C to 205°C (-0°F to 400°F)

Based on the same patented polymer chemistry used to develop Pow'r-Kote®, KOV'R-KOTE is an economical, multifunctional, nonmetallic thread compound.

Formulated with a patented blend of high-tech polymers, graphite and other non-metallic additives as an environmentally preferred alternative to compounds containing heavy metals. Kov'r-Kote is a multi-functional compound that can be used on both shouldered and interference threaded connections. Extreme pressure and anti-wear additives lock together to resist galling, seizure and downhole makeup.

SKU #	Size
13915	15 liter pail

## LBX-Special® Tool Joint Compound



**Operating Range** -18°C to 205°C (-0°F to 400°F)

Truly a double duty tool joint compound, can be used throughout the entire drill string - 'from the swivel to the bit' - on tool joints, drill collars, and all subsurface tools in medium drilling conditions to depths of 3,000 meters. A premium lead and zinc free tool joint compound which contains copper flake as the only metallic component. Fortified with a unique blend of natural, inorganic, extreme pressure additives. Finest drill pipe compound when downhole conditions are severe. Ideal for use in deep holes, high angle holes, problem holes, whip stocks, and horizontal holes.

SKU #	Size
11010	10 liter pail
11015	15 liter pail
11055	55 liter keg

## NCS-30® Nonconductive Thread Compound



**Operating Range** -29°C to 260°C (-20°F to 500°F)

A nonconductive anti-seize compound that was developed to create a wear-resistant film on metal surfaces, and has been engineered for high-chrome or nickel alloys. Extreme pressure and anti-wear additives are blended into the base grease, which has excellent adhesion to wet or oily threaded surfaces.

Maintenance related problems can be eliminated with NCS-30. The blend of friction reducing agents eliminates the metal-to-metal contact, which dramatically reduces the potential for galling.

SKU #	Size
16914	3 ½-US gal pail

## NCS-30® ECF™ Drill String Compound



**Operating Range** -23°C to 260°C (-10°F to 500°F)

A nonconductive thread compound containing polymeric fibers and additives and other natural extreme pressure and anti-wear additives, blended into a high temperature calcium complex base grease. Designed with a focus on environmental concerns, contains no metals, is biodegradable, non bio-accumulative and non-toxic.

Brushable at low temperatures, it also has the necessary oxidation and thermal stability at high temperatures. Superior adhesion to wet steel surfaces, resistance to water wash-off, and superior rust and corrosion protection. Nonconductive for MWD applications, it provides excellent performance on high chrome or nickel alloys. Especially effective for inverted or high pH muds.

SKU #	Size
23715	20 kg pail



## Pow'r-Kote® Drill Collar and Drill Pipe Compound



**Operating Range** -18°C to 205°C (0°F to 400°F)

A new-generation, premium drill collar and drill pipe compound, formulated from a patented blend of non-metallic, environmentally acceptable ingredients. Recommended for the most extreme drilling conditions, including invert and geothermal wells, high angle holes, extended reach, sidetrack, re-entry and horizontal drilling applications. Prevents excessive circumferential make-up and assures shoulder faces mate completely without stand-off or deformation. Use on drill collars and drill pipes in extreme downhole conditions. Exceeds industry performance and environmental compliance standards.

SKU #	Size
15705	5 liter pail
15710	10 liter pail
15715	15 liter pail

## Z-50™ Drill Pipe Compound



**Operating Range** -18°C to 205°C (0°F to 400°F)

The finest metallic zinc compound on the market today. It is specially formulated and tested to insure the best brushability and maximum protection under the widest temperature ranges. Significantly reduces stresses within tool joints, compared to a typical zinc compound. Z-50 contains a proprietary binder that dramatically increases the compound's ability to reduce friction and thus retard make-up, yet maximizes the plating of metallic zinc in the joints. Contains 50% prime grade pure metallic zinc along with special additives which prevent the zinc from plating onto the tool joint threads and shoulders. Provides maximum protection of tool joint threads and shoulders over a wide variety of service conditions.

SKU #	Size
20408	8 kg pail
20414	15 kg pail
20425	25 kg pail



## PRODUCTION COMPOUNDS

### API-Modified Thread Compound



**Operating Range** -18°C to 205°C (0°F to 400°F)

Formulated to ensure brushability over a wide temperature range, tenacious adherence to thread surfaces, resistance to water washout, and the prevention of rust and corrosion. It is conductive, which reduces the possibility of electrolytic corrosion by preventing the formation of galvanic cells in the presence of salt water and other corrosive fluids.

Seals and withstands pressures to 69,000 kPa (10,000 psi) and will not harden or dry. Reduces friction in the makeup of casing and tubing, preventing galling and wear. Maximum thread engagement is ensured, providing optimum leak resistance.

Specially formulated for use on casing, tubing, line pipe, flow lines, subsurface production tools, and tank batteries. It will lubricate, seal and protect threaded connections of oilfield tubular goods on makeup, in service, and in storage.

SKU #	Size
22109	9 kg pail
22114	15 kg pail
22125	25 kg pail

### Run-N-Seal® Thread Compound



**Operating Range** -18°C to 205°C (0°F to 400°F)

A high pressure thread sealing compound containing graphite as well as other nonmetallic, inorganic and anti-wear additives, all of which are blended into a high quality aluminum stearate grease base that ensures that the compound will stick to wet steel and will not wash off the threads. The lubricating and anti-seize characteristics control friction in the make-up of casing and tubing, preventing galling and wear.

For use where a totally metal-free compound is preferred as an alternative to API-Modified. Recommended for use on casing, tubing, line pipe, flow lines, subsurface production tools, and tank battery installations.

SKU #	Size
17002	225 ml brush top
17004	1 liter jar
17005	5 liter pail
17010	10 liter pail
17015	15 liter pail

### Seal-Guard® ECF™ Premium Thread, Tubing and Casing Compound



**Operating Range** -29°C to 204°C (-20°F to 400°F)

The advanced base grease is a carefully selected balance of synthetic and vegetable oils with our "Extreme" base grease thickener technology coupled with innovative solid lubricants. The result is superior lubrication under high loads with galling resistance equivalent to heavy metal-based compounds in a totally metal free formulation. The cutting edge technology provides a high affinity to metal surfaces with relatively low added-solids content.

Specifically formulated to meet the performance requirements of proprietary, metal-to-metal seal and high-interference connection designs utilizing today's high-performance materials, which include "super" chrome and high-alloy steels.

SKU #	Size
20915	20 kg pail
20923	4 kg pail
20929	204 kg drum



### TF-15™ Thread Sealant



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Contains, reprocessed PTFE fluorocarbon resin and molybdenum disulphide ( $\text{MoS}_2$ ) in a high-melting, high temperature grease base. It is further fortified with inhibitors for rust, corrosion and oxidation. Its lubricating and sealing properties will prevent thread leaks of fluids, gases or steam.

Recommended for all critical tubular components from non-precision, loose and worn threads to high precision threads, particularly those subjected to impact or rough handling upon makeup. Formulated to aid in the make-up of large diameter casing. Provides excellent protection against galling and wear, seals badly worn threads, and greatly increases connection life.

Use as a sealant on fiberglass tubing and casing threads. Particularly useful in  $\text{H}_2\text{S}$  and salt water environments and in applications subject to vibration, pressure surge and temperature fluctuations.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

## STORAGE COMPOUNDS

### Korr-Guard™ Storage Compound



**Operating Range** -40°C to 149°C (-40°F to 300°F)

A water displacing, specialized formula utilizing a unique approach to rust and corrosion resistance. KORR-GUARD actually complexes a high quantity of rust inhibitor as a component in the thickener. The thickener holds the rust inhibitor in place so additive depletion becomes a less significant factor in long term storage. Used to protect equipment and threaded pipe ends against rust and corrosion.

SKU #	Size
78823	1-US gal pail
78816	5-US gal pail
78828	50-US gal drum

### RuFF - Rust Free Film Heavy-Duty Rust & Corrosion Inhibitor



**Operating Ranges**  
RuFF 21 -2°C to 60°C (28°F to 140°F)  
RuFF 9 -40°C to 60°C (-40°F to 140°F)

Formulated to act as a high performance corrosion inhibitor that tenaciously adheres to all metals. Offers superior protection against water, salt water spray, calcium and chloride, oxidation and other harsh conditions. Ideal for use on vehicles, trucks and trailers, and as a protective undercoating.

SKU #	Size
RuFF 21	
144120	20 liter pail
144175	205 liter drum

RuFF 9	
199120	20 liter pail
199175	205 Liter drum
199141	340 g aerosol

### Rust-Guard™ Corrosion Inhibitor



**Operating Range** -30°C to 138°C (-20°F to 280°F)

Provides a long-term protection on metal and alloy surfaces from rust and corrosion for a variety of applications. When applied, it will not crack or flake off and, since it is applied in aerosol or liquid form, it penetrates fully into even the smallest crevices to displace moisture and prevent rust and corrosion. Meets MIL-PRF-16173E (Grade 1 & 2).

SKU #	Size
13241	11 oz aerosol
13233	1-US gal can
13235	5-US gal pail
13229	50-US gal drum



## ANTI-SEIZE COMPOUNDS

### 550® Molybdenum Disulphide Anti-Seize Compound



**Operating Range** -54°C to 1,316°C (-65°F to 2,400°F)

550 contains molybdenum disulphide ( $\text{MoS}_2$ ), graphite, and low friction fillers in an aluminum complex base grease that is fortified with effective rust and corrosion inhibitors. It will not harden, evaporate, or settle out.

SKU #	Size
15502	1/2 lb brush top
15504	1 lb brush top
15523	10 lb pail
15515	50 lb pail

### Kopr-Kote® HT Copper/Graphite High Temperature Anti-Seize Compound



**Operating Range** -54°C to 815°C (-65° to 1500°F)

When used/applied, Kopr-Kote will protect against seizure, heat-freeze, galling, rust and corrosion. It lowers friction, permits re-use of fittings (thus saving you money on replacement), lowers maintenance costs and is not affected by contraction, expansion or vibration. Recommended for production and maintenance jobs where speed in assembling and dismantling is essential. **NOTE: not suitable for use with oxygen or LPG Lines.**

SKU #	Size
10250	400 g cartridge
10202	225 ml brush top
10203	450 ml brush top
10204	1 liter jar



## Nikal® Pure Nickel Extreme Temperature Anti-Seize



**Operating Range** -54°C to 1427°C (-65°F to 2600°F)

Premium quality anti-seize and gasket compound, ideal for use in extreme temperatures and hostile environments. Can be applied on items, such as burner tips, manifolds, pipe fittings, furnace hinges, heat exchangers, manhole studs. May be safely used with ammonia, acetylene and vinyl monomers, which are unstable in the presence of copper. Contains no graphite, which is an additional benefit on stainless steel applications. **Note: Not for use on oxygen or LPG lines !**

SKU #	Size
13602	225 ml brush top
13604	1 liter jar
13605	5 liter pail
13615	15 liter pail
13655	55 liter drum

## THREAD SEALANTS

### Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). Because of its characteristics, Petro-Tape is far superior to other PTFE tapes for heavy-duty use. ULC Listed for sealing metal threaded pipe connections.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

### TF-15 Thread Sealing Compound



**Operating Range** -23°C to 315°C (-10°F to 600°F)

Excellent for use on all threads subject to vibration, surge, pressure and temperature fluctuations. Particularly useful in areas subject to H<sub>2</sub>S and salt water. Recommended for lines carrying a wide variety of oils, solvents, gases (except oxygen), acids, alkalis and steam. Prevents galling and thread wear, seals badly worn threads and greatly increases connection life. Seals at temperatures to 315°C and pressures to 10,000 PSI.

SKU #	Size
23002	225 ml brush top
23067	250 ml tube
23004	1 liter jar
23005	5 liter pail
23010	10 liter pail
23015	15 liter pail

## EP GREASES

### Alco-EP Premium Multi-Purpose Grease



**Operating Range** -32°C to 232°C (-25°F to 450°F)

Designed for friction and anti-friction bearings, bushings, chassis points, U-joints, pivot pins and a wide range of other fleet and equipment applications. Provides superior wear protection against extreme pressure and is highly water resistant.

SKU #	Size
37050	14 oz cartridge
37016	35 lb pail
37029	400 lb drum
37055	120 lb keg

### AP-5 High Temperature All-Purpose Grease



**Operating Range** -25°C to 288°C (-13°F to 550°F)

Recommended for use on ball, roller and sleeve bearings, shackles, conveyor chains, sealed assemblies, etc. Provides heavy-duty long-life protection in heavy equipment. When applied, it means that all your mechanical components, which are demanding superior lubrication, will last 2 to 10 times longer than when a regular grease has been applied. Especially recommended for lubrication points prone to neglect.

SKU #	Size
25067	250 ml squeeze tube
25050	400 g cartridge
25004	1 liter jar
25005	5 liter pail
25010	10 liter pail
25055	55 liter keg
25075	205 liter drum

## Arctic Low Temperature Service Grease



**Operating Range** -54°C to 106°C (-65°F to 225°F)

May be used on automobiles where lubricating properties of a moderate to severe nature are required over a wide range of temperatures. Arctic has passed Federal Test Method Standard No. 791B, Method No. 3454.2 "Leakage Tendencies of Automotive Wheel Bearing Greases" plus the salt spray resistance and rust tests for severe environmental contact greases.

SKU #	Size
35050	400 g cartridge
35016	35 lb pail
35029	400 lb drum

## LUBRICANTS

### CableLube Wire Rope & Chain Lubricant



**Operating Range** -57°C to 200°C (-70°F to 392°F)

**Today's no. 1 wire rope lubricant & penetrant.** When being applied, it will flow freely and will penetrate into the core of the wire rope. After being applied, the lube will set and become thicker, which helps it to stay put. As such, it will drastically reduce friction and this reduction in friction reduces micro-pitting and micro-fissions, thus reducing stress and fatigue fractures from forming in the wire rope. The result is a longer cable life, less downtime, less cost and more production.

SKU #	Size
CableLube	
306820	20 liter pail
306875	205 liter drum
Aerosol	
304741	370 g aerosol
CableLube Arctic	
304720	20 liter pail
304775	205 liter drum

### Gear-Guard™ Paste Open Gear Lubricant



**Operating Range** -32°C to 175°C (-25°F to 350°F)

To be used on open gears, roller gears, drive chains, etc. Provides maximum lubrication and shock-load protection, reduces gear noise, and prevents scoring and welding of gear teeth. Resists heat and pressure, will not wash or wear off because of weather, and will not break down after repeated workings. Is moisture resistant i.e., actually displacing water.

SKU #	Size
17905	9 lb pail
17941	12 oz aerosol

### OG-H Open Gear Lubricant



**Operating Range** -18°C to 285°C (-0°F to 550°F)

To be used on exposed gears of all types, on steam and power winches, hoists, mill and forge equipment, construction machinery, power shovels and dredges, shovel gears, pulverizers, bull gears, etc. Can be applied on the bearings in slow moving equipment wherever high unit pressures occur. OG-H has excellent "stay put" qualities, will not melt or throw-off and is ideal for use at high temperatures, where other lubricants become runny or drip off.

SKU #	Size
26050	14 oz cartridge
26004	1 liter jar
26005	5 liter pail
26015	15 liter pail
17955	55 liter keg

### Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol



## WLD™ Wire Line Dressing



**Operating Range** -32°C to 175°C (-25°F to 350°F)

Highly tenacious, adhesive lubricant containing both molybdenum disulphide (MoS<sub>2</sub>) and graphite, and is specially formulated for use on wire lines, cable and open roller chains. WLD penetrates the outer strands of wire rope and cable, displacing moisture, and permeating to the core of the rope or cable, lubricating and protecting against each strand. As the carrier solvent of WLD evaporates, a thin, flexible film of lubricant is formed.

WLD may be used on crane and drag line hoist and drag lines, oilfield wire lines, offshore rig anchor cables, drilling lines, or any wire rope cable that operates at extremes of operating speeds and loads in harsh environments.

SKU #	Size
28510	7 lb can
28516	5-US gal pail
28541	12 oz aerosol

## PENETRANTS & CLEANERS

### 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability', removes moisture; prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

### Clean-Up™ Industrial Cleaner & Solvent



**29 KV dielectric strength**

Ideal for cleaning items, such as engine components, motors, machine parts, cement flooring, gears, chains, bearings, appliances, cables, tools, metal surfaces, injectors. Effectively dissolves grease, oil, paint, grime, dirt and dust. **NOTE: its high solvency can adversely affect certain paints and plastics, so product should be tested on critical surfaces, prior to large-scale usage.**

SKU #	Size
61542	510 g aerosol
61535	5-US gal pail

### Easy-Clean® (Powder) Concentrated Detergent Powder Rig Wash



Highly concentrated and biodegradable powdered detergent specifically formulated to meet the equipment cleaning needs of the oilfield and heavy industry. It removes dirt, oil and grime from equipment, floors and work wear with either fresh or salt water. It is harmless to rubber and to painted wood when solution instructions are followed.

Diesel fuel, kerosene, or suitable solvent may be added for extra cleaning power if considerable oil or grease is present. EASY-CLEAN may also be used as a steam cleaning compound and in washing machines for cleaning badly soiled work clothes.

SKU #	Size
30540	40 lb pail

### Easy-Clean® (Liquid) Alkaline Cleaner and Degreaser Concentrate



**Operating Range** 1°C to 99°C (34°F to 210°F)

An alkaline based cleaner degreaser that uniquely combines cleaning agents with newly developed emulsifying technology to provide a product that can effectively remove carbon, grease, oil and other organic deposits while being both safe for our environment and ozone friendly. Contains no acids, chlorides, phosphates or other toxic ingredients.

**Note: In its concentrated form, EASY-CLEAN LIQUID could be corrosive to aluminum and its alloys.**

SKU #	Size
30035	5-US gal pail

## PS Terminal™ Electrical Contact Cleaner



35 KV dielectric strength

To be used for various aerospace applications. When applied, it will penetrate and remove dirt, grease and organic contaminants from electrical and electronic components and equipment. Because of its formula (a blend of HFC solvents) it will not damage the environment or ozone levels. When applied, it evaporates, leaving a residue-free surface. Meets BOEING SPEC D6-17487, Revision H, McDonald Douglas CSD #1 and Lear Jet LAS 1239.

SKU # 60242 Size 454 g aerosol

## TEST AND INJECTION PUMP

### JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU # JP03 JP05 Size 3-US gal 5-US gal

### Jet-Lube products listed alphabetically

12/34  
202 Moly-Lith  
550  
769

**A**  
Alco EP  
Alco-EP ECF  
Alco-EP 73 Plus  
AP-1 White  
AP-5  
API-Modified Arctic  
API-Modified  
Arctic Grease  
AX-2

**B**  
Bullseye

**C**  
CableLube  
CB-2  
CC-Lube  
Clean-Up  
Clean-Up Plus  
Creeper-Lube

**E**  
Easy-Clean  
Easy-Clean Liquid  
ECF Anti-Seize  
Eco-Safe  
EMS  
Enviro-Guard  
Enviro-Safe  
EP Bearing Grease  
Extreme

Ezy-Open  
Ezy-Pak 100  
Ezy-Pak 115  
Ezy-Pak 120  
Ezy-Pak 125  
Ezy-Turn 2  
Ezy-Turn 3  
Ezy-Turn 3 Arctic  
Ezy-Turn 4  
Ezy-Turn 5  
Ezy-Turn 6  
Ezy-Turn 8  
Ezy-Turn 12  
Ezy-Turn 14  
Ezy-Turn 22  
Ezy-Turn Body Fill  
Ezy-Turn H<sub>2</sub>S  
Ezy-Turn Polar  
Ezy-Turn PVS

**F**  
FMG  
Food Grade Silicone

**G**  
Gear-Guard  
Graphite Petrolatum

**J**  
J-75  
J-89  
JL-5000  
Jacking System Grease ECF  
Jet-Lok PS-50  
Jet-Lok PS-67  
Jet-Lok TL-72  
Jet-Lube 21

Jet-Plex EP  
JetPump

**K**  
Kiln Grease  
Kollar King  
Kopr-Kote  
Korr-Guard  
Kovr-Kote

**L**  
Lapping Oil  
LBX -Special  
Lite Knight

**M**  
Magic Wrench  
Marine Kopr  
Marine Moly  
Marine MP  
Marine Wire Rope & Hawser  
Grease  
Moly-Arc  
Moly-Mist  
Moly Petrolatum  
Moly-Arc  
MotherCutter  
MP-50

**N**  
NCS-30  
NCS-30 ECF  
Nikal  
Nikal Nuclear  
No. 33  
No. 60  
Nuclear Nonmetallic

**O**  
OG-H  
Oven Chain Lubricant

**P**  
Petro-Tape  
PFPE Grease  
Pitless Adapter Lube  
Plumber's Pal  
Powr-Kote  
PS Terminal

**R**  
RD-N  
RD-P  
Renew  
Riser Bolt Lube  
Rubber Lubricant/Mold  
Release  
RuFF 9  
RuFF 21  
Run-N-Seal  
Run-N-Seal ECF  
Rust Guard

**S**  
Seal Guard  
Seal-Guard ECF  
Sheen Free  
Silicone Compound DM  
Silicone Spray  
Silver Plus  
SS-30

**T**  
Temp-Guard  
TF-15  
TF-500  
TFW  
Top Gun  
Tuff E Nuff

**U**  
Ultra

**V**  
V-2

**W**  
Well-Guard  
White Knight  
White Lithium  
Wire Line Lubricant ECF  
WLD  
WRL

**Z**  
Z-50  
Z-Plate  
Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.






J e t - L u b e o f C a n a d a L t d .

# VALVE MAINTENANCE

Packing Compounds & Body Fillers

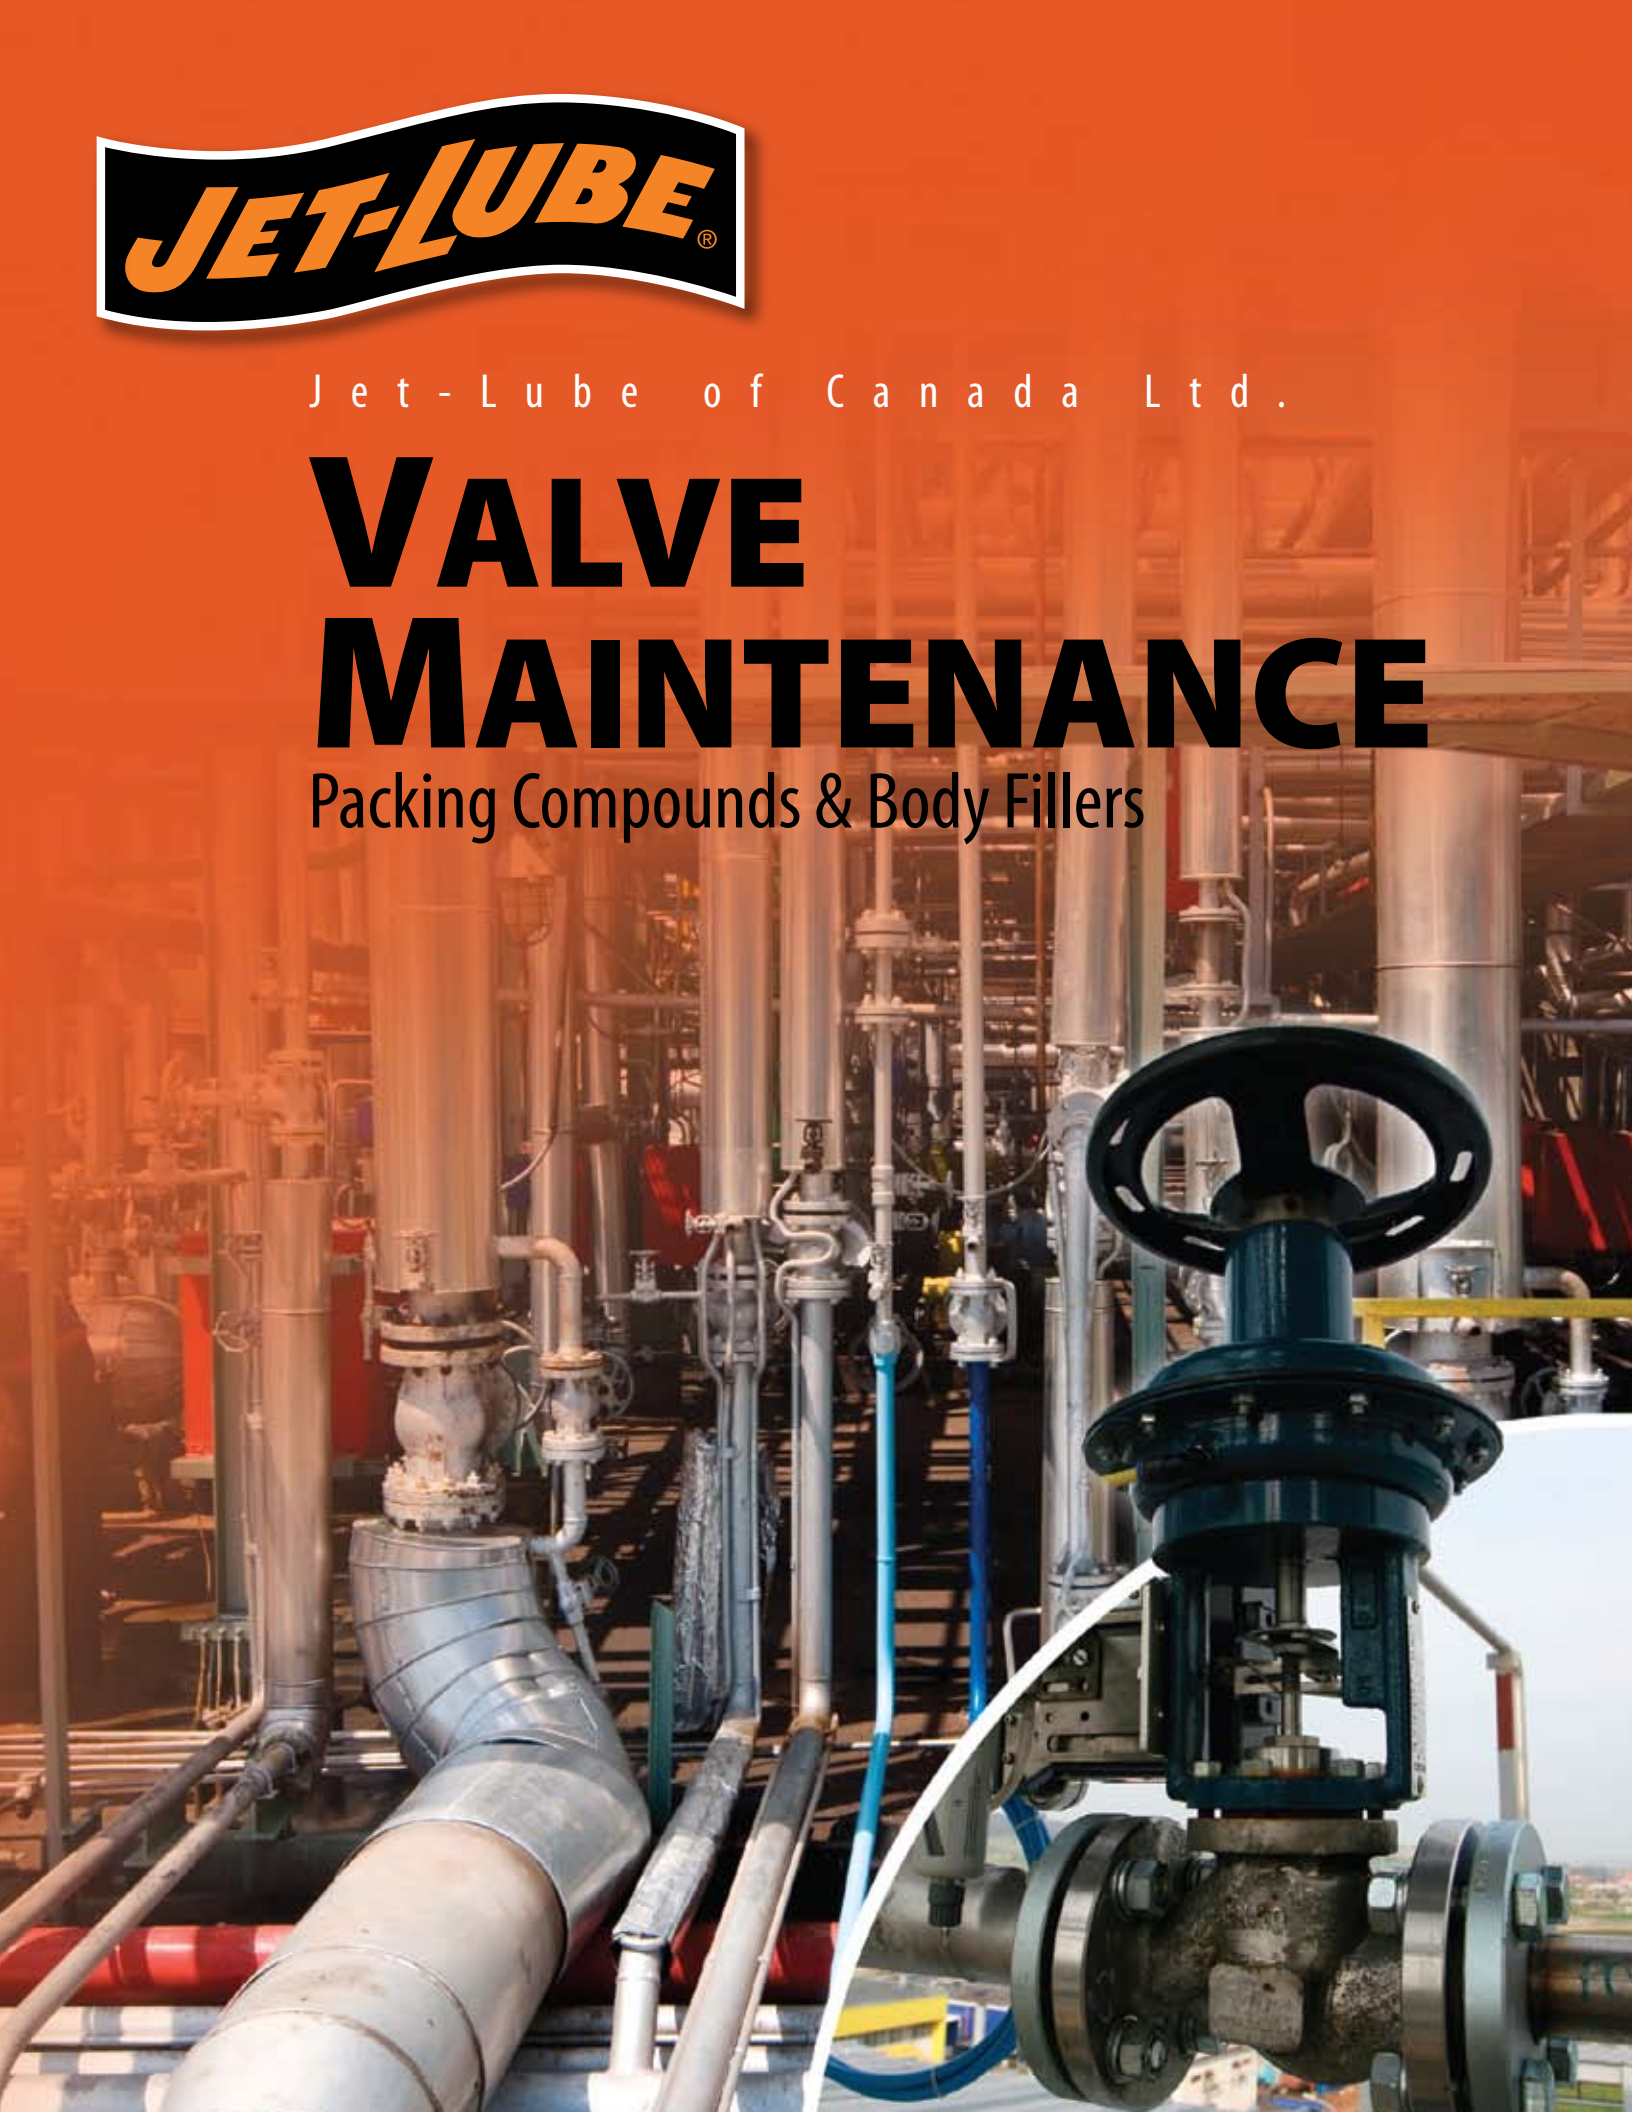





# VALVE MAINTENANCE

Packing Compounds & Body Fillers

## Featured Products

**AX-2** - Valve Lubricant

**Ezy-Open** - Valve Penetrant

**Ezy-Pak #100** - Packing Compound with PTFE

**Ezy-Pak #115** - Packing Compound

**Ezy-Pak #120** - General Purpose Packing Compound

**Ezy-Pak #125** - Packing Compound

**Ezy-Turn #2** - General Purpose Gate Valve Sealant

**Ezy-Turn #3** - Plug Valve Sealant

**Ezy-Turn #3 Arctic** - Gate and Plug Valve Sealant

**Ezy-Turn #4** - Gate Valve Sealant

**Ezy-Turn #5** - General Purpose Plug Valve Sealant

**Ezy-Turn #6** - Plug Valve Sealant

**Ezy-Turn #8** - Plug Valve Sealant with Ground PTFE

**Ezy-Turn #12** - Gate Valve Sealant and Body Filler Lubricant

**Ezy-Turn #14** - Gate Valve Sealant and Body Filler Lubricant

**Ezy-Turn #22** - Gate Valve Sealant and Body Filler Lubricant

**Ezy-Turn Body Fill** - Gate Valve Sealant

**Ezy-Turn H<sub>2</sub>S** - Gate Valve Sealant

**Ezy-Turn Polar** - Gate Valve Sealant for Arctic Conditions

**Ezy-Turn PVS** - Plug Valve Supreme Sealant

**JetPump** - Two-Stage Hydro-Testing Pump



## AX-2 Valve Lubricant



**Operating Range** -25°C to 288°C (-13°F to 550°F)

To be used as a general purpose lubricant in all types of valves or wherever a non-melting, water resistant lubricant is required. It prevents wear and offers positive protection in extreme services, which require heavy-duty lubricating performance.

SKU #	Size
31450	375 g cartridge
31455	55 liter keg
31475	180 kg drum

## EZY-Open™ Valve Penetrant



**Operating Range** -23°C to 204°C (-10°F to 400°F)

Designed to penetrate scale, rust, corrosion and old oxidized hardened valve lubricants, which can disable or make valves extremely difficult to operate. Excellent for use in any injectable assembly to assist in disassembly.

SKU #	Size
99050	1 lb cartridge
99016	40 lb pail

## EZY-Pak™ #100 Packing Compound Containing Ground PTFE



**Operating Range** -18°C to 288°C (0°F to 550°F)

Ideal for any application where the chemical resistance of a PTFE gasket or packing is required and a means is provided for injecting the packing into the area to be sealed. Formulated with minimum binder, providing an almost pure PTFE gasket or sealant. **NOTE: not for use with oxygen or strong oxidizers**

SKU #	Size
97081	J-Stick

## EZY-Pak™ #115 Packing Compound For Use in WKM Type Valves



**Operating Range** -62°C to 288°C (-92°F to 550°F)

Specifically designed for use in WKM type stem glands. **For Industrial/Marine applications:** an easy to use packing compound for any industrial or marine application, requiring a leak-free seal in a WKM type valve. **For Oilfield applications:** to be used as an injectable packing that can be pumped into the stem gland through ball check fittings on the body or bonnet or can be formed by hand and pressed into any area requiring a packing. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
98581	J-Stick
98582	K-Stick

## EZY-Pak™ #120 General Purpose Packing Compound



**Operating Range** -18°C to 260°C (0°F to 500°F)

To be used in any oilfield, industrial or marine application in which an injectable packing is desired to fill an internal void. Is hydrocarbon and water resistant and provides excellent sealing capacity when injected under pressure into valve bonnets, stuffing boxes, and other areas requiring packing. Recommended for hydrocarbon and aqueous services. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
97581	J-Stick

## EZY-Pak™ #125 Packing Compound for Arctic Conditions



Operating Range -60°C to 288°C (-75°F to 550°F)

Specifically designed to provide a **flexible** packing under **ARCTIC** conditions. **Oilfield applications:** recommended for valve and wellhead use. **Industrial/ Marine applications:** recommended for use in any application requiring water or hydrocarbon resistance at low or moderate temperatures. Particularly effective in hot water, brine, aqueous solutions or steam services to 121°C. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
98081	J-Stick
98082	K-Stick

## EZY-Turn #2™ Gate Valve Sealant



Operating Range -29°C to 260°C (-20°F to 500°F)

To be used as a general purpose gate valve sealant, where hydrocarbon resistance is important. Will seal against leakage and protect precision gate valves from scoring, galling and corrosion. Extremely resistant to water. The ideal product for general industrial and oilfield applications. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
90580	B-stick
90581	J-stick
90522	10 lb can
90516	40 lb pail

## EZY-Turn™ #3 Plug Valve Sealant



Operating Range -18°C to 260°C (0°F to 500°F)

Specifically designed for any plug valve application requiring aliphatic liquid and gas resistance. Easily pumpable to temperatures as low as -18°C with high pressure lubricators. The ideal product for pipeline and compressor station operation. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
93080	B-stick
93081	J-stick

## EZY-Turn™ #3 Arctic Gate & Plug Valve Sealant



Operating Range -40°C to 260°C (-40°F to 500°F)

Specifically designed for any plug valve application requiring aliphatic liquid and gas resistance. Easily pumpable to temperatures as low as -40°C with high pressure lubricators. The ideal product for pipeline and compressor station operation. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
93115	30 lb pail
93124	120 lb keg
93129	400 lb drum

## EZY-Turn™ #4 Gate Valve Sealant



Operating Range -40°C to 260°C (-40°F to 500°F)

The ideal product for applications requiring maximum hydrocarbon resistance. Is pumpable at -40°C, while retaining its firm consistency at 260°C inside a valve where oxygen contact is avoided. Excellent resistance to water and aqueous solutions, but not recommended for steam or high alkaline service. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
92080	B-stick
92081	J-stick
92022	10 lb can

## EZY-Turn™ #5 General Purpose Plug Valve Sealant



Operating Range -18°C to 204°C (0°F to 400°F)

Can be used as the primary sealant in most plug valve lubrications programs. It is suitable for aqueous and hydrocarbon service. Its heavy viscosity base oils provide maximum sealing power, while lowering the torque required to operate the valve. Recommended for use in oilfield, refining, petrochemical, power plant, chemical plant and marine applications. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
93580	B-stick
93581	J-stick
93582	K-stick
93522	10 lb can



## EZY-Turn™ #6 Plug Valve Sealant



**Operating Range** -35°C to 260°C (-30°F to 500°F)

To be used as an all-purpose sealant for use in any application involving aliphatic hydrocarbon product streams. Resistant to water and aqueous services, but is not recommended for steam service. **Oilfield applications:** ideal for use in plug valves where the temperature range of conventional vegetable oil sealants preclude their use. Particularly effective in the -35°C to -7°C temperature range.

SKU #	Size
94022	10 lb can
94016	40 lb pail

## EZY-Turn™ #8 Plug Valve Sealant with Ground PTFE



**Operating Range** -18°C to 230°C (0°F to 450°F)

To be used as an ideal sealant/lubricant for applications where a worn, scored or leaking valve is encountered. The high percentage of ground PTFE in this product is designed to provide maximum sealing power and lubrication in problem situations. It is both water and oil resistant. Can be used in virtually any oilfield, industrial or marine application. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
94581	J-Stick
94582	K-Stick
94522	10 lb can

## EZY-Turn™ #12 Gate Valve Sealant & Body Filler Lubricant



**Operating Range** -18°C to 93°C (0°F to 200°F)

Designed for use with WKM and other gate valves incorporating body cavities. Recommended for use in applications where a hydrocarbon resistant sealant is required. Primarily designed for oilfield applications. Can be used on wellheads or line valves. Effective in services that involve mixtures of hydrocarbons with salt water, dilute acids or alkalies and other mixtures encountered in production situations. When applied, it will lower the torque required to operate the valve, while providing a positive seal against leaks. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
95522	10 lb can
95516	50 lb pail

## EZY-Turn™ #14 Gate Valve Sealant & Body Filler Lubricant



**Operating Range** -40°C to 204°C (-40°F to 400°F)

Designed for use with WKM and similar gate valves having body cavities at low and high temperature extremes, where vegetable oil type products will fail. Primarily designed for oilfield applications. Can be used on wellheads or line valves. Effective in services that involve mixtures of hydrocarbons with salt water, dilute acids or alkalies. The "Product of Choice" for high and low temperature extremes. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
91483	10 lb can

## EZY-Turn™ #22 Gate Valve Sealant & Body Filler Lubricant



**Operating Range** -46°C to 149°C (-50°F to 300°F)

A premium sealant, formulated from a unique blend of synthetic and vegetable based oils for use in WKM type valves. Contains no solid fillers that may inhibit valve lubrication, so it should be used where solid fillers mandated in the 'peanut butter' type sealants are not wanted. Especially effective in gaseous hydrocarbon services. Recommended for services consisting of blends, such as condensate crude or gas mixed with salt water, dilute alkalies or acids, or other foreign materials. **NOTE: not for use with oxygen or strong oxidizers.**

SKU #	Size
96522	10 lb can
96516	40 lb pail
96524	120 lb keg
96529	400 lb drum

## EZY-Turn™ Body Fill Gate Valve Sealant



**Operating Ranges** -23°C to 177°C (-10°F to 350°F)

SKU #	Size
92516	35 lb pail

A petroleum oil based sealant, suitable for displacing water and foreign material in gate valve body cavities. To be used in situations, where economy is a factor and maximum hydrocarbon resistance is not required. Has good metal adhesion and readily flows into hard-to-fill orifices and channels, when pumped with a high pressure lubricator. **NOTE: not for use with oxygen or strong oxidizers.**

## EZY-Turn™ H<sub>2</sub>S Gate Valve Sealant



**Operating Range** -18°C to 177°C (0°F to 350°F)

SKU #	Size
91016	40 lb pail

A premium gate valve sealant, recommended for use in gate valves where contact with sour crude or gas is expected. Excellent for use with aliphatic hydrocarbons, such as diesel fuel.

**NOTES:** (1) for temperatures lower than -18°C, use Ezy-Turn Polar  
(2) not for use with oxygen or strong oxidizers.

## EZY-Turn™ Polar Gate Valve Sealant for Arctic Conditions



**Operating Ranges** -59°C to 121°C (-75°F to 250°F)

SKU #	Size
91522	10 lb can
91516	35 lb pail
91524	120 lb keg
91529HL	400 lb drum Heavy Lined

Specifically designed for gate valve lubrication under arctic conditions. Is completely resistant to hydrocarbons, hydrogen sulphide, carbon dioxide and water. Pumpable with a high pressure lubricator up to -59°C.

## EZY-Turn™ PVS Plug Valve Supreme Sealant



**Operating Ranges** -29°C to 232°C (-20°F to 450°F)

SKU #	Size
91322	10 lb can
91316	40 lb pail
91324	120 lb keg

To be used as the primary sealant in most plug, ball and gate valve lubrication programs. Is suitable for aqueous and hydrocarbon service. Its heavy viscosity base oils provide maximum sealing power, while lowering the torque required to operate the valve. Recommended for use in oilfield, refining, petrochemical, power plant, chemical plant and marine applications. **NOTE: not for use with oxygen or strong oxidizers.**

## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

SKU #	Size
JP03	3-US gal
JP05	5-US gal

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.



## Jet-Lube products listed alphabetically

12/34	Ezy-Open	Jet-Plex EP	<b>O</b>	<b>T</b>
202 Moly-Lith	Ezy-Pak 100	JetPump	OG-H	Temp-Guard
550	Ezy-Pak 115		Oven Chain Lubricant 	TF-15
769	Ezy-Pak 120	<b>K</b>		TF-500
<b>A</b>	Ezy-Pak 125	Kiln Grease	<b>P</b>	TFW
Alco EP	Ezy-Turn 2	Kollar King	Petro-Tape	Top Gun
Alco-EP ECF 	Ezy-Turn 3	Kopr-Kote	PFPE Grease	Tuff E Nuff
Alco-EP 73 Plus	Ezy-Turn 3 Arctic	Korr-Guard	Pitless Adapter Lube 	<b>U</b>
AP-1 White	Ezy-Turn 4	Kovr-Kote	Plumber's Pal	Ultra
AP-5	Ezy-Turn 5		Powr-Kote	
API-Modified Arctic	Ezy-Turn 6	<b>L</b>	PS Terminal	
API-Modified	Ezy-Turn 8	Lapping Oil		<b>V</b>
Arctic Grease	Ezy-Turn 12	LBX -Special	<b>R</b>	V-2
AX-2	Ezy-Turn 14	Lite Knight	RD-N	
	Ezy-Turn 22		RD-P	<b>W</b>
	Ezy-Turn Body Fill	<b>M</b>	Renew	Well-Guard 
<b>B</b>	Ezy-Turn H <sub>2</sub> S	Magic Wrench 	Riser Bolt Lube	White Knight 
Bullseye 	Ezy-Turn Polar	Marine Kopr	Rubber Lubricant/Mold Release	White Lithium
	Ezy-Turn PVS	Marine Moly	RuFF 9	Wire Line Lubricant ECF 
<b>C</b>		Marine MP	RuFF 21	WLD
CableLube	<b>F</b>	Marine Wire Rope & Hawser Grease	Run-N-Seal	WRL
CB-2	FMG 	Moly-Arc	Run-N-Seal ECF 	<b>Z</b>
CC-Lube 	Food Grade Silicone 	Moly-Mist	Rust Guard	Z-50
Clean-Up		Moly Petrolatum		Z-Plate Aerosol
Clean-Up Plus	<b>G</b>	Moly-Arc	<b>S</b>	Zinc Petrolatum
Creeper-Lube	Gear-Guard	MotherCutter 	Seal Guard	
	Graphite Petrolatum	MP-50	Seal-Guard ECF 	
<b>E</b>			Sheen Free 	
Easy-Clean	<b>J</b>	<b>N</b>	Silicone Compound DM	
Easy-Clean Liquid	J-75	NCS-30	Silicone Spray	
ECF Anti-Seize 	J-89	NCS-30 ECF 	Silver Plus	
Eco-Safe 	JL-5000 	Nikal	SS-30	
EMS 	Jacking System Grease ECF 	Nikal Nuclear		
Enviro-Guard 	Jet-Lok PS-50	No. 33		
Enviro-Safe	Jet-Lok PS-67	No. 60		
EP Bearing Grease	Jet-Lok TL-72	Nuclear Nonmetallic		
Extreme	Jet-Lube 21			



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)



## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.






J e t - L u b e o f C a n a d a L t d .

# WATER UTILITIES

Anti-Seize, Sealants and Lubricants

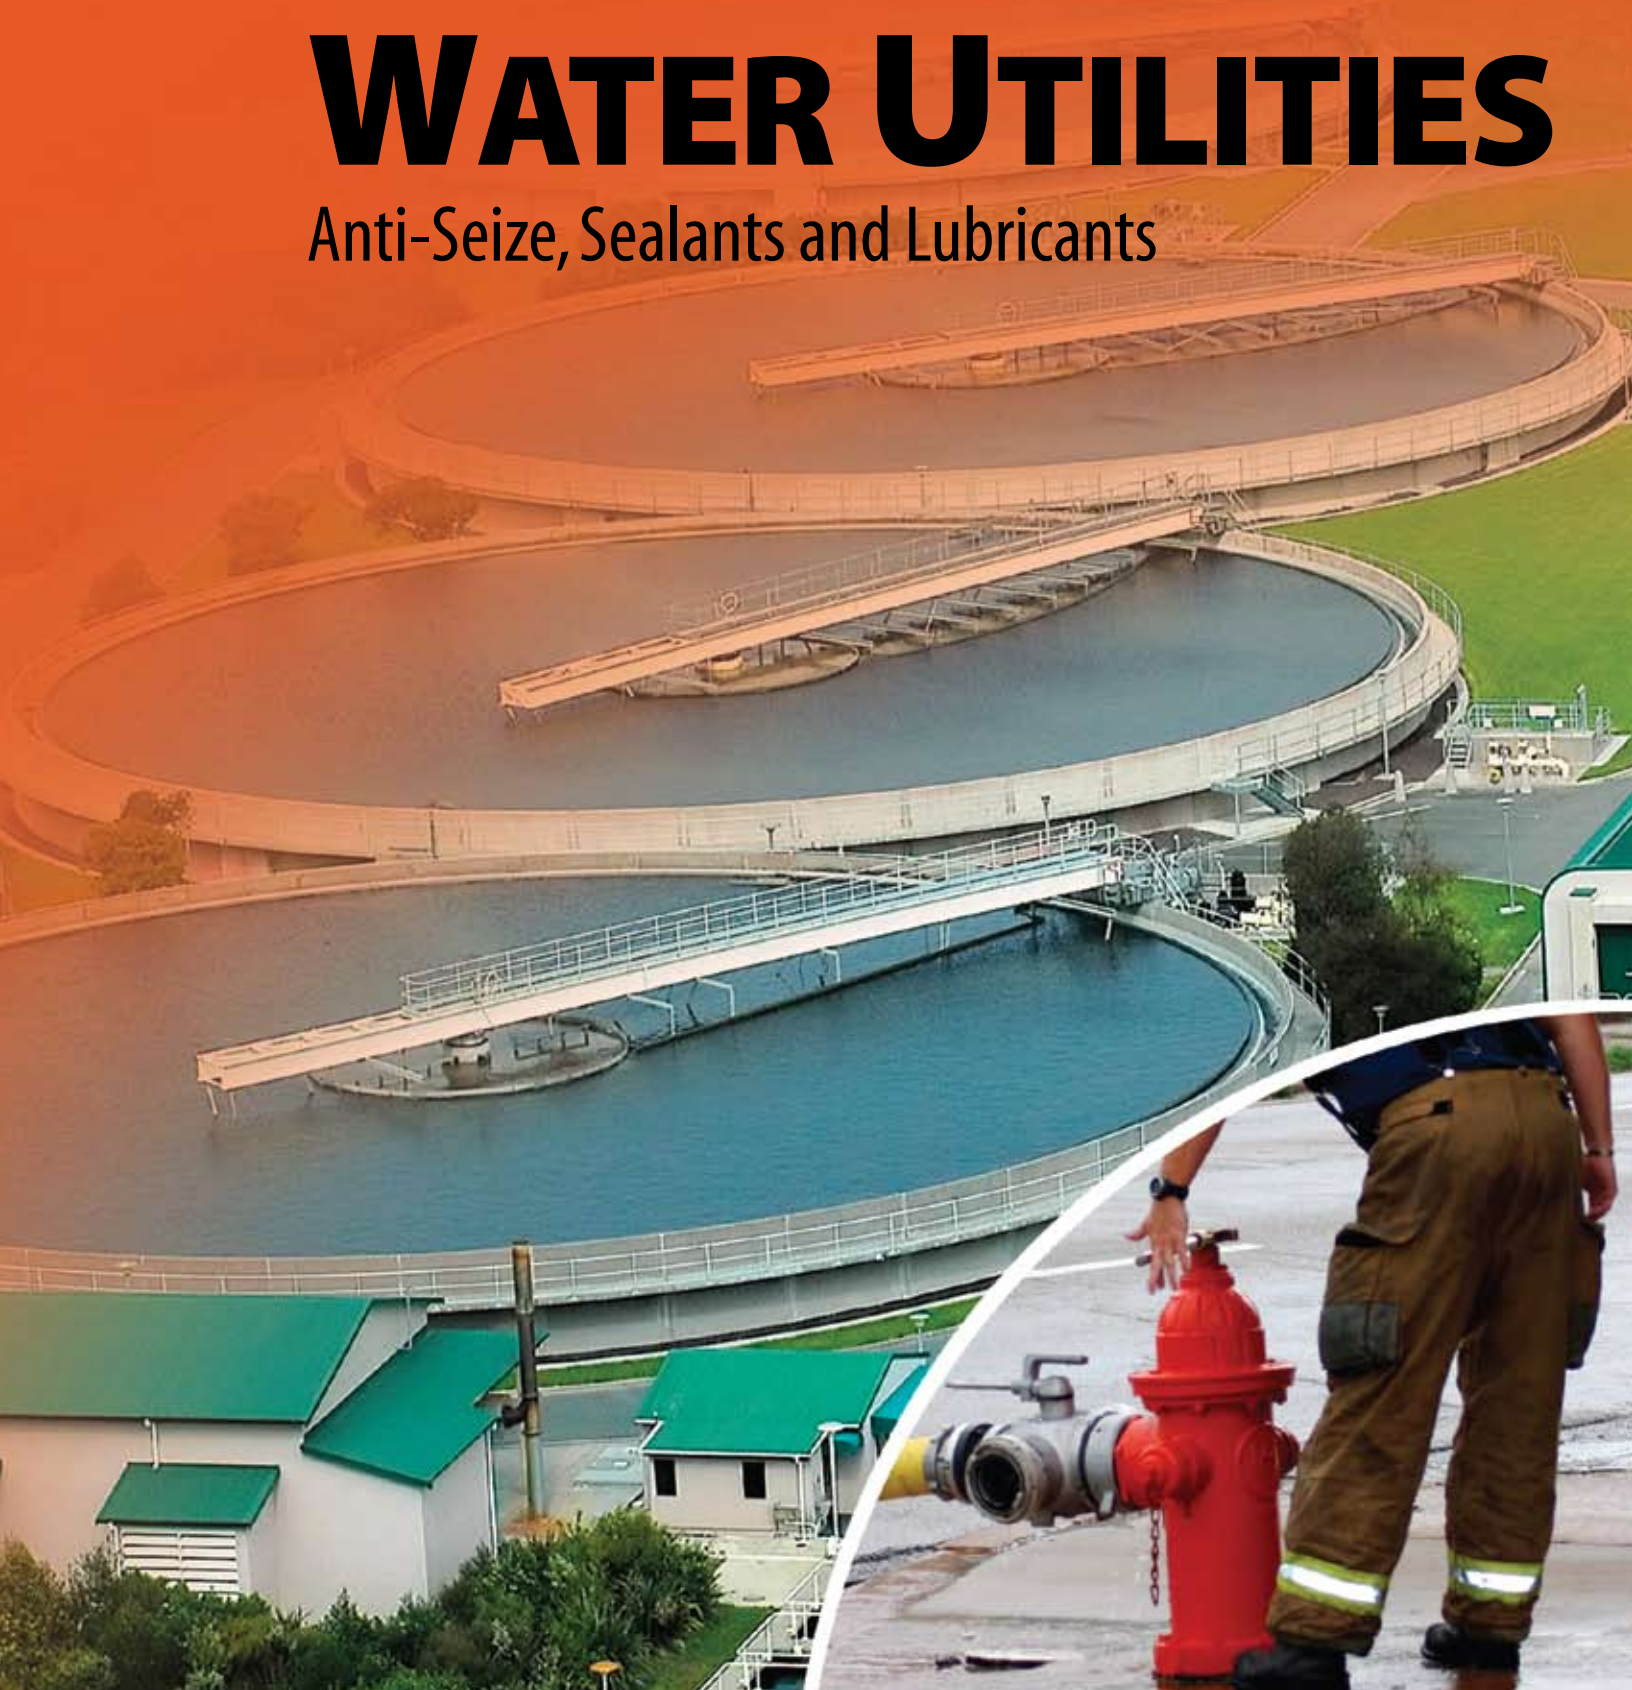





# WATER UTILITIES

Lubricants, Anti-Seize & Thread Compounds

## Featured Products

**12/34** - Lubricant, Penetrant and Coating

**Alco-EP 73+** - Premium Water Resistant Grease

**Arctic** - Extreme Service Grease

**CC-Lube** - Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant

**JetPump** - Two Stage Hydro-Testing Pump

**Magic Wrench** - Super Penetrant

**Nikal** - High Temperature Anti-Seize

**Nikal Nuclear** - High Temperature Anti-Seize and Gasket Compound

**Nuclear Nonmetallic** - High Temperature Anti-Seize

**Petro-Tape** - PTFE Thread Seal Tape

**PS Terminal** - Electrical Contact Cleaner

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**TFW** - Multi-Purpose Thread Sealant with PTFE

**V-2** - Multi-Purpose PTFE Thread Sealant



## 12/34 Lubricant and Penetrant



**Operating Range** -75°C to 150°C (-100°F to 300°F)

The foremost penetrating, moisture displacing, lubricating and corrosion preventative available today! Unequaled where salt water, salt spray or other harsh environments are encountered. Provides superior protection and anti-wear properties, penetrates into rusted, corroded and frozen metal parts, which will be easily loosened by means of superior 'creepability'. Removes moisture and prevents rust and corrosion.

SKU #	Size
37341	340 g aerosol
37343	500 ml trigger spray
37316	4 liter can
37320	20 liter pail
37375	205 liter drum

## Alco-EP-73 Plus™ Premium Water Resistant Grease



**Operating Range** -32°C to 230°C (-25°F to 450°F)

Specially formulated and developed for conditions where extreme water resistance is necessary. Can be used in applications where tolerances are low and/or speeds are high. Provides superior rust and corrosion protection for maximum service life under harsh conditions.

SKU #	Size
37750	14 oz cartridge
37716	35 lb pail
37724	120 lb keg
37729	400 lb drum

## Arctic Extreme Service Grease



**Operating Range** -54°C to 106°C (-65°F to 225°F)

May be used on automobiles where lubricating properties of a moderate to severe nature are required over a wide range of temperatures. Arctic has passed Federal Test Method Standard No. 791B, Method No. 3454.2 "Leakage Tendencies of Automotive Wheel Bearing Greases" plus the salt spray resistance and rust tests for severe environmental contact greases.

SKU #	Size
35050	400 g cartridge
35016	35 lb pail
35029	400 lb drum

## CC-Lube™ Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant



**Operating Range** -18°C to 204°C (0°F to 400°F)

A clean, clear, colorless, non-staining, non-drying and biodegradable lubricant, that may be safely used on a variety of surfaces, including metal, plastic, rubber, vinyl, nylon and stainless steel in a multitude of applications.

Unsurpassed in reducing friction, extends machine and equipment life and prevents the formation of rust and corrosion over a broad temperature range. CFIA approved and NSF (H-1) authorized for use in federally inspected meat and poultry plants.

SKU #	Size
70550	14 oz cartridge
70623	1-US gal pail
70516	35 lb pail
70524	120 lb keg
70529	400 lb drum



## JetPump Two-Stage Test and Injection Pump



**Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi**

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Magic Wrench® Super Penetrant



**Operating Range** -51°C to 177°C (-60°F to 350°F)

Attacks rust and corrosion quickly and safely, in order to free corroded parts, loosen nuts and assist in the disassembly of mechanical components. Is safe on all metals and plastics. **Ideal product for the lubrication and conditioning of air tools.**

SKU #	Size
39541	13 oz aerosol
39533	1-US gal jug
39535	5-US gal jug



## Nikal® Pure Nickel Extreme Temperature Anti-Seize



**Operating Range** -54°C to 1427°C (-65°F to 2600°F)

A premium quality product, to be used as an anti-seize and gasket compound in extreme temperatures and hostile environments. Is used extensively in refineries, chemical plants, petrochemical plants and power generation facilities where Nikal is used on burner tips, manifolds, pipe fitting, reactor bolts, furnace hinges, heat exchangers, etc.

SKU #	Size
13602	225 ml brush top
13604	1 liter jar
13605	5 liter pail
13615	15 liter pail
13655	55 liter drum

## Nikal® Nuclear High Temperature Anti-Seize and Gasket Compound



**Operating Range** -54°C to 1427°C (-65°F to 2600°F)

Formulated for use in Class 1, 2 and 3 non wetted applications for auxiliary equipment in nuclear power plants. Approved by General Electric and Westinghouse for use with their turbine systems in nuclear applications. Conforms to the requirements of NAVSEAINST 9210.36B **Note: NOT suitable for use on oxygen lines !**

SKU #	Size
13702	225 ml brush top
13755	55 liter drum

## Nuclear Nonmetallic® High Temperature Anti-Seize Compound



**Operating Range** -53°C to 1315°C (-65°F to 2400°F)

Can be used extensively in nuclear and fossil fuel burning power-generating facilities on land and sea where certified products are required. Excellent for use on bolts, fittings, slides, valve stems, gaskets and other similar applications. Conforms to the requirements of General Electric (specifications D50YP12 and D6Y28A1, Rev. 2, Appendix A of NEDE-31295p, NAVSEAINST 9210.36B and 10CFR Chapter 1, Parts 21 and 50, Appendix B)

SKU #	Size
14902	1/2 lb brush-top

## Petro-Tape PTFE Thread Seal Tape



**Operating Range** -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). ULC listed for natural gas, methane, propane, butane, gasoline and petroleum oils.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll



## PS Terminal™ Electrical Contact Cleaner



35 KV dielectric strength

To be used for various automotive applications. When applied, it will penetrate and remove dirt, grease and organic contaminants from electrical and electronic components and equipment. Because of its formula (a blend of HFC solvents) it will not damage the environment or ozone levels. When applied, it evaporates, leaving a residue-free surface.

SKU #	Size
60242	454 g aerosol

## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



Operating Range -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



Operating Range -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## TFW™ Multi-Purpose Thread Sealant with PTFE



Operating Range -18°C to 260°C (0°F to 500°F)

May be used on steel, aluminum, brass, copper, iron, reinforced fiberglass, PVC, CPVC and ABS threaded connections. Specifically formulated to seal threaded connections against leakage due to internal pressure. Recommended for threaded pipe carrying air, ammonia, freons, heating oils, LPG, steam, water, etc. Is listed under the Uniform Plumbing Code (UPC), File No. 1282. **Note: NOT for use on oxygen lines!**

SKU #	Size
24002	1/2 pint brush top
24004	1 pint brush top
24023	1-US gal pail
24015	5-US gal pail

## V-2™ Multi-Purpose PTFE Thread Sealant



Operating Ranges -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, fiberglass, etc. Recommended for threaded pipes carrying air, diesel fuel, natural gas, etc., (specifications of various mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G


Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum

Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O

OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V


V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

Vice President & General Manager  
Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

National Sales & Marketing Manager:  
Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

Technical Service:  
Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

Inside Sales:  
Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.






J e t - L u b e o f C a n a d a L t d .

# **WATER WELL DRILLING**

Anti-Seize, Sealants and Lubricants

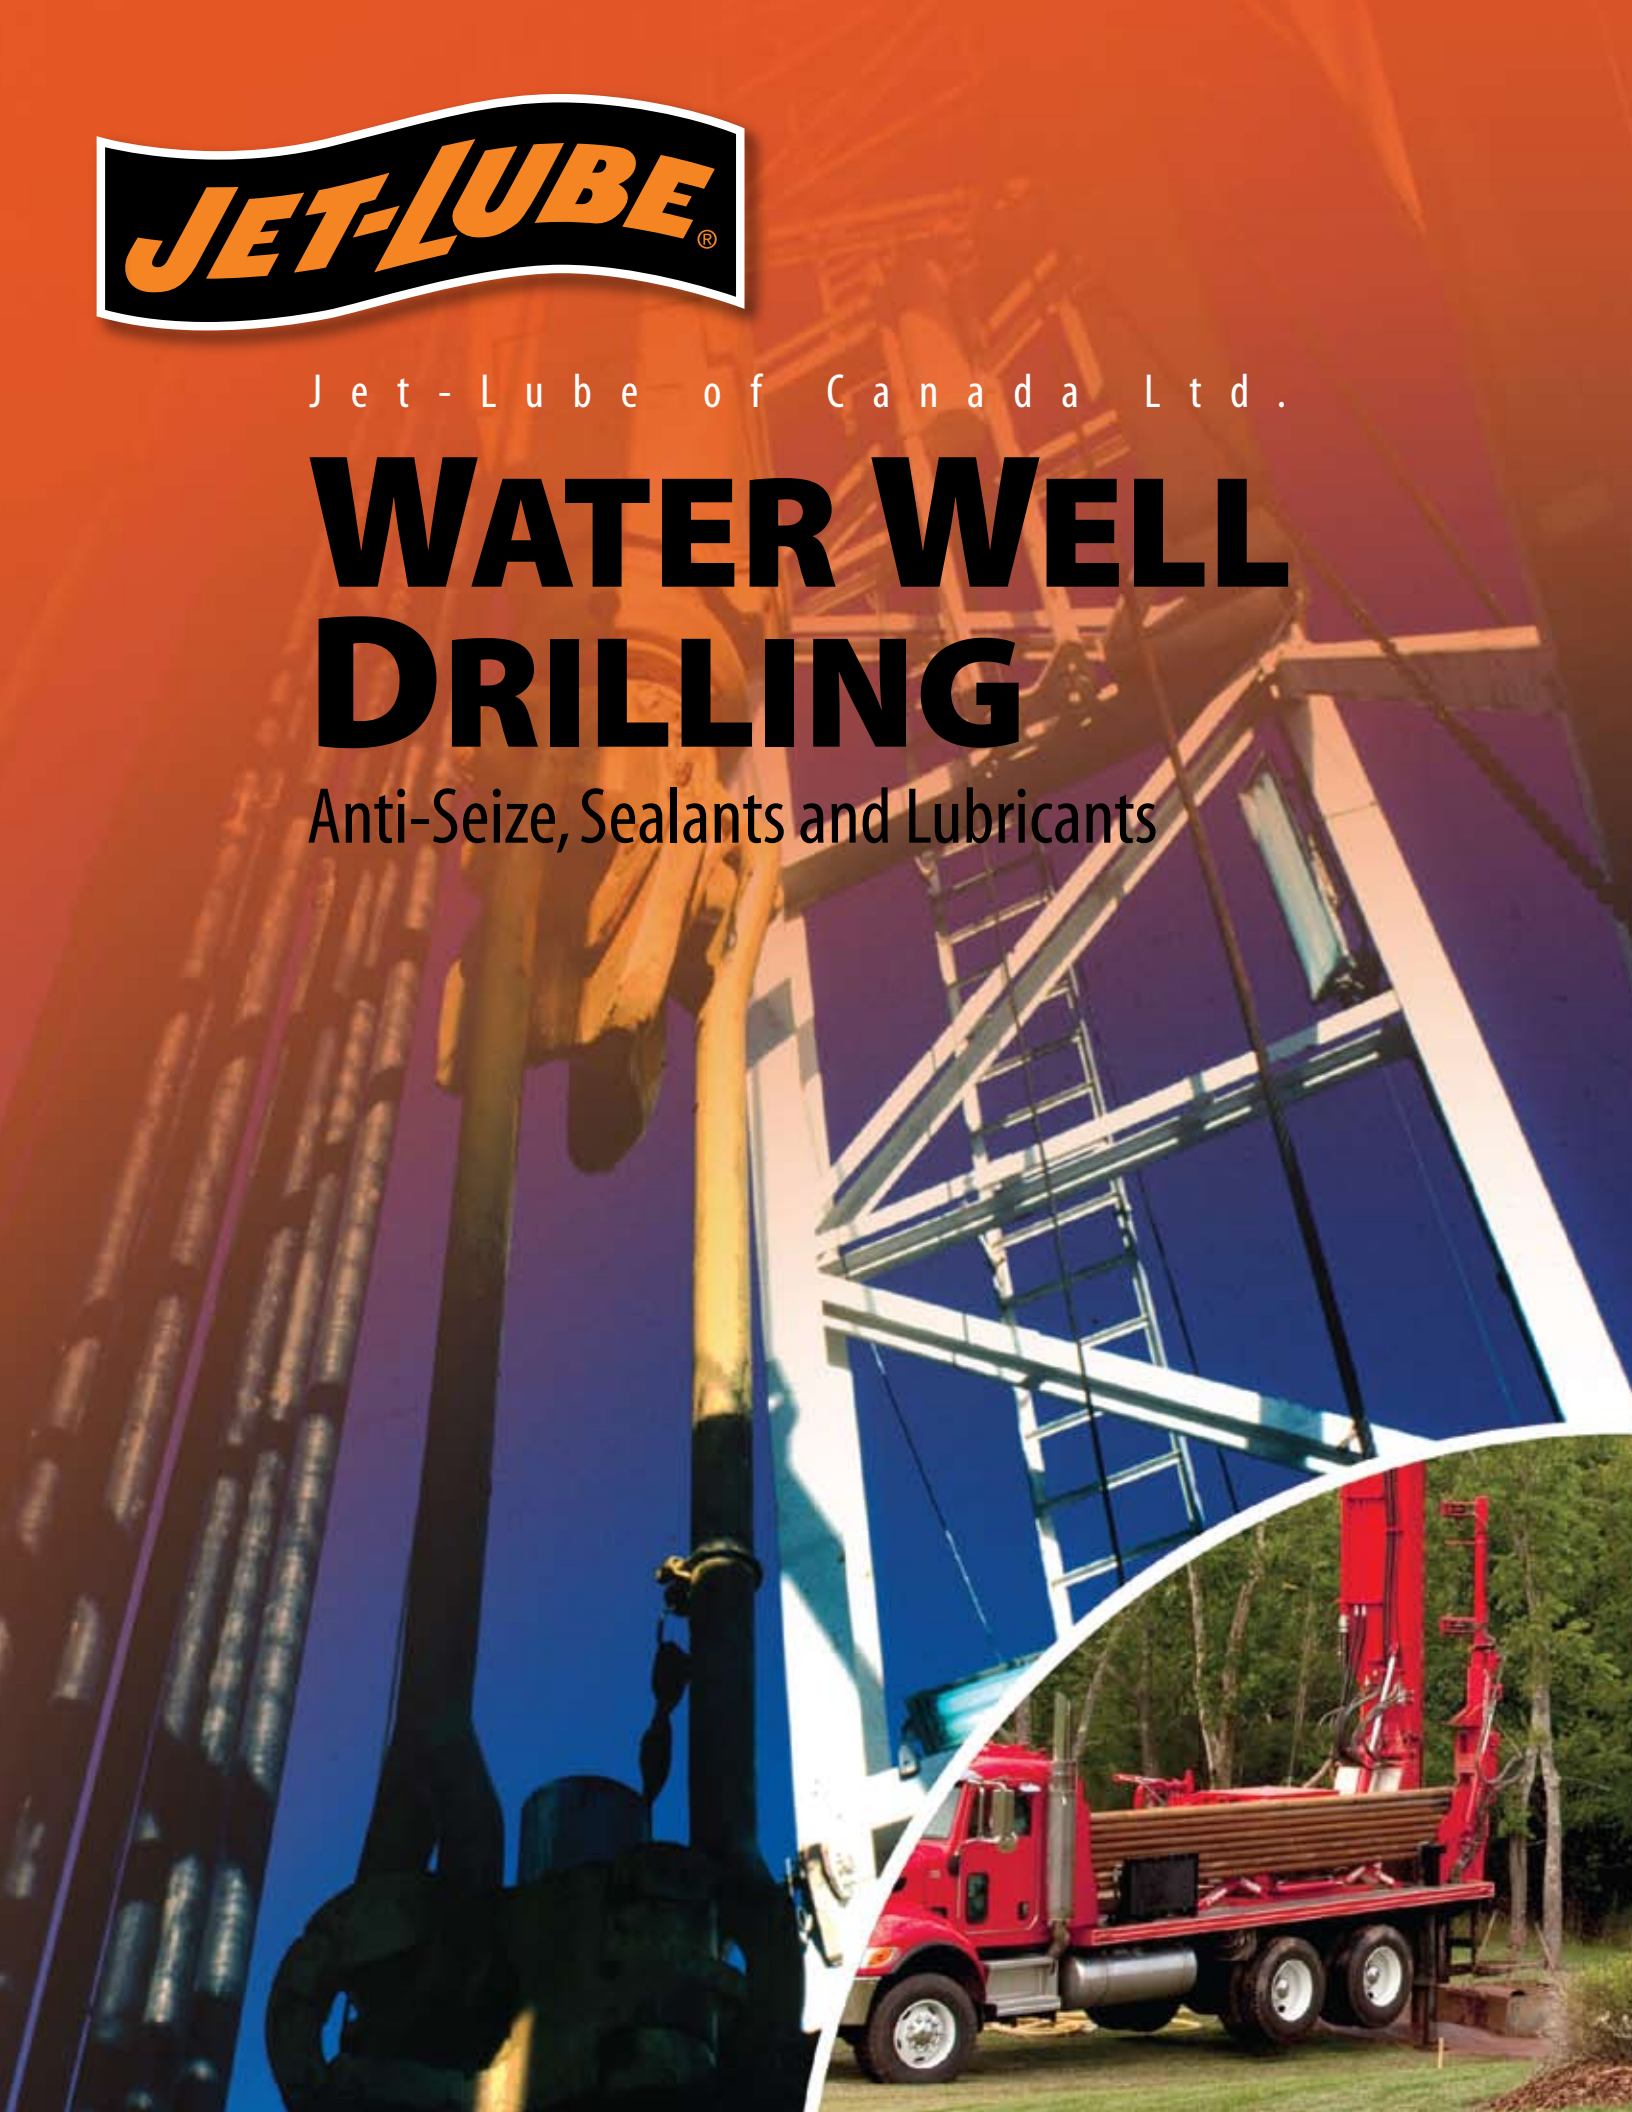





# WATER WELL DRILLING

Lubricants, Anti-Seize & Thread Compounds

## Featured Products

**Bullseye** - Environmental Thread Compound

**CC-Lube** - Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant

**Eco-Safe** - Non-Metallic Thread Compound

**Enviro-Guard** - Drop Pipe Lubricant and Sealant

**JetPump** - Two-Stage Test and Injection Pump

**Lite-Knight** - Tool Joint Compound

**NSC-30** - Industrial Anti-Seize

**Petro-Tape** - PTFE Thread Seal Tape

**Pitless Adapter Lube** - Premium Assembly Lubricant / Preservative

**Silicone Compound DM** - Moisture Proofing Sealant and Lubricant

**Silicone Spray** - Industrial Grade Lubricant

**V-2** - Multi-Purpose PTFE Thread Sealant

**Well-Guard** - Monitor Well Drilling Thread Sealant



Qualifying products will  
bear the thumbprint.

For a complete listing of our products visit: [www.jetlubecanada.com](http://www.jetlubecanada.com)



## Bullseye® Environmental Thread Compound (Non-Hydrocarbon)



**Operating Range** -7°C to 204°C (20°F to 400°F)

Specifically designed for sensitive water well and other environmental drilling applications, which require the use of a petroleum hydrocarbon-free product. Provides maximum protection against galling, seizing and damage to threads, while maintaining water well integrity. **BULLSEYE is biodegradable and completely non-toxic.**

SKU #	Size
66823	1 US gal pail
66813	2 US gal pail



## CC-Lube™ Clean, Clear, Semi-Synthetic Multi-Purpose Lubricant



**Operating Range** -18°C to 204°C (0°F to 400°F)

May be safely used on a variety of surfaces including metal, plastic, rubber (viton, neoprene, buna, HSN) vinyl, stainless steel and nylon in a multitude of utility applications. Unsurpassed in reducing friction, extreme water resistance, extends machine and equipment life, preventing the formation of rust and corrosion over a broad temperature range. Contains anti-bacterial additives to eliminate bacterial culturing.

SKU #	Size
70550	14 oz cartridge
70623	1-US gal pail
70516	35 lb pail
70524	120 lb keg
70529	400 lb drum



## Eco-Safe™ Non-Metallic Thread Compound



**Operating Range** -29°C to 260°C (-20°F to 500°F)

Recommended for use in casing applications, because of its high frictional properties and is especially effective for invert or high-pH muds. Facilitates a consistent, easy make-up on par with traditional thread compounds, without the cost volatility and environmental concerns associated with metallic compounds. Its extreme pressure additives provide additional protection against seizing and galling. ECO-SAFE is non-metallic and completely biodegradable.

SKU #	Size
14523	1 gal US pail
14512	2 US gal pail
14515	5 US gal pail



## Enviro-Guard™ Drop Pipe Lubricant and Sealant



**Operating Range** -29°C to 260°C (-20°F to 500°F)

Specially formulated to assist in the assembly/disassembly of downhole casing for water wells. Ideal for use on high-chrome connections. Provides superior lubrication under high loads with galling resistance equivalent to heavy-metal based compounds. **ENVIRO-GUARD is metal-free and is biodegradable.**

SKU #	Size
18423	1 gal US pail
18412	2 US gal pail
18415	5 US gal pail



## JetPump Two-Stage Test and Injection Pump



Low Pressure/High-Volume for 0-300 psi High Pressure/Low-Volume for 0-5000 psi

JetPump advantage – High and low-pressure injection services, BOP testing, hydro testing and vessel testing just became easier with Jet-Lube's JetPump. These self-priming, two-stage pumps allow testing at either high or low pressures covering a wide range of applications. JetPump's non-pressurized body allows the tank to be refilled without depressurizing or disconnecting from the system every time – saving you time and money. Its stainless steel and aluminum construction eliminates corrosion and is light enough to be carried and rugged enough for industrial use.

SKU #	Size
JP03	3-US gal
JP05	5-US gal

## Lite-Knight Tool Joint Compound



Operating Range -18°C to 205°C (0°F to 400°F)

Primarily designed for use in water well drilling applications. Provides outstanding protection in shallow depths and softer formations, where the makeup and breakout of tool joints remain vital. Also suitable for use in seismic work and coal testing. LITE-KNIGHT is lead-free.

SKU #	Size
11907	7 liter pail
11915	15 liter pail

## Petro-Tape PTFE Thread Seal Tape



Operating Range -240°C to 260°C (-400°F to 500°F)

To be used on threaded pipe connections, hydraulic pressure lines, etc. Suitable for use on lines carrying fuels (such as gasoline, diesel fuel, kerosene and aircraft oils), acids and alkalis, solvents and gases (specifications of various mediums available upon request). ULC listed for natural gas, methane, propane, butane, gasoline and petroleum oils.

SKU #	Size
30790	1/2" x 180" roll
30791	3/4" x 180" roll
30792	1" x 180" roll
30793	1/2" x 540" roll
30794	3/4" x 540" roll
30795	1" x 540" roll
30798	1" x 540" metal roll
30800	1/2" x 540" cardboard roll

## Pitless Adapter Lube™ Premium Assembly Lubricant/Preservative



Operating Range -40°C to 204°C (-40°F to 400°F)

Specially formulated to assist in the assembly and preservation of pitless adapters in water well casing applications. Can also be used for other elastomer installation applications. Incorporates PTFE and other natural food grade boundary lubricants to provide anti-seize technology, which makes disassembly a much easier task in case the base fluids are leached away, biodegraded or absorbed into the elastomer.

SKU #	Size
71741	12 oz aerosol





## Silicone Compound DM™ Moisture Proofing Sealant & Lubricant



**Operating Range** -57°C to 204°C (-70°F to 400°F)

To be used as a protection against moisture. Because of its low volatility, non-melting thickener and high dielectric strength, it is the ideal compound to protect ignition systems, spark plug connections, electrical assemblies, cable and battery terminals and other similar applications.

SKU #	Size
73560	5-oz tube
73503	450 ml brush-top
73504	1 liter jar
73550	14 oz cartridge
73506	5 lb pail
73522	10 lb pail
73516	35 lb pail
73524	120 lb keg
73529	400 lb drum

## Silicone Spray Industrial Grade Lubricant



**Operating Range** -17°C to 177°C (0°F to 350°F)

Silicone Spray is a multi-purpose product that lubricates, waterproofs and protects equipment and tools. It provides high-performance lubrication and corrosion protection on locks, hinges, chains, pulleys, fans, electrical parts such as distributors, ignition wires, spark plugs and more. Silicone Spray is a professional formula that is safe for use on metal, rubber, wood, or vinyl and electrical parts. It is an excellent lubricant for applications in wet environments such as automotive, aerospace, agriculture, construction, mining, oil and gas or valve maintenance.

SKU #	Size
50741	300 g aerosol

## V-2™ Multi-Purpose PTFE Thread Sealant



**Operating Ranges** -56°C to 260°C (-70°F to 500°F)  
69000 kPa liquids 14000 kPa gases

A soft setting non-petroleum based sealant designed for use with potable water, liquids and gases where immediate pressurization is desirable or required. May be used on steel, aluminium, brass, copper, iron, reinforced fibre glass, polyethylene, PVC and CPVC. Recommended for threaded pipes carrying air, CO<sub>2</sub>, diesel fuel, H<sub>2</sub>S, inert gases, refrigerants, etc. (specifications of all mediums available upon request). Pressures to 10,000 Psi for liquids and 2,000 Psi for gases.

SKU #	Size
22002	225 ml brush top
22004	1 liter jar
22005	5 liter pail
22010	10 liter pail
22055	55 liter keg

## Well-Guard® Monitor Well Drilling Thread Compound



**Operating Ranges** -23°C to 204°C (-10°F to 400°F)

Specifically designed for use in critical monitor wells and other environmentally sensitive drilling applications, which require the use of a petroleum hydrocarbon free product. Provides maximum protection against galling, seizing and damage to threads, while maintaining monitor well integrity. WELL-GUARD is in full compliance with all Environmental Protection Agency (EPA) specifications limits. **Well-Guard is petroleum hydrocarbon free and is biodegradable. NOTE: not suitable for use with oxygen or strong oxidizers!**

SKU #	Size
18523	1-US gal pail



## Jet-Lube products listed alphabetically

12/34

202 Moly-Lith

550

769

### A

Alco EP

Alco-EP ECF 

Alco-EP 73 Plus

AP-1 White

AP-5

API-Modified Arctic

API-Modified

Arctic Grease

AX-2

### B

Bullseye 

### C

CableLube

CB-2

CC-Lube 

Clean-Up

Clean-Up Plus

Creeper-Lube

### E


Easy-Clean

Easy-Clean Liquid

ECF Anti-Seize 

Eco-Safe 

EMS 

Enviro-Guard 

Enviro-Safe

EP Bearing Grease

Extreme

Ezy-Open

Ezy-Pak 100

Ezy-Pak 115

Ezy-Pak 120

Ezy-Pak 125

Ezy-Turn 2

Ezy-Turn 3

Ezy-Turn 3 Arctic

Ezy-Turn 4

Ezy-Turn 5

Ezy-Turn 6

Ezy-Turn 8

Ezy-Turn 12

Ezy-Turn 14

Ezy-Turn 22

Ezy-Turn Body Fill

Ezy-Turn H<sub>2</sub>S

Ezy-Turn Polar

Ezy-Turn PVS

### F

FMG 

Food Grade Silicone 

### G

Gear-Guard

Graphite Petrolatum

### J

J-75

J-89

JL-5000 

Jacking System Grease ECF 

Jet-Lok PS-50

Jet-Lok PS-67

Jet-Lok TL-72

Jet-Lube 21

Jet-Plex EP

JetPump

### K

Kiln Grease

Kollar King

Kopr-Kote

Korr-Guard

Kovr-Kote

### L

Lapping Oil

LBX -Special

Lite Knight

### M

Magic Wrench 

Marine Kopr

Marine Moly

Marine MP

Marine Wire Rope & Hawser Grease

Moly-Arc

Moly-Mist

Moly Petrolatum


Moly-Arc

MotherCutter 

MP-50

### N

NCS-30

NCS-30 ECF 

Nikal

Nikal Nuclear

No. 33

No. 60

Nuclear Nonmetallic

### O


OG-H

Oven Chain Lubricant 

### P

Petro-Tape

PFPE Grease

Pitless Adapter Lube 

Plumber's Pal

Powr-Kote

PS Terminal

### R

RD-N

RD-P

Renew

Riser Bolt Lube

Rubber Lubricant/Mold Release

RuFF 9

RuFF 21

Run-N-Seal

Run-N-Seal ECF 

Rust Guard

### S

Seal Guard

Seal-Guard ECF 

Sheen Free 

Silicone Compound DM

Silicone Spray

Silver Plus

SS-30

### T

Temp-Guard

TF-15

TF-500

TFW

Top Gun

Tuff E Nuff


### U

Ultra

### V

V-2

### W

Well-Guard 

White Knight 

White Lithium

Wire Line Lubricant ECF 

WLD

WRL

### Z

Z-50

Z-Plate Aerosol

Zinc Petrolatum



Qualifying products will  
bear the thumbprint.

[www.jetlubecanada.com](http://www.jetlubecanada.com)





Jet-Lube of Canada Ltd. was established in Edmonton, Alberta in 1954 to take advantage of the oil boom ushered in by Leduc oil discovery and to serve the surge of the new Oil Patch. The first products manufactured were primarily thread compounds designed for the drilling and production industries. By focusing on product quality and reliability, Jet-Lube soon became a dominant force in the niche industry of oilfield thread compounds.

In the mid 1970's the product line was diversified to include MRO (Maintenance, Repair, Overhaul) products such as anti-seize compounds, thread sealants, greases and lubricants, cleaners and degreasers, etc. – products that virtually every industry uses in some part of their operations. The same care and attention to quality has quickly brought us to the fore as a world leader in the manufacture of thread compounds and specialty lubricants. New products are constantly being developed to address new technology and environmental concerns.

Since the late 1980s, Jet-Lube has led the way in the development of environmentally-acceptable lubricants, sealants and related specialty products. After years of reformulation and testing, Jet-Lube now offers industries around the world a complete line of environmentally acceptable products that exceed industry standards and meet Jet-Lube's own high-performance criteria. Qualifying products bear our "Eco-Certified" thumbprint.

In 1995 Jet-Lube was one of the first manufacturing companies in Canada to receive the ISO 9000 series certification and in 2008 upgraded to the 9001:2008 standard.

Over the past decade warehouse facilities have been added across Canada to better serve our customers from coast to coast. While Jet-Lube of Canada Ltd. continues to be inspired by the potential for further growth, the prime commitment will always be to customer satisfaction.

We are always happy for the opportunity to talk to our customers and potential customers about our products and about specific applications. If we don't have a product on the shelf that will help, ask us about developing or modifying a product specifically for your application. Solving problems is what helps us grow!





## CONTACT US

### Head Office

3820-97 Street NW  
Edmonton, Alberta T6E 5S8

Toll Free Ph: 1-888-771-7775  
Local Phone: (780) 463-7441

Toll Free Fax: 1-888-449-4449  
Fax: (780) 463-7454

[sales@jetlubecanada.com](mailto:sales@jetlubecanada.com)  
[www.jetlubecanada.com](http://www.jetlubecanada.com)

### Vice President & General Manager

Gary McCormick  
[garym@jetlubecanada.com](mailto:garym@jetlubecanada.com)

### National Sales & Marketing Manager:

Jim McLaws  
[jdm@jetlubecanada.com](mailto:jdm@jetlubecanada.com)

### Technical Service:

Neil Ruel  
[neilr@jetlubecanada.com](mailto:neilr@jetlubecanada.com)

### Inside Sales:

Maleena Carreiro  
[maleenab@jetlubecanada.com](mailto:maleenab@jetlubecanada.com)



Copyright©2012 - All images, photographs, logos and content are the property of Jet-Lube Inc. and Jet-Lube of Canada Ltd. These files are provided for information only and cannot be altered, disseminated or used in any way except by express permission of Jet-Lube of Canada Ltd.